



Escape

QuietBack™ Carpet Tile

acoufelt
making quiet

Product Detail


Product	Escape Carpet Tile
Surface	Floor
Composition	100% Solution dyed nylon
Material	QuietBack™
Style	Multi-level textured loop pile
Content	QuietBack™ => 80% recycled PET content
Dimension	19.7" x 19.7"
Thickness	10mm +/- 1mm 0.39" +/- 0.04"

Technical Data

Dimensional Stability	BS EN 986
Electrostatic Propensity	AATCC 134, ≤ 1.0 KV
Light Fastness	ISO 105 B02, min 6
Thermal Resistance	1.14ft ² °F/BTU
Fire Test Method Number	AS/ISO 9239.1-2003
Critical Radiant Flux	Mean result 7.4kW/m ²
Smoke Dev Rate	Mean result 175% min ASTM E648 Class 1
Critical Radiant Flux Standard Deviation	0.54W/cm ² 0.01W/cm ² EN 13501-1:2019
Fire Behaviour	Cfl
Smoke Protection	s1


Acoustic Performance

Sound Absorption ISO 354-2003 NRC 0.40

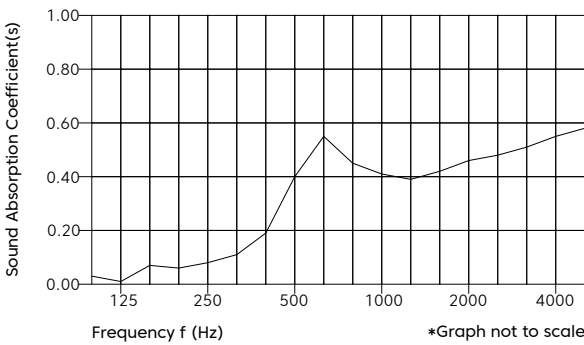

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
α _s	0.01	0.08	0.40	0.41	0.46	0.55	0.40


Installation Method

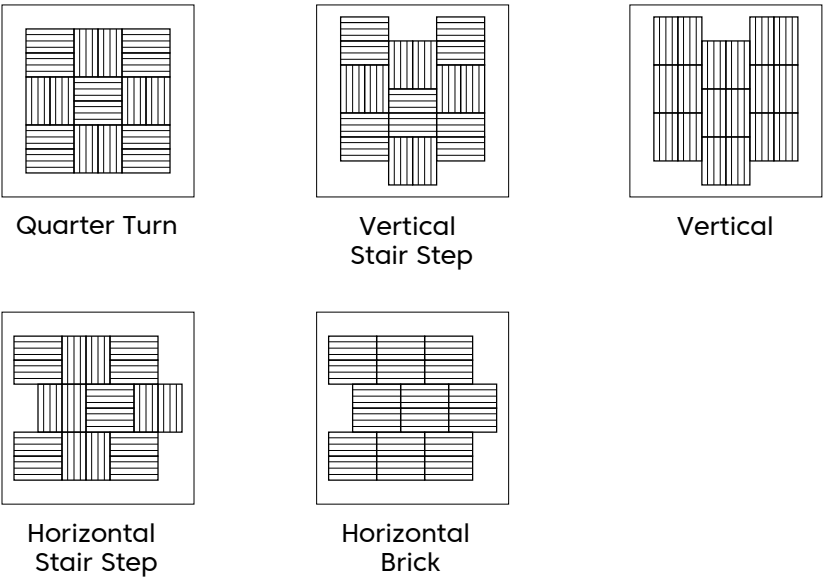

Guarantees

Lead Time	Ships in 4-6 weeks
Wear Warranty	20 Years*
Castor Chair Proof	20 Years*
Anti-Static	Lifetime*
Colorfast	20 Years*
Classification	Commercial extra heavy duty

* conditions apply



Regular hard or felt backed tile reflects more sound.



Carpet tile featuring QuietBack™ absorbs more sound.

Environmental Attributes

- Declare Certification
- LCB Red List Free
- Low VOC
- Aligns With Building Standards




Declare.


Colorways




Granite
EA03

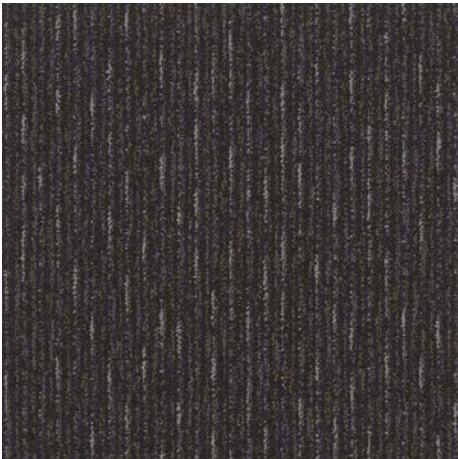

Boathouse
EA04

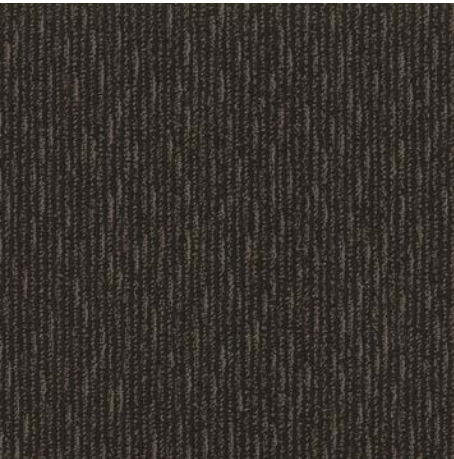


Castle
EA05

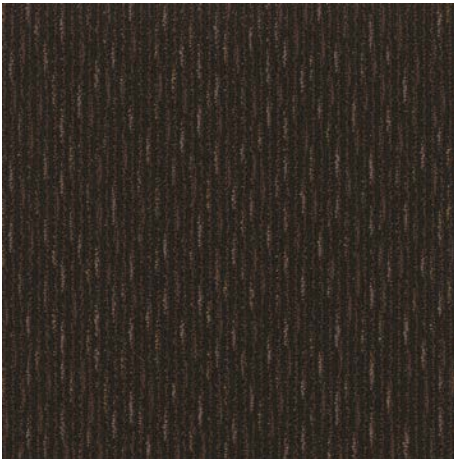


Safari
EA06



Parklands
EA07

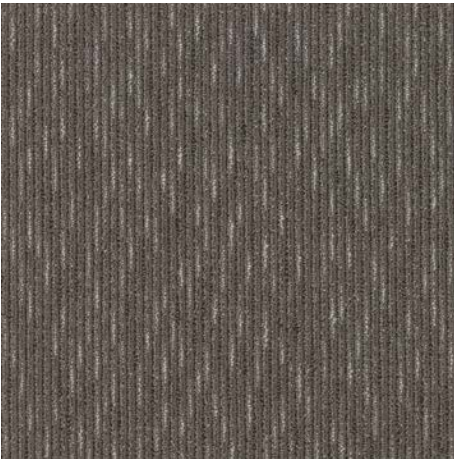

Cascade
EA08

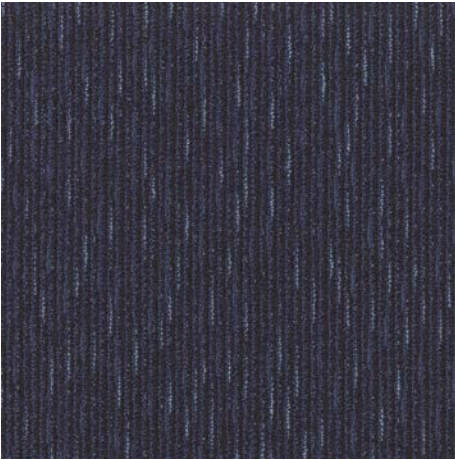

Ocean
EA09



Desert
EA11



Mountain
EA12