



Monitor

QuietBack™ Carpet Tile

acoufelt
making quiet

Product Detail


Product	Monitor Carpet Tile
Surface	Floor
Composition	100% Solution dyed nylon
Material	QuietBack™
Style	Multi-level textured loop pile
Content	QuietBack™ => 80% recycled PET content
Dimension	9.8" W x 39.4" L
Thickness	8mm +/- 1mm 0.31" +/- 0.04"

Technical Data

Dimensional Stability	BS EN 986
Electrostatic Propensity	AATCC 134, ≤ 1.0 KV
Light Fastness	ISO 105 B02, min 6
Thermal Resistance	1.14ft ² °F/BTU
Fire Test Method Number	AS/ISO 9239.1-2003
Critical Radiant Flux	Mean result 3.2kW/m ²
Smoke Dev Rate	Mean result 209% min
	ASTM E648 Class 1
Critical Radiant Flux	0.54W/cm ²
Standard Deviation	0.01W/cm ²


Acoustic Performance

Sound Absorption ASTM C423-09a NRC 0.35

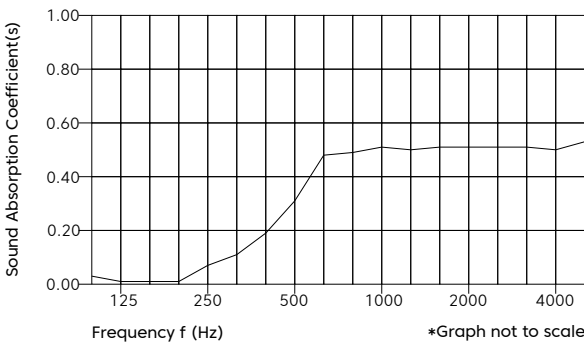


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
α_s	0.01	0.07	0.31	0.51	0.51	0.50	0.35


Installation Method




Quarter Turn




Herringbone



Vertical



Plank
Half-Lap




Horizontal
Brick

Guarantees

Lead Time	Ships in 4-6 weeks
Wear Warranty	20 Years*
Castor Chair Proof	20 Years*
Anti-Static	Lifetime*
Colorfast	20 Years*
Classification	Commercial extra heavy duty

* conditions apply



Regular hard or felt backed tile reflects more sound.



Carpet tile featuring QuietBack™ absorbs more sound.


Environmental Attributes

- Declare Certification
- LCB Red List Free
- Low VOC
- Aligns With Building Standards



Declare.

Colorways

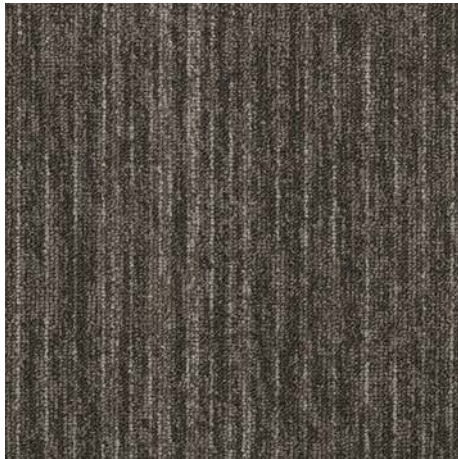

Channel
MO01



Circuit
MO02



Control
MO03




Cable
MO04



Cable Red
MO05



Cable Blue
MO06

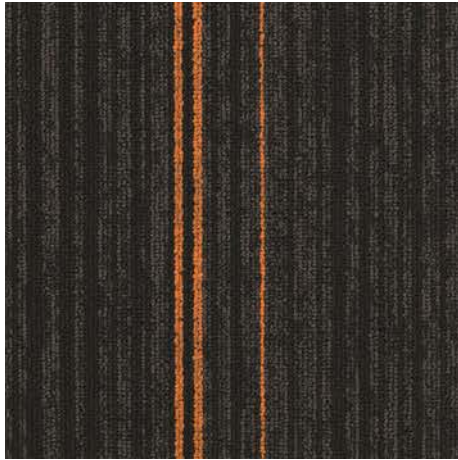

Cable Orange
MO07



Cable Green
MO08