



Urban

QuietBack™ Carpet Tile

acoufelt
making quiet

Product Detail


Product	Urban Carpet Tile
Surface	Floor
Composition	100% Solution dyed nylon
Material	QuietBack™
Style	Multi-level textured loop pile
Content	QuietBack™ => 80% recycled PET content
Dimension	19.7" x 19.7"
Thickness	10mm +/- 1mm 0.39" +/- 0.04"

Technical Data

Dimensional Stability	BS EN 986
Electrostatic Propensity	AATCC 134, ≤ 1.0 KV
Light Fastness	ISO 105 B02, min 6
Thermal Resistance	1.14ft ² °F/BTU
Fire Test Method Number	AS/ISO 9239.1-2003
Critical Radiant Flux	Mean result 7.4kW/m ²
Smoke Dev Rate	Mean result 175% min ASTM E648 Class 1
Critical Radiant Flux Standard Deviation	0.54W/cm ² 0.01W/cm ² EN 13501-1:2019
Fire Behaviour	Cfl
Smoke Protection	s1


Acoustic Performance

Sound Absorption ISO 354-2003 NRC 0.40

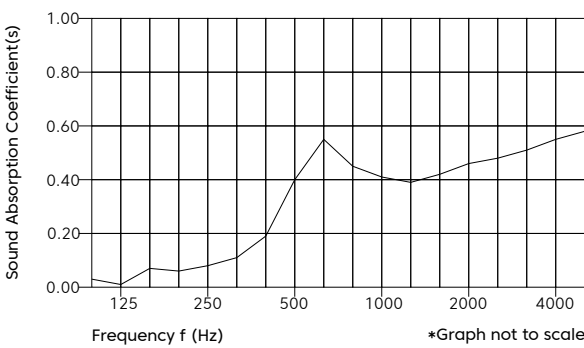


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
α_s	0.01	0.08	0.40	0.41	0.46	0.55	0.40


Installation Method




Quarter Turn




Vertical
Stair Step



Vertical



Horizontal
Stair Step




Horizontal
Brick

Guarantees

Lead Time	Ships in 4-6 weeks
Wear Warranty	20 Years*
Castor Chair Proof	20 Years*
Anti-Static	Lifetime*
Colorfast	20 Years*
Classification	Commercial extra heavy duty

* conditions apply



Regular hard or felt backed tile
reflects more sound.



Carpet tile featuring QuietBack™
absorbs more sound.


Environmental Attributes

- Declare Certification
- LCB Red List Free
- Low VOC
- Aligns With Building Standards




Declare.

Colorways

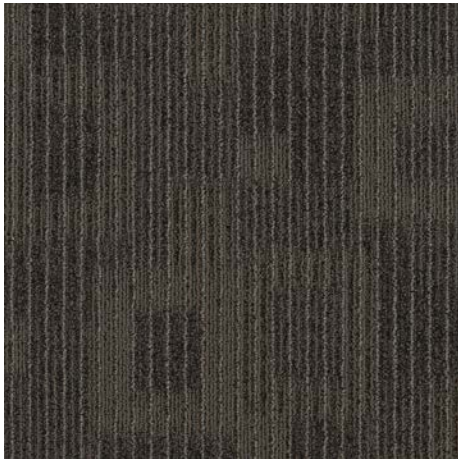

Welsh Slate
UR03

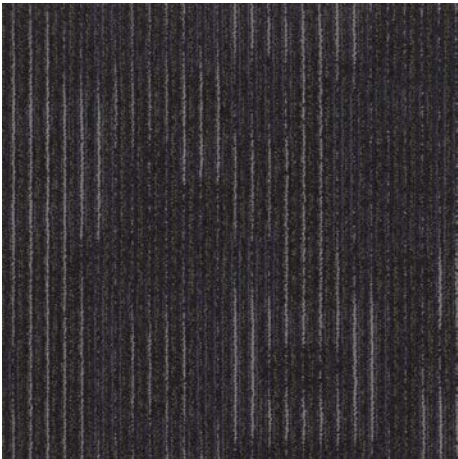

Sydney Harbour
UR04




Manhattan Sidewalk
UR05



Monterrey Hills
UR06



Paris Gardens
UR07

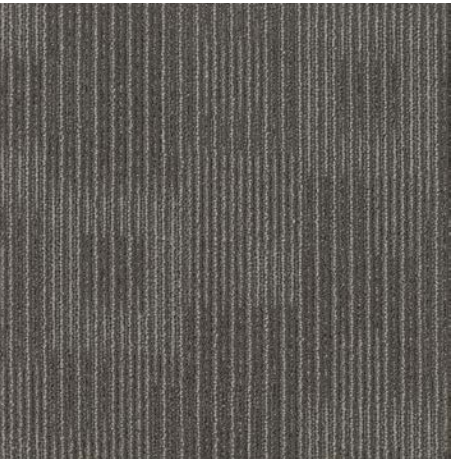

London Fog
UR08



Singapore Plaza
UR10



Dubai Sands
UR11



Milan Stone
UR12