



# Leadlight

FilaSorb™ 12

acoufelt  
making quiet



# Product Detail


Product	Leadlight
Surface	Wall
Composition	100% Polyester
Material	FilaSorb™
Recycled Content	60% min.
Thickness	12mm   0.47" +/- 10%
Weight	0.49 lb/ft <sup>2</sup> +/- 10%
Dimension	12"W x 24"H
	Custom size available upon request.

# Technical Data

Fire Test Method Number	AS ISO 9705:Group 1 ASTM E84-17a Class A
Indoor Air Quality	Low VOCs emission, formaldehyde and Phenol-free
Light Fastness	ISO 105-B02 1994, 6-7

# Acoustic Performance

Sound Absorption ISO 354-2006 NRC 0.45

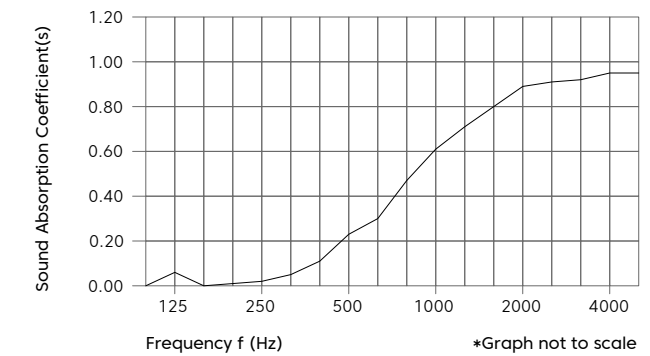

Frequency f(Hz)	125	250	500	1000	2000	4000	NRC
12mm α <sub>s</sub>	0.06	0.02	0.23	0.61	0.89	0.95	0.45

# Guarantees

Lead Time	Ships in 4-6 weeks
Light Fastness Warranty	10 Years*
Customizable	Yes

\* conditions apply

# Environmental Attributes


- Declare Certification
- LCB Red List Free
- Phenol And Formaldehyde Free
- Low VOC
- CDPH Compliance
- Aligns With Building Standards



# Leadlight Pattern

---


Leadlight

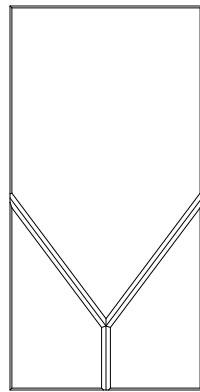


## Recommended Layouts

---


Layout 1

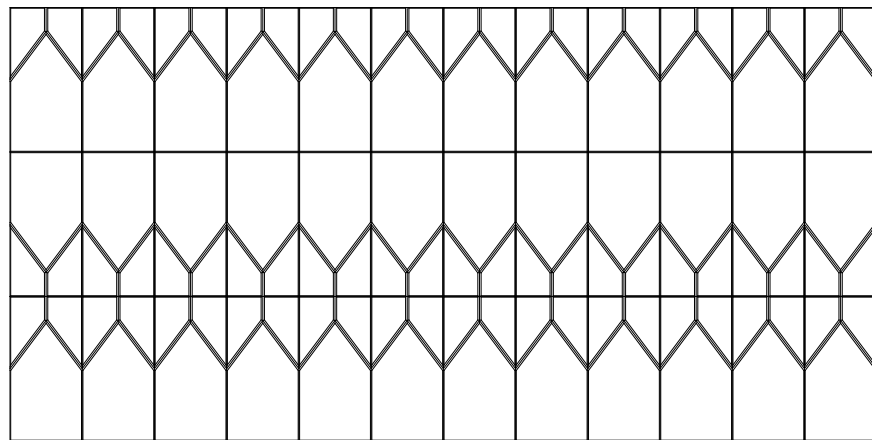

Layout 2

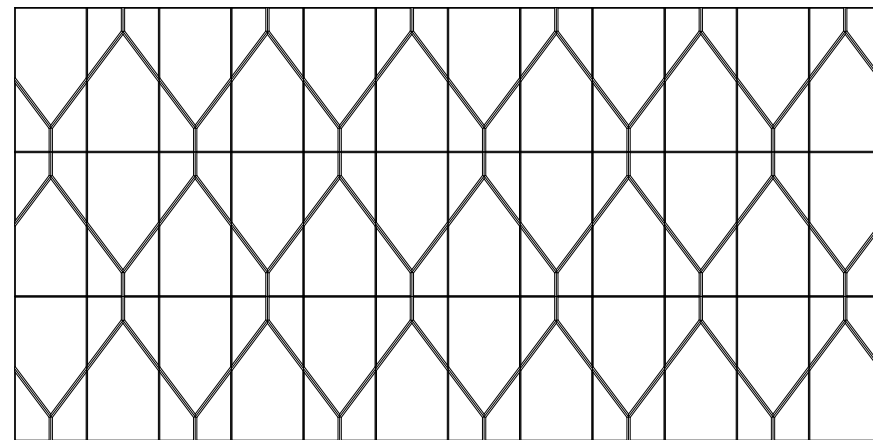


Layout 3

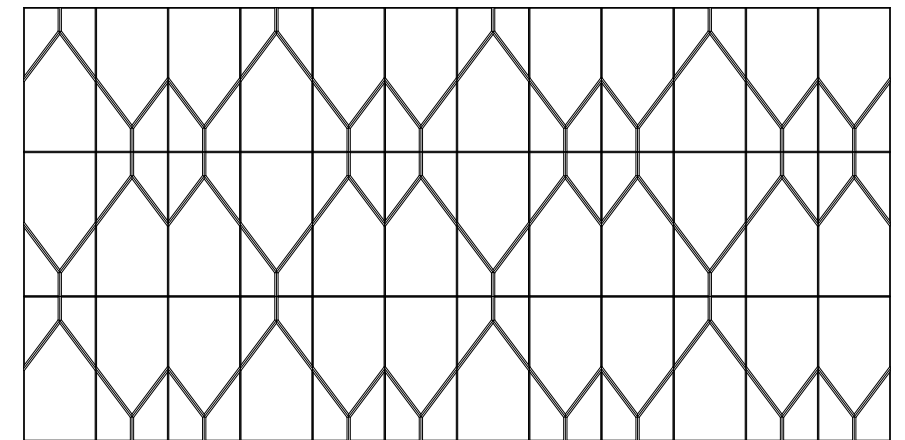

# Mounting Methods

---

## Adhesive Backing

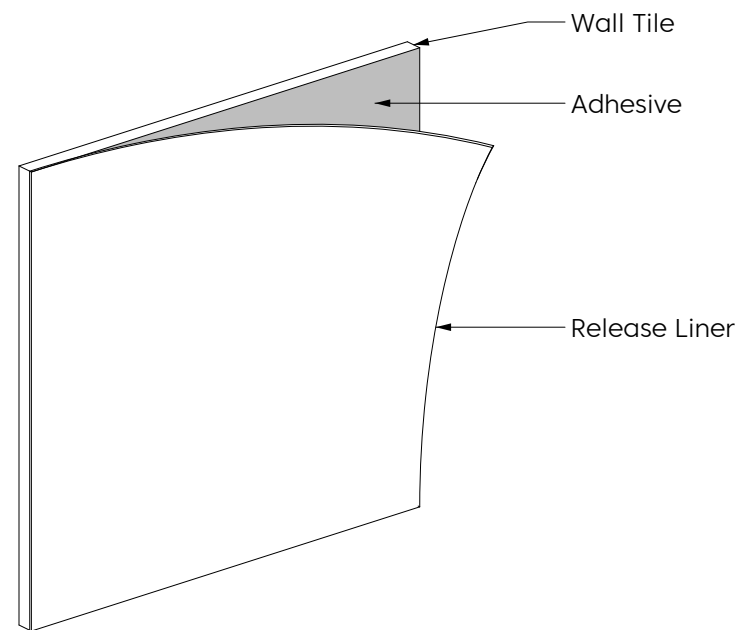

## Construction Adhesive

