



# Solid Panel

FilaSorb™ 24

acoufelt  
making quiet

# Product Detail

Product	Solid Panel
Surface	Wall or Ceiling
Composition	100% Polyester
Material	FilaSorb™
Recycled Content	60% min.
Material Thickness	24mm   0.94" +/- 10%
Weight	0.98 lb/ft <sup>2</sup> +/- 10%
Standard Dimensions	See page 3 for size offerings. Custom size available upon request.
Lead Time	Ships in 4-6 weeks
Light Fastness Warranty	10 Years*


\* conditions apply

# Technical Data

Fire Test Method Number	AS ISO 9705:Group 1 ASTM E84-17a Class A
Indoor Air Quality	Low VOCs emission, formaldehyde and Phenol-free
Light Fastness	ISO 105-B02 1994, 6-7

# Acoustic Performance

Sound Absorption ISO 354-2006 NRC 0.60

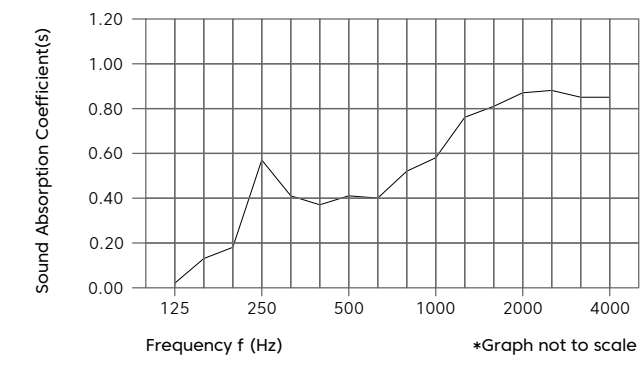

Frequency f(Hz)	125	250	500	1000	2000	4000	NRC
24mm α <sub>s</sub>	0.02	0.57	0.41	0.58	0.87	0.85	0.60

# Colorways

\* [Go To Colorway Page](#)



 Manufactured & Assembled in the USA


# Environmental Attributes

- Declare Certification
- LBC Red List Free
- Phenol And Formaldehyde Free
- Low VOC
- CDPH Compliance
- Aligns With Building Standards




# Design

## Elevation

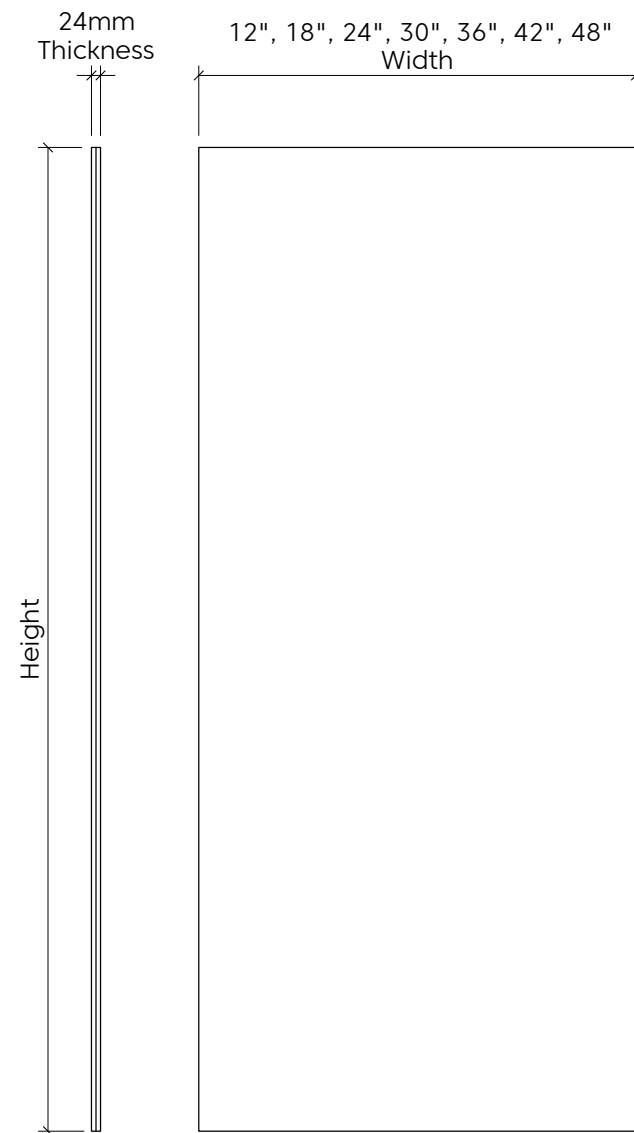

## Perspective

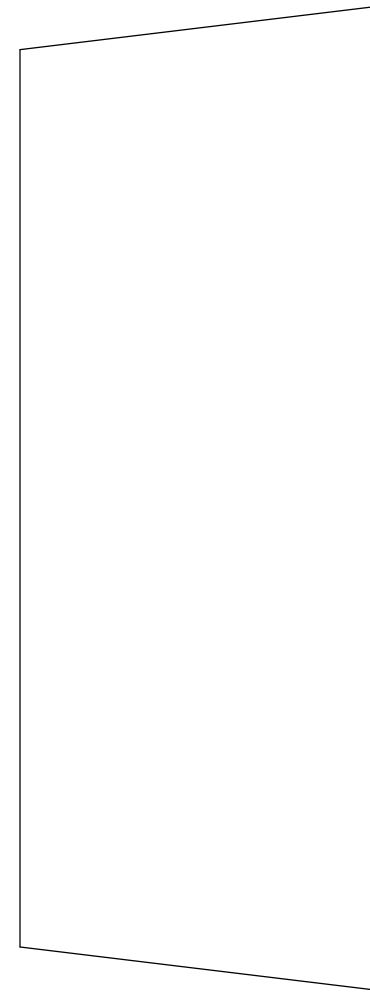


## Standard Size Offerings


Standard Heights		
12"H	48"H	84"H
18"H	54"H	90"H
24"H	60"H	96"H
30"H	66"H	102"H
36"H	72"H	108"H
42"H	78"H	110"H

# Mounting Methods


## Adhesive Backing

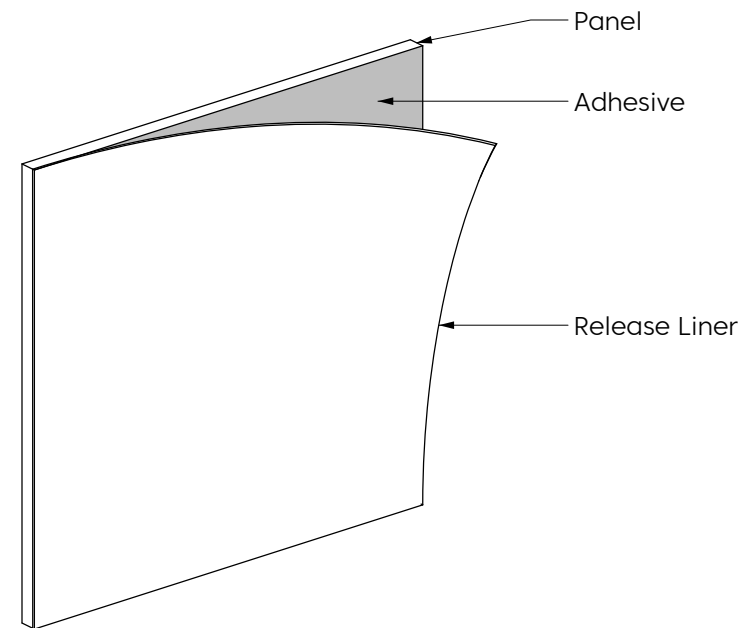

## Construction Adhesive

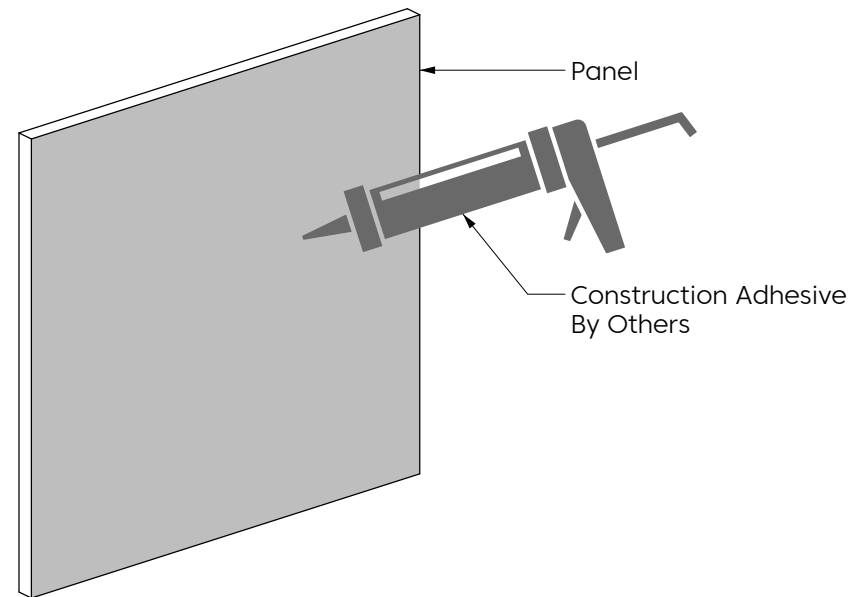

## Z-Clip Wall Mount

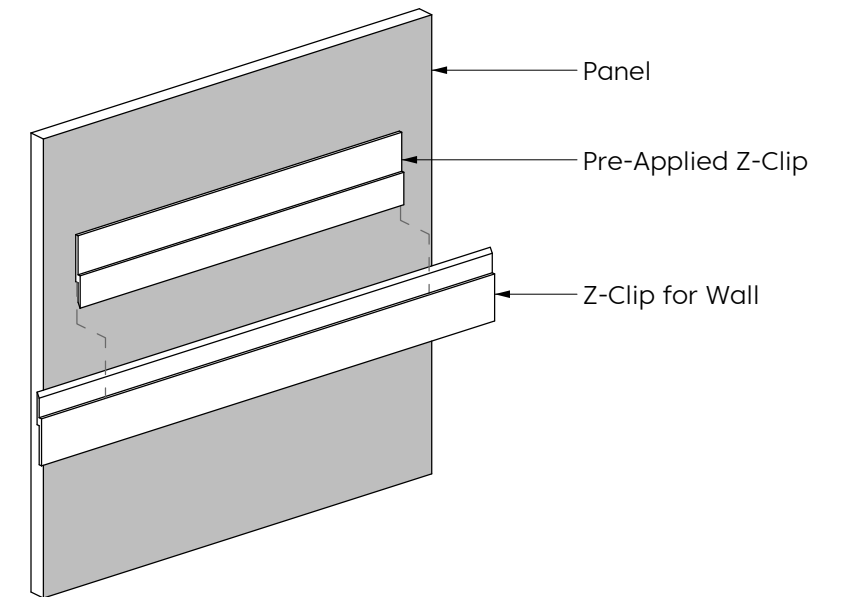

\*For wall mount application only