
acoufelt

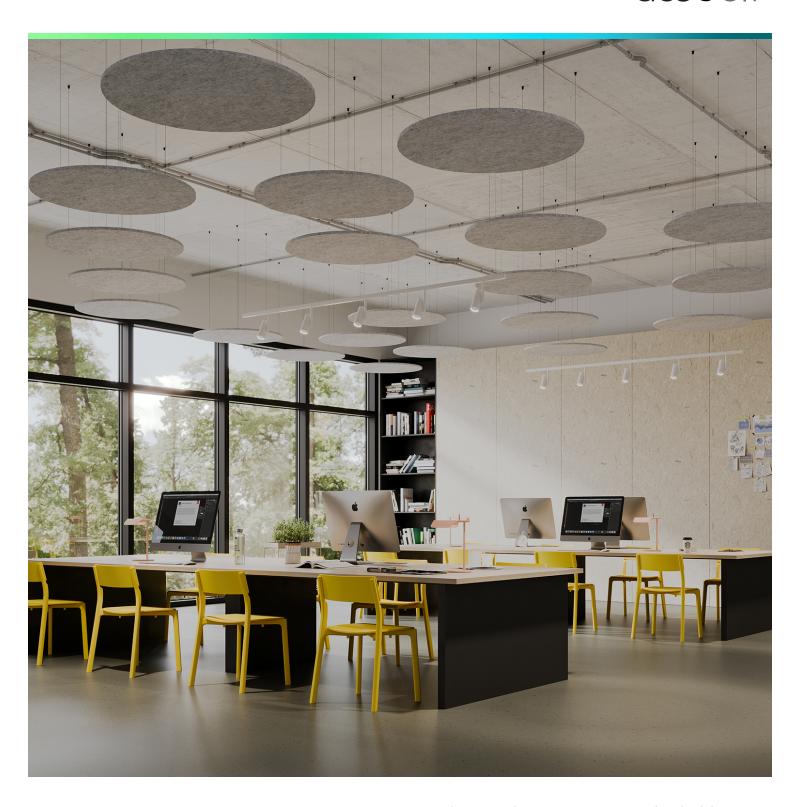

CircleCeiling Clouds

Essentials Collection

A modern approach to quieting noisy areas, ceiling clouds hang flat below the ceiling system to provide focused sound absorption. As standalone free-hanging unit or grouped to add an artistic touch wherever crowds gather, Circle ceiling clouds can be an economical, effective solution for a wide range of settings.

Specifications

Surface	Ceiling	
Material	WhispaTex [™] polyester felt	
Thickness	3/4", 18mm (±10%)	
Weight	0.34 lb./ft²(±10%)	
Standard Sizes	24", 30", 36", 42", 48" diameter	



Circle Ceiling Clouds in Pumice

Technical

NRC Rating	Material: 0.35 Product: Testing is pending
Fire Test	ASTM E84, Class 1 Flame spread index: 7 Smoke developed index: 160
Colorfastness	ISO 105-B02, 4

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 12 years* Colorfastness: 12 years*

^{*} Conditions apply

Environmental

Recycled Content	Minimum 55%	
Indoor Air Quality	VOC less than/equal to 0.5mg/m3	
Recyclable	100%*	
Certifications	tifications TVOC Emissions Rate	

 $[\]hbox{* \it PET is recyclable through participating partners.}$

Colorways

ESSENTIALS




Sizes


Standard Sizes	24", 30", 36", 42", 48" diameter
Staliual u Sizes	24 , 30 , 30 , 42 , 40 Ulailletei

Thickness	3/4", 18mm (±10%)
HILLKIICSS	3/7 , IOIIIII (±10/0)

Perspective



Plan





18mm thickness




Hardware Spacing

24" DIA	12" on center spacing
30, 36" DIA	18" on center spacing
42, 48" DIA	24" on center spacing

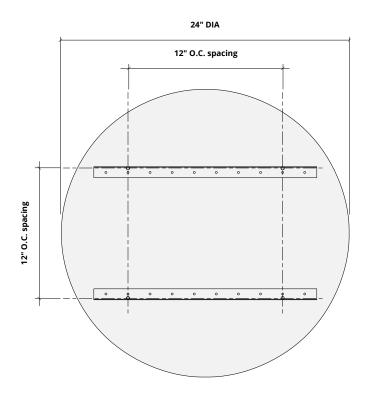


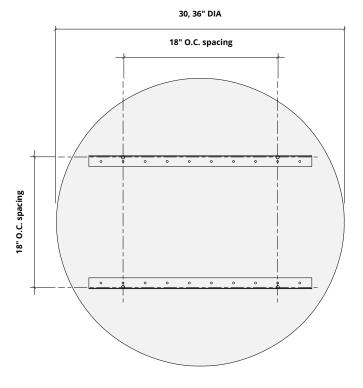

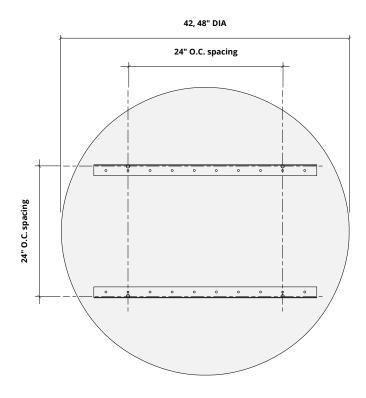

Mounting Methods

Cable

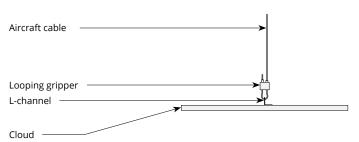

Cable to deck


2-piece cable coupler with
1/4"-20 female thread

Aircraft cable

Looping gripper

L-channel

Cable to T-grid

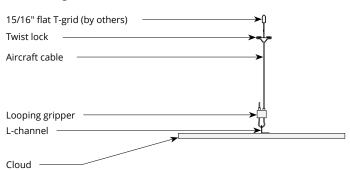

Cable to Unistrut

