


Truss Ceiling Baffles

Essentials Collection

Suspended as a single beam or grouped for a strong visual and acoustic impact, Truss baffles are a simple, smart solution for reducing noise. Choose from a selection of classic colors and a range of sizes to efficiently achieve a more comfortable, welcoming space.

Specifications

Surface	Ceiling
Material	WhisperTex™ polyester felt
Thickness	3/8", 9mm (±10%)
Weight	0.34 lb./ft ² (±10%)
Standard Sizes	Height: 3" up to 20" H (1" increments) Depth: 2" up to 12" D (1" increments) Length: 12" up to 108" L (6" increments), 110" L <i>See page 3 for more details. Custom sizes available</i>

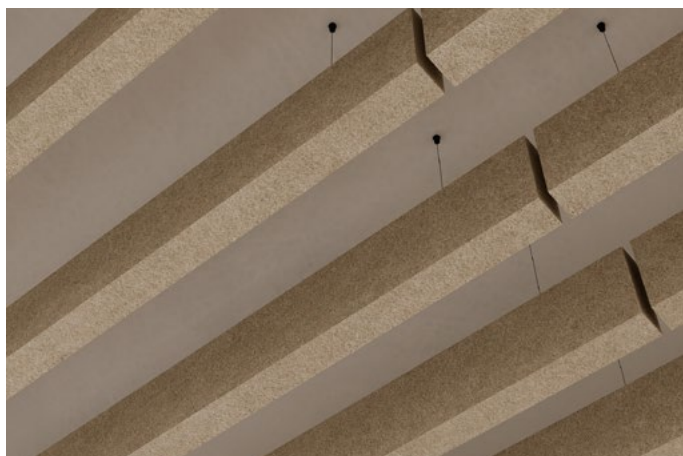

Truss Ceiling Baffles in Limestone

Technical

NRC Rating	Material: 0.35 Product: Testing is pending
Fire Test	ASTM E84, Class 1 Flame spread index: 7 Smoke developed index: 160
Colorfastness	ISO 105-B02, 4

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 12 years* Colorfastness: 12 years*

* Conditions apply

Environmental


Recycled Content	Minimum 55%
Indoor Air Quality	VOC less than/equal to 0.5mg/m ³
Recyclable	100%*
Certifications	TVOC Emissions Rate

* PET is recyclable through participating partners.




Colorways

ESSENTIALS




Talc
TA08



Limestone
LI07



Silt
SI06

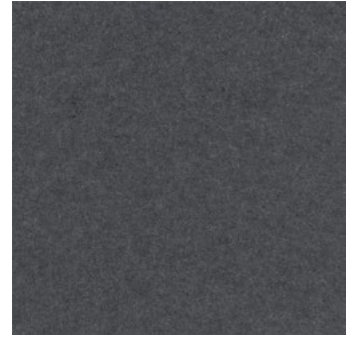

Shale
SH03



Pumice
PU05



Gypsum
GY04



Jade
JA02



Basalt
BA01

Order samples at acoufelt.com/colorways


Sizes

Standard Sizes Height: 3" up to 20" H (1" increments)
 Depth: 2" up to 12" D (1" increments)
 Length: 12" up to 108" L (6" increments), 110" L
Custom sizes available

Thickness 3/8", 9mm (±10%)






	3"H	4"H	5"H	6"H	7"H	8"H	9"H	10"H	11"H	12"H	13"H	14"H	15"H	16"H	17"H	18"H	19"H	20"H	
2"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
5"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
7"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
8"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
9"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
10"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
11"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
12"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

■ Standard sizes

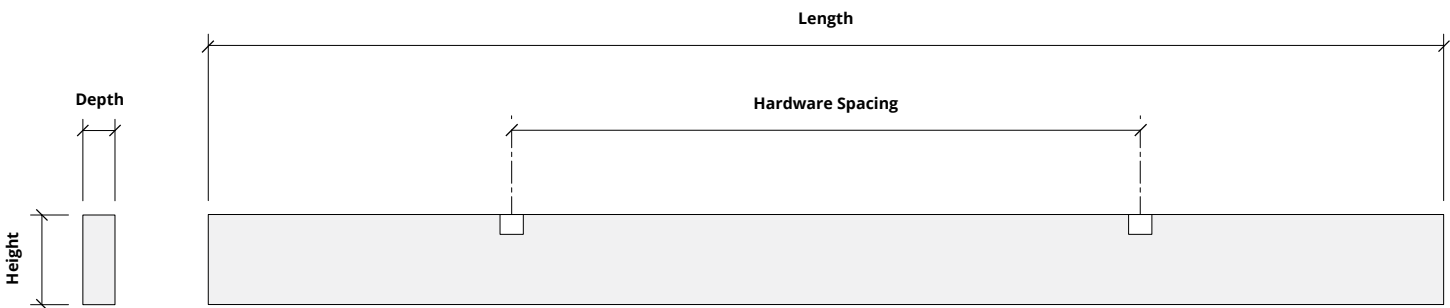


Hardware Spacing

12, 18" L	6" on center spacing
24, 30" L	12" on center spacing
36, 42, 48, 54" L	24" on center spacing
60, 66, 72, 78, 84, 90" L	48" on center spacing
96, 102, 108, 110" L	60" on center spacing

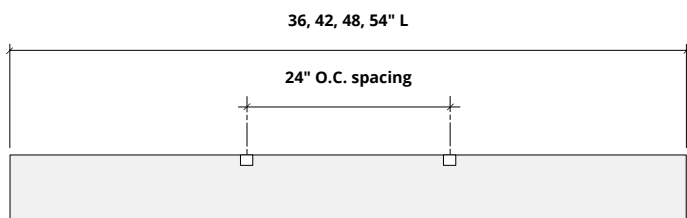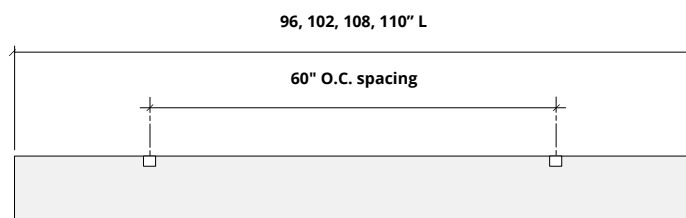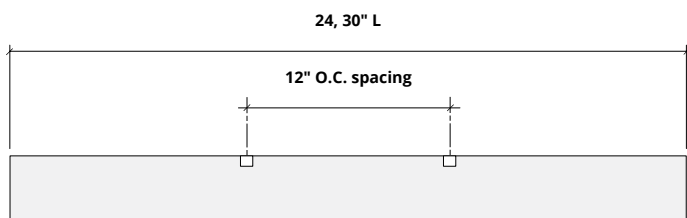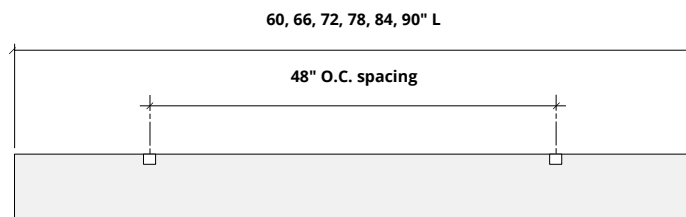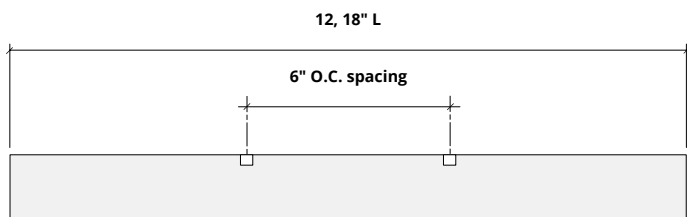


Mounting Methods


Cable

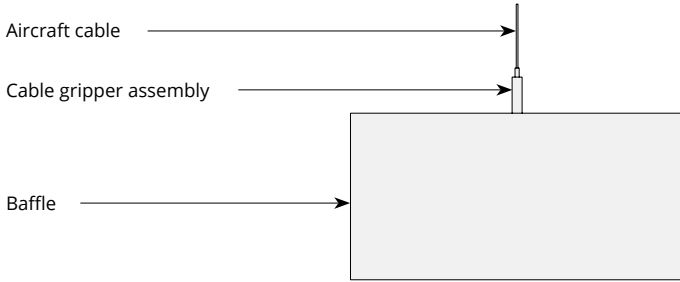


Cable to deck

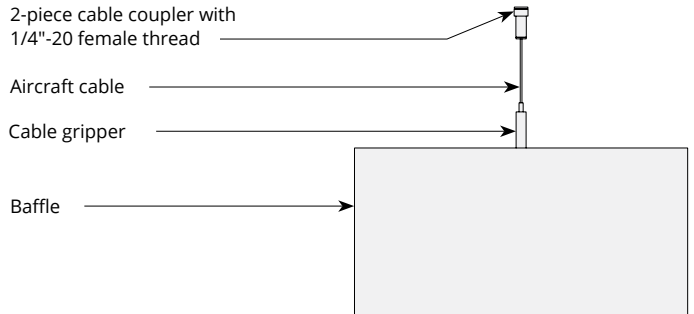


Cable to T-grid

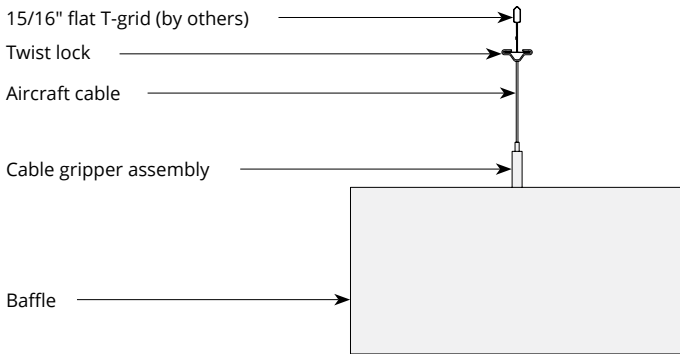


Cable to Unistrut

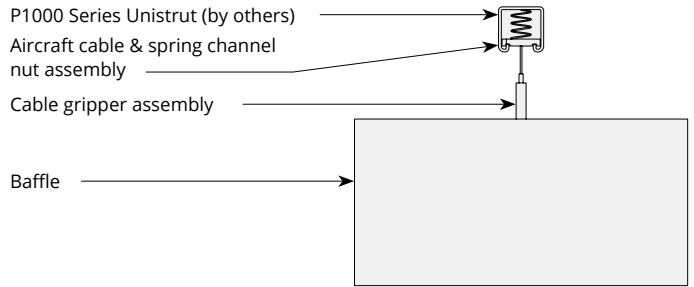

Swivel cable to deck

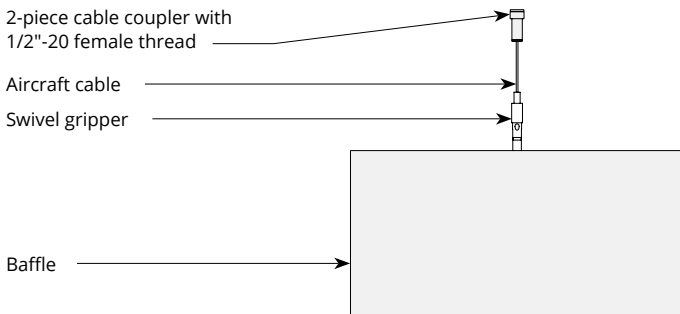


Magnet to T-grid

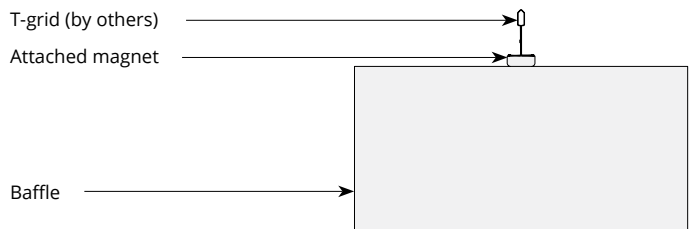


Mounting Methods cont'd.


Threaded rod

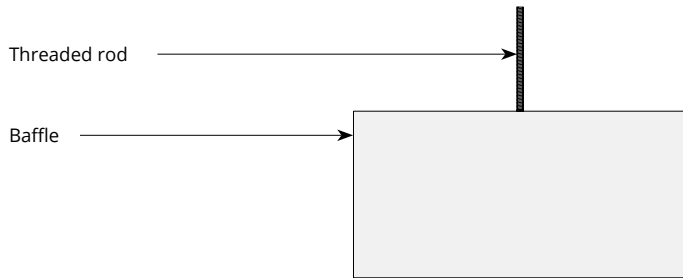

Threaded rod to Unistrut

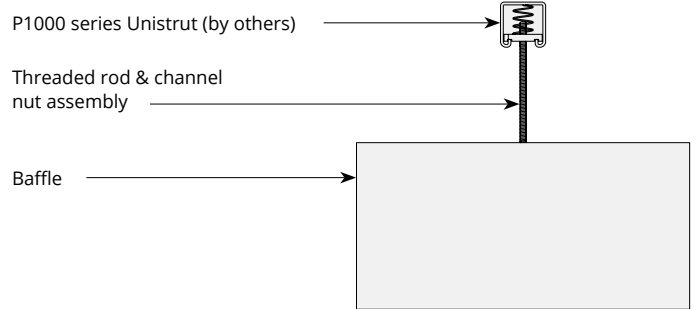

Direct to Unistrut

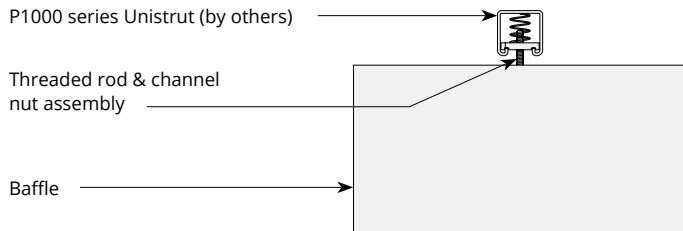

Twist lock to T-grid

