



Truss Ceiling Baffles

Essentials Collection

Suspended as a single beam or grouped for a strong visual and acoustic impact, Truss baffles are a simple, smart solution for reducing noise. Choose from a selection of classic colors and a range of sizes to efficiently achieve a more comfortable, welcoming space.

Specifications

Surface	Ceiling
Material	WhisperTex™ polyester felt
Thickness	3/8", 9mm (±10%)
Weight	0.34 lb./ft ² (±10%)
Standard Sizes	Height: 3" up to 20" H (1" increments) Depth: 2" up to 12" D (1" increments) Length: 12" up to 108" L (6" increments), 110" L <i>See page 3 for more details. Custom sizes available</i>



Truss Ceiling Baffles in Limestone

Technical

NRC Rating	Material: 0.35 Product: Testing is pending
Fire Test	ASTM E84, Class 1 Flame spread index: 7 Smoke developed index: 160
Colorfastness	ISO 105-B02, 4

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 12 years* Colorfastness: 12 years*

* Conditions apply

Environmental


Recycled Content	Minimum 55%
Indoor Air Quality	VOC less than/equal to 0.5mg/m ³
Recyclable	100%*
Certifications	TVOC Emissions Rate

* PET is recyclable through participating partners.



Colorways

ESSENTIALS




Talc
TA08



Limestone
LI07



Silt
SI06

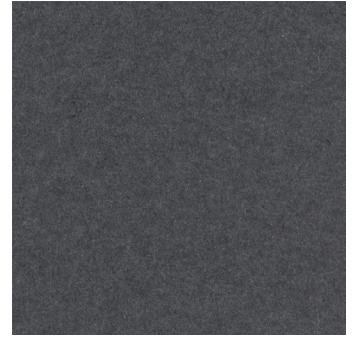


Shale
SH03



Pumice
PU05



Gypsum
GY04



Jade
JA02



Basalt
BA01

Order samples at acoufelt.com/colorways



Call **800.966.8557** with questions or visit acoufelt.com for more product information, downloads, and colorways.


Sizes

Standard Sizes Height: 3" up to 20" H (1" increments)
 Depth: 2" up to 12" D (1" increments)
 Length: 12" up to 108" L (6" increments), 110" L
Custom sizes available

Thickness 3/8", 9mm (±10%)






	3"H	4"H	5"H	6"H	7"H	8"H	9"H	10"H	11"H	12"H	13"H	14"H	15"H	16"H	17"H	18"H	19"H	20"H
2"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
3"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
4"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
5"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
6"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
7"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
8"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
9"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
10"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
11"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
12"D	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard

Standard sizes

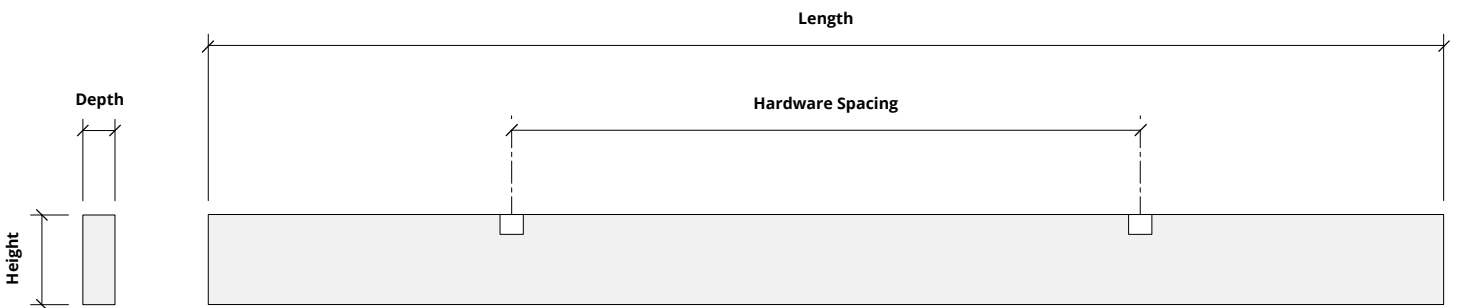


Hardware Spacing

12, 18" L	6" on center spacing
24, 30" L	12" on center spacing
36, 42, 48, 54" L	24" on center spacing
60, 66, 72, 78, 84, 90" L	48" on center spacing
96, 102, 108, 110" L	60" on center spacing

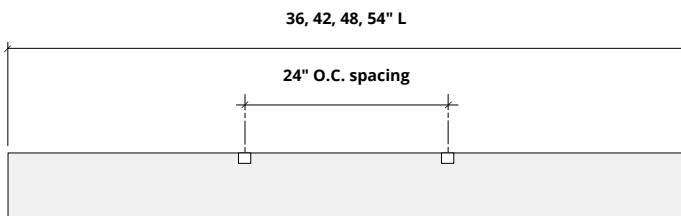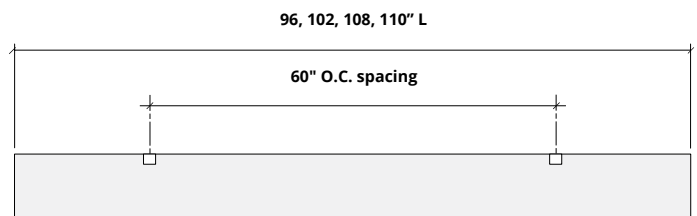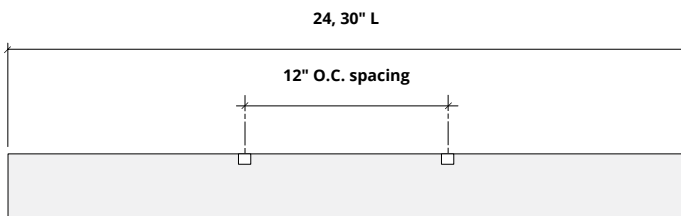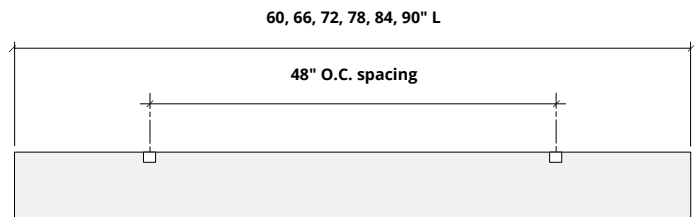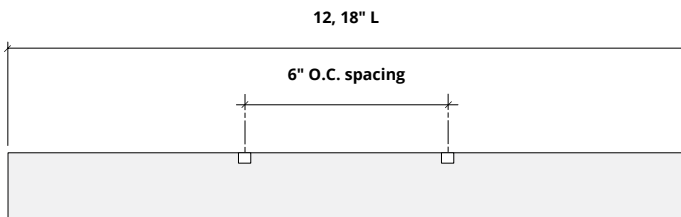


Mounting Methods


Cable

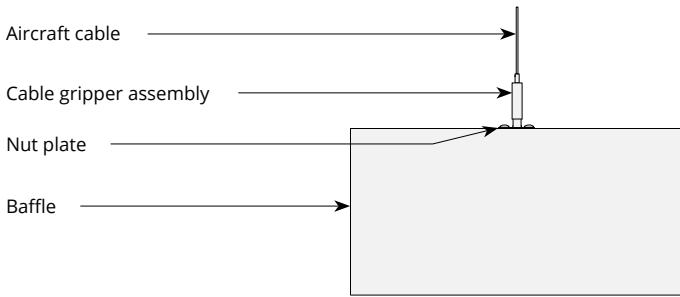


Cable to deck

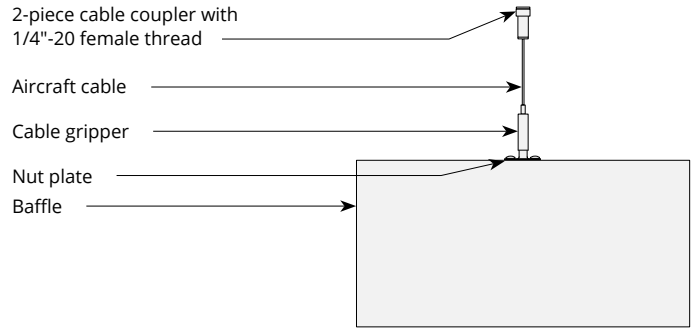


Cable to T-grid

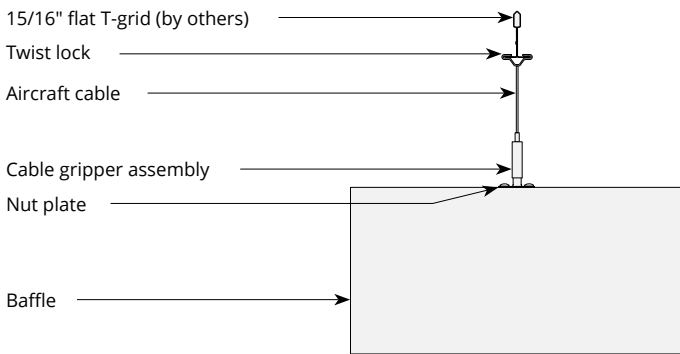

Cable to Unistrut

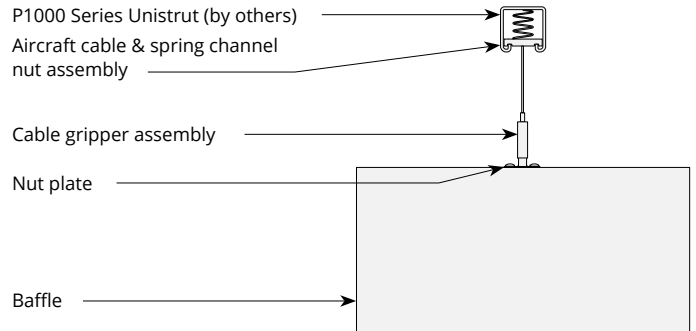


Swivel cable to deck

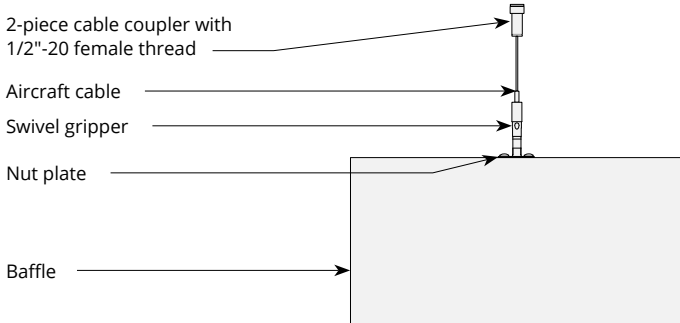


Mounting Methods cont'd.

Threaded rod

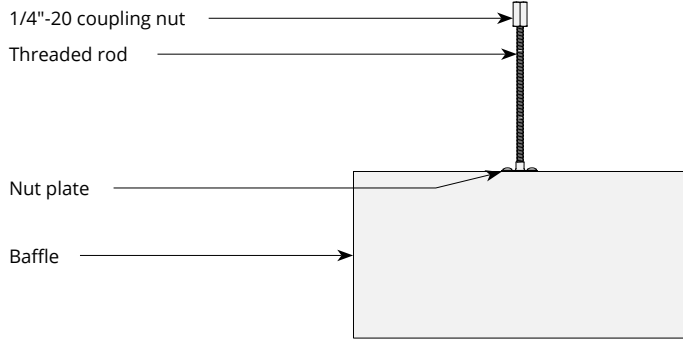

Threaded rod to Unistrut

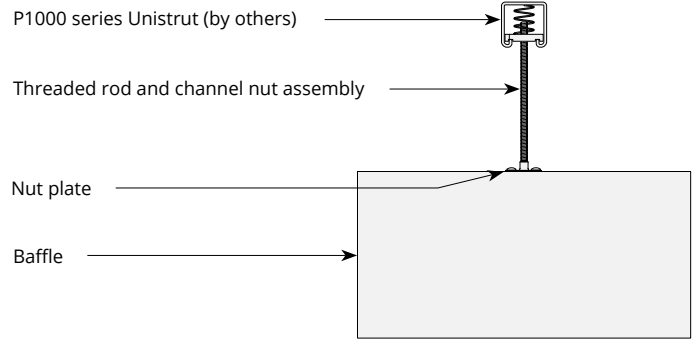

Twist lock to T-grid

