




## Truss LED Ceiling Baffles

WoodGrain Collection

Popular Truss ceiling baffles with integrated LED lighting produce a lean, aerodynamic look. Diffused LED lighting channels embedded in sound absorbing baffles reduce noise while efficiently illuminating the space. Acoufelt's advanced manufacturing technology gives you the latitude to specify a standard lighting option or embed your own lighting components.

## Specifications

<b>Surface</b>	Ceiling
<b>Material</b>	FilaSorb™ polyester felt
<b>Thickness</b>	1/2", 12mm (±10%)
<b>Weight</b>	0.49 lb./ft <sup>2</sup> (±10%)
<b>Standard Sizes</b>	Height: 3" up to 20" H (1" increments) Depth: 3" up to 12" D (1" increments) Length: 12" up to 108" L (6" increments), 110" L <i>See page 4 for more details. Custom sizes available</i>

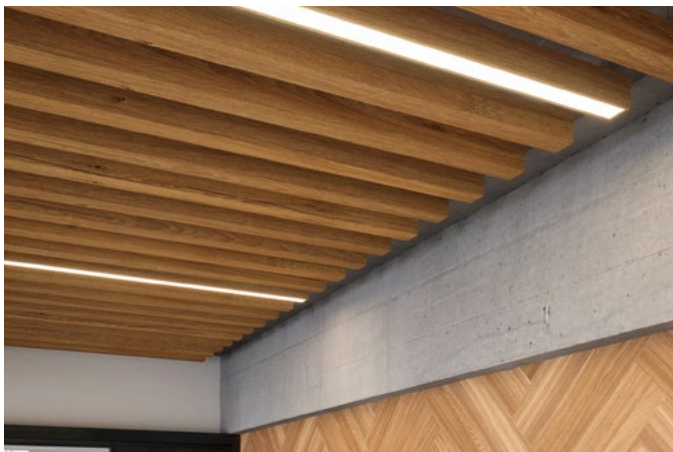

Truss LED Ceiling Baffle in Log Cabin

## Technical

<b>NRC Rating</b>	1.65
<b>Fire Test</b>	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
<b>Water Sorption</b>	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
<b>Colorfastness</b>	ISO 105-B02, 6-7

## Details

<b>Lead Time</b>	3 – 6 weeks
<b>Origin</b>	Manufactured and assembled in the US
<b>Warranty</b>	Product: 20 years* Colorfastness: 20 years*

\* Conditions apply

## Environmental

<b>Recycled Content</b>	Minimum 60%
<b>Energy</b>	Generated using 40% solar energy
<b>Indoor Air Quality</b>	VOC less than/equal to 0.5mg/m3
<b>Recyclable</b>	100%*
<b>Certifications</b>	Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

\* PET is recyclable through participating partners.




Call **800.966.8557** with questions or visit **acoufelt.com** for more product information, downloads, and colorways.

# Colorways


## WOODGRAIN




Boat Shed  
WQ02




Picket Fence  
WQ01



Loft  
WQ06



Nordic Plank  
WQ15




White Oak  
WQ13



Baltic Birch  
WQ12



White Elm  
WQ07




Lyed Larch  
WQ30




Woodland Fog  
WQ22




Weathered Slate  
WQ14




French Bobbin  
WQ08




Boardwalk  
WQ10




Mountain Lodge  
WQ24




Wine Barrel  
WQ03



Natural Oak  
WQ16




Knotty Spruce  
WQ29



Shadow Oak  
WQ28




Driftwood  
WQ21




Mocha Legno  
WQ25



Teak  
WQ18




Fumed Oak  
WQ19



European Larch  
WQ17



Petrified Ash  
WQ23




Log Cabin  
WQ04




Charred Larch  
WQ09




Barn Door  
WQ05




Antique Chest  
WQ11



Scorched Timber  
WQ26



Espresso Oak  
WQ27



Black Walnut  
WQ20

Order samples at [acoufelt.com/colorways](https://acoufelt.com/colorways)


# Sizes

**Standard Sizes**      Height: 3" up to 20" H (1" increments)  
 Depth: 3" up to 12" D (1" increments)  
 Length: 12" up to 108" L (6" increments), 110" L  
*Custom sizes available*

**Thickness**            1/2", 12mm (±10%)






	3"H	4"H	5"H	6"H	7"H	8"H	9"H	10"H	11"H	12"H	13"H	14"H	15"H	16"H	17"H	18"H	19"H	20"H
3"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
5"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
7"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
8"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
9"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
10"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
11"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
12"D	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

■ Standard sizes

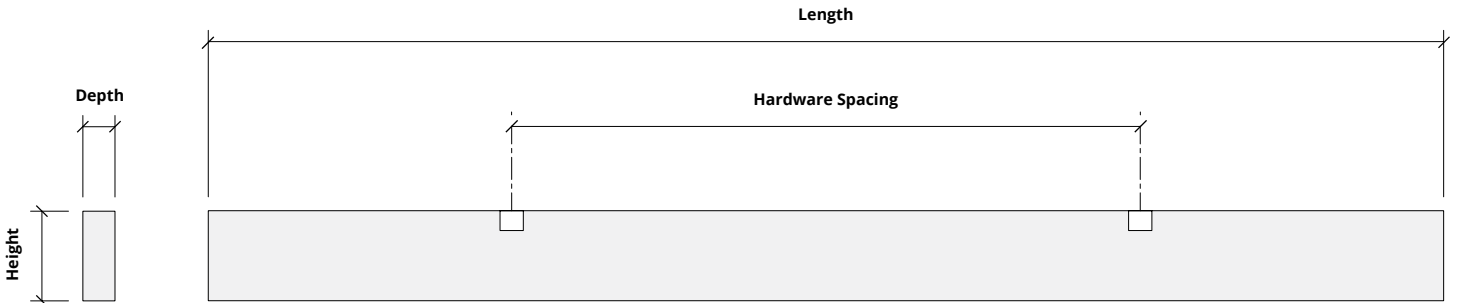


# Hardware Spacing

<b>12, 18" L</b>	6" on center spacing
<b>24, 30" L</b>	12" on center spacing
<b>36, 42, 48, 54" L</b>	24" on center spacing
<b>60, 66, 72, 78, 84, 90" L</b>	48" on center spacing
<b>96, 102, 108, 110" L</b>	60" on center spacing

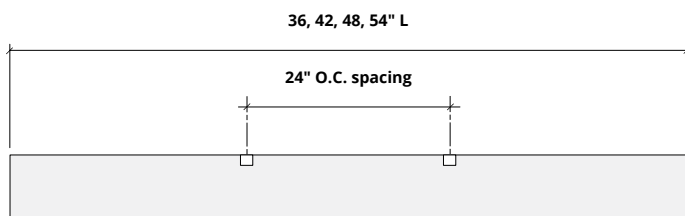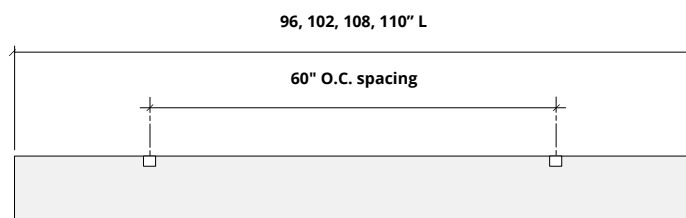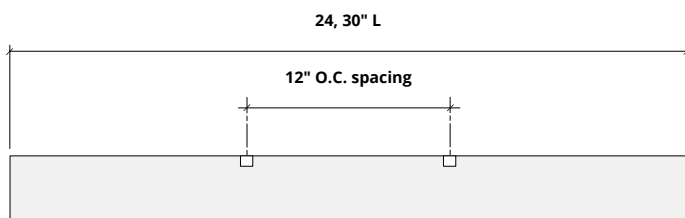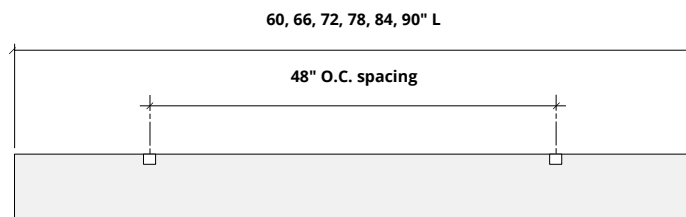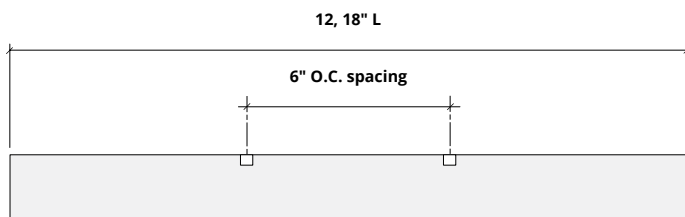


# Mounting Methods


## Cable

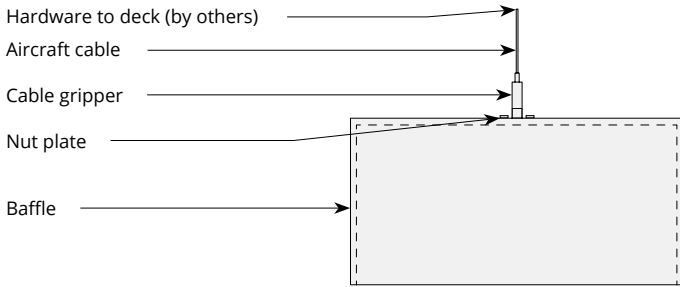


## Cable to deck

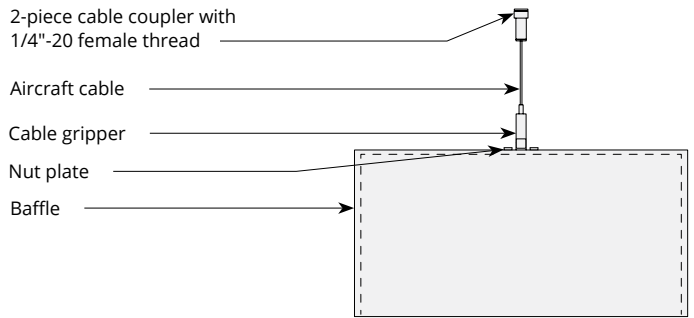


## Cable to T-grid

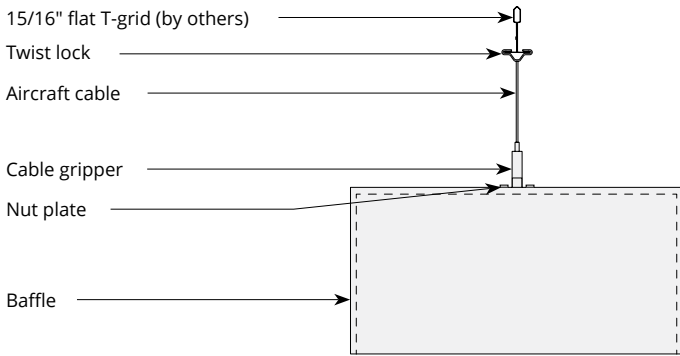


## Cable to Unistrut

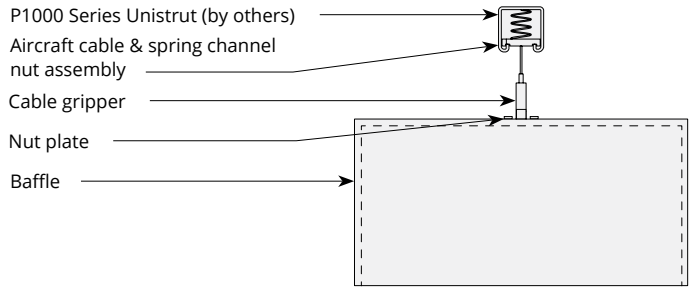

## Swivel cable to deck

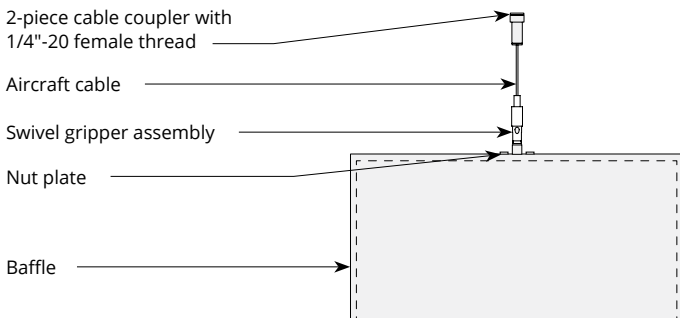


## Threaded rod

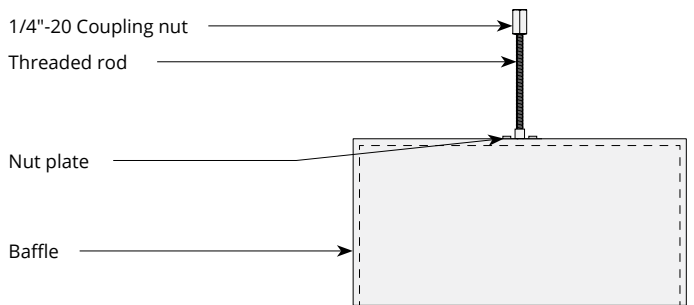


# Mounting Methods cont'd.


## Threaded rod to Unistrut

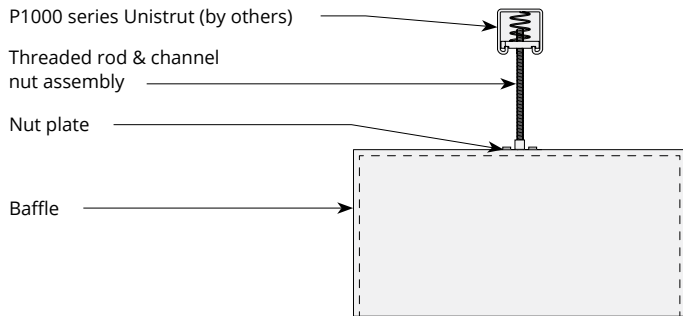

## Direct to Unistrut

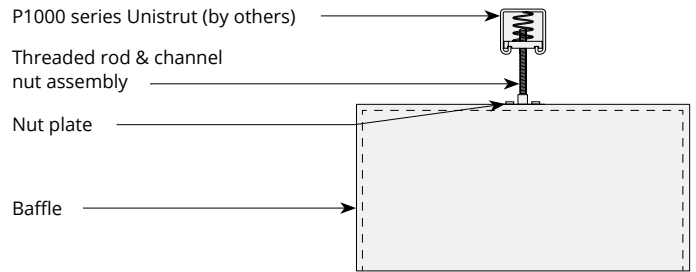

## Twist lock to T-grid

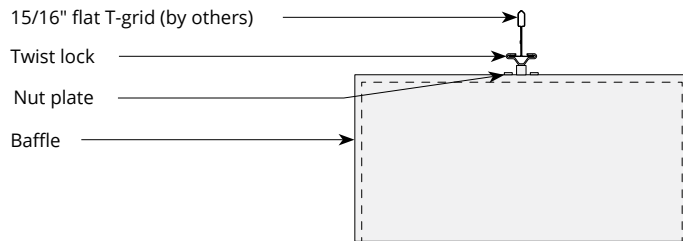

# Acoustic Performance

<b>Test Method</b>	ASTM E795-16
<b>Install Method</b>	J-600
<b>Rating Method</b>	ASTM C423-17
<b>Mounting Method</b>	Sample tested 5 baffles 110" L x 12" D x 3" thickness, hanging 600mm from floor and 152mm from each other
<b>Test Results</b>	NRC 1.65 SAA 1.68



Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
3" Truss Baffle	0.26	0.86	1.25	2.02	2.49	2.49	1.65

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.*