


SoftenerUp, Ridge Wall Panels

Premier Collection

SoftenerUp™ wall panels transform any space with warmth and clarity, effectively absorbing unwanted noise while concealing wall seams and imperfections. The Ridge design features sleek, linear slats with a modern rectilinear aesthetic, available in a variety of colors to suit any style. Designed for effortless installation, SoftenerUp panels offer a versatile, creative solution for enhancing acoustics and elevating the visual appeal of any environment.

Specifications

Surface	Wall	
Material	FilaSorb™ polyester felt	
Thickness	1/2", 12mm (±10%)	
Weight	0.49 lb./ft ² (±10%)	
Standard Sizes	Slat Profiles 2" T x 3" D 4" T x 3" D	Backer Panels 24" W x 24" H 24" W x 48" H 24" W x 96" H 24" W x 108" H

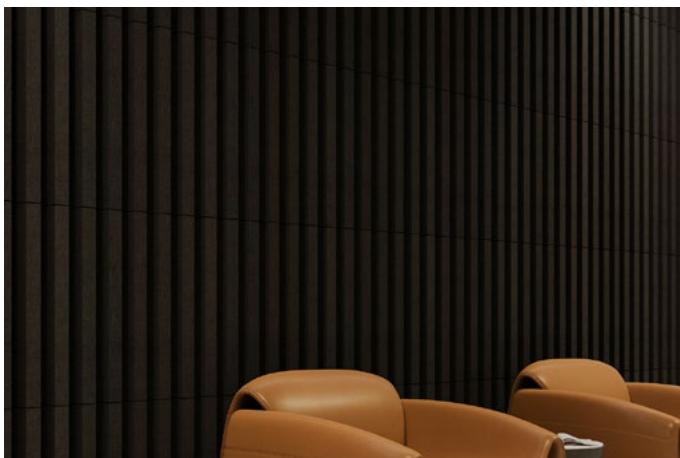

SoftenUp, Ridge Wall Panels in Black

Technical

NRC Rating	NRC 0.95 NRC 0.95, 5mm air gap NRC 1.00, 12mm air gap NRC 1.00, 3/4" air gap
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m ³
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.




Colorways

PREMIER



White
WH12



Almond
AL55



Celery
CE65




Sencha
SE58




Metal
ME03



Flamingo
FL61



Quartz
QU67



Turmeric
TU60




Platinum
PL04




Pearl
PE21




Pistachio
PI25



Thistle
TH28




Stonewash
ST72




Amethyst
AM69



Valentine
VA70




Wheat
WH68



Grey
GR02



Ivory
IV11



Eucalyptus
EU71



Peacock
PE20



Periwinkle
PE23




Lilac
LI13




Peach
PE19




Popcorn
PO26



Slate
SL27




Umber
UM54



Wasabi
WA29




Sea Salt
SE57



Marine
MA15




Berry
BE06




Peppercorn
PE22




Carrot
CA08




Charcoal
CH01




Walnut
WA56




Oregano
OR18




Azure
AZ05




Iris
IR10




Flint
FL64




Shiraz
SH63




Currant
CU59




Piano Black
PI24




Midnight
MI16



Kale
KA12



Denim
DE09



Granite
GR62

Order samples at acoufelt.com/colorways



Call 800.966.8557 with questions or visit acoufelt.com for more product information, downloads, and colorways.


How to Specify

1. Choose Slat Size

2. Choose Backer Panel Size

3. Choose Colorways

Slats are available in two sizes:

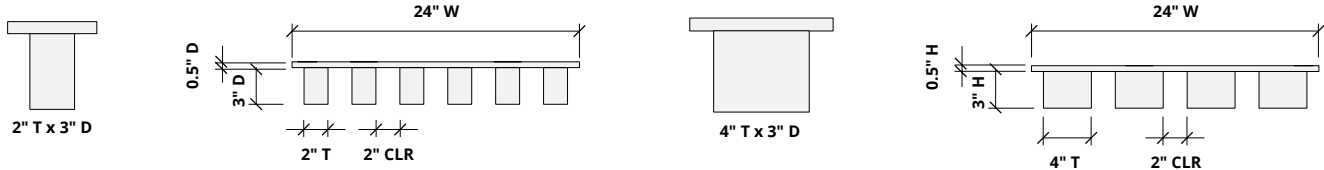


1. Choose Slat Size

2. Choose Backer Panel Size

3. Choose Colorways

Backer panels are available in four heights: 24, 48, 96 and 108" H.

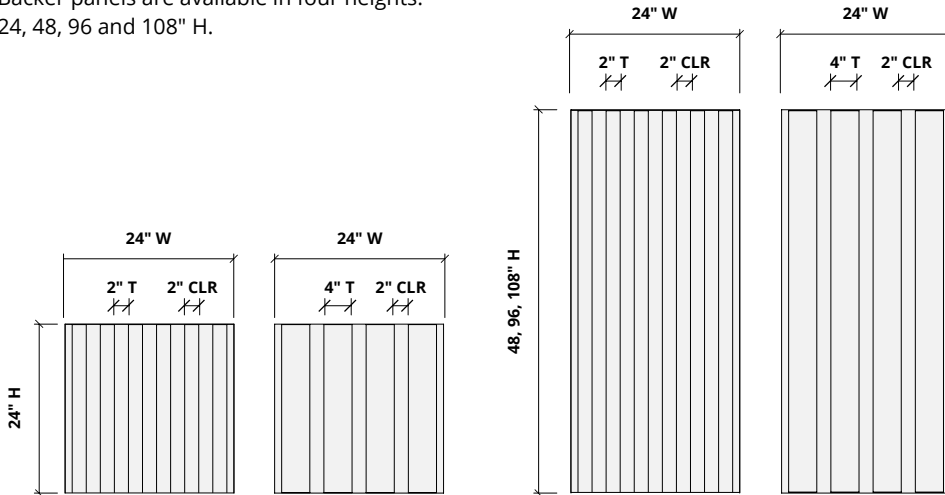


1. Choose Slat Size

2. Choose Backer Panel Size


3. Choose Colorways

Select one colorway for your slats and one colorway for your backer panel. See colorway choices on page 3.

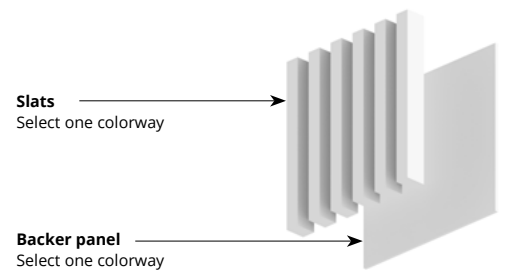


Mounting Methods


Adhesive backing

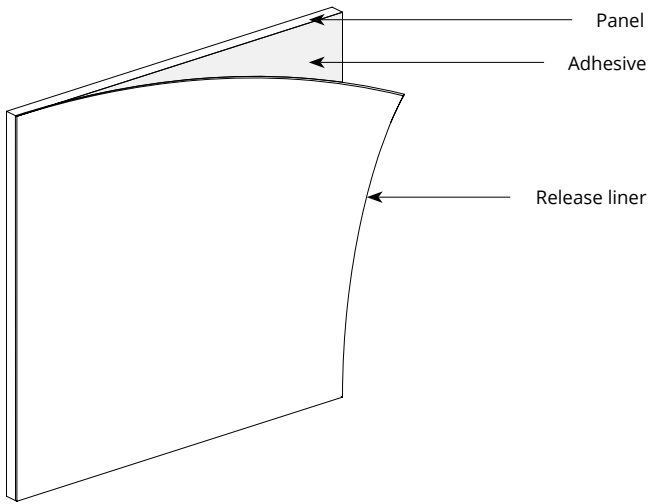

Construction adhesive

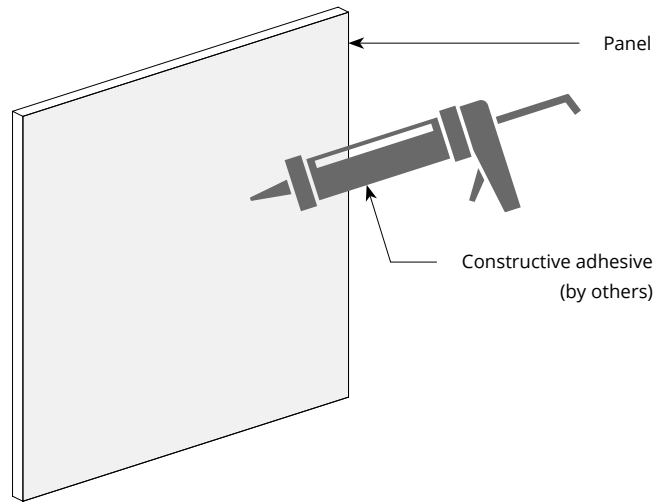


Z-clip wall mount

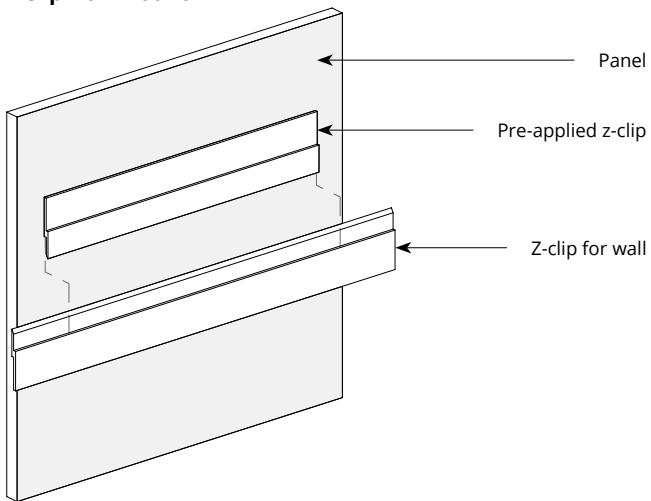

* For wall mount applications only.

Acoustic Performance

Test Method	ASTM E795
Install Method	Type E-400
Rating Method	ASTM C423
Mounting Method	2" T x 3" D slat on 12mm backer
Test Results	<p>NRC 0.95</p> <p>NRC 0.95, 5mm air gap</p> <p>NRC 1.00, 12mm air gap</p> <p>NRC 1.00, 3/4" air gap</p> <p>SAA 0.95, no air gap</p> <p>SAA 0.97, 5mm air gap</p> <p>SAA 1.00, 12mm air gap</p> <p>SAA 1.01, 3/4" air gap</p>

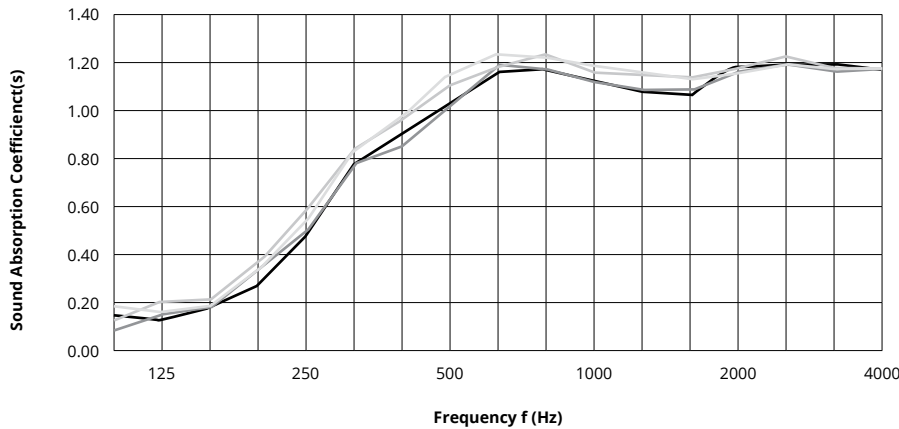

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm	0.17	0.49	1.03	1.12	1.17	1.16	0.95
	12mm, 5mm air gap	0.19	0.53	1.03	1.13	1.17	1.18	0.95
	12mm, 12mm air gap	0.15	0.22	1.10	1.15	1.16	1.16	1.00
	12mm, 3/4" air gap	0.27	0.59	1.13	1.17	1.14	1.16	1.00

What is a Noise Reduction Coefficient (NRC)?


You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

Sound Absorption Results

A24-448

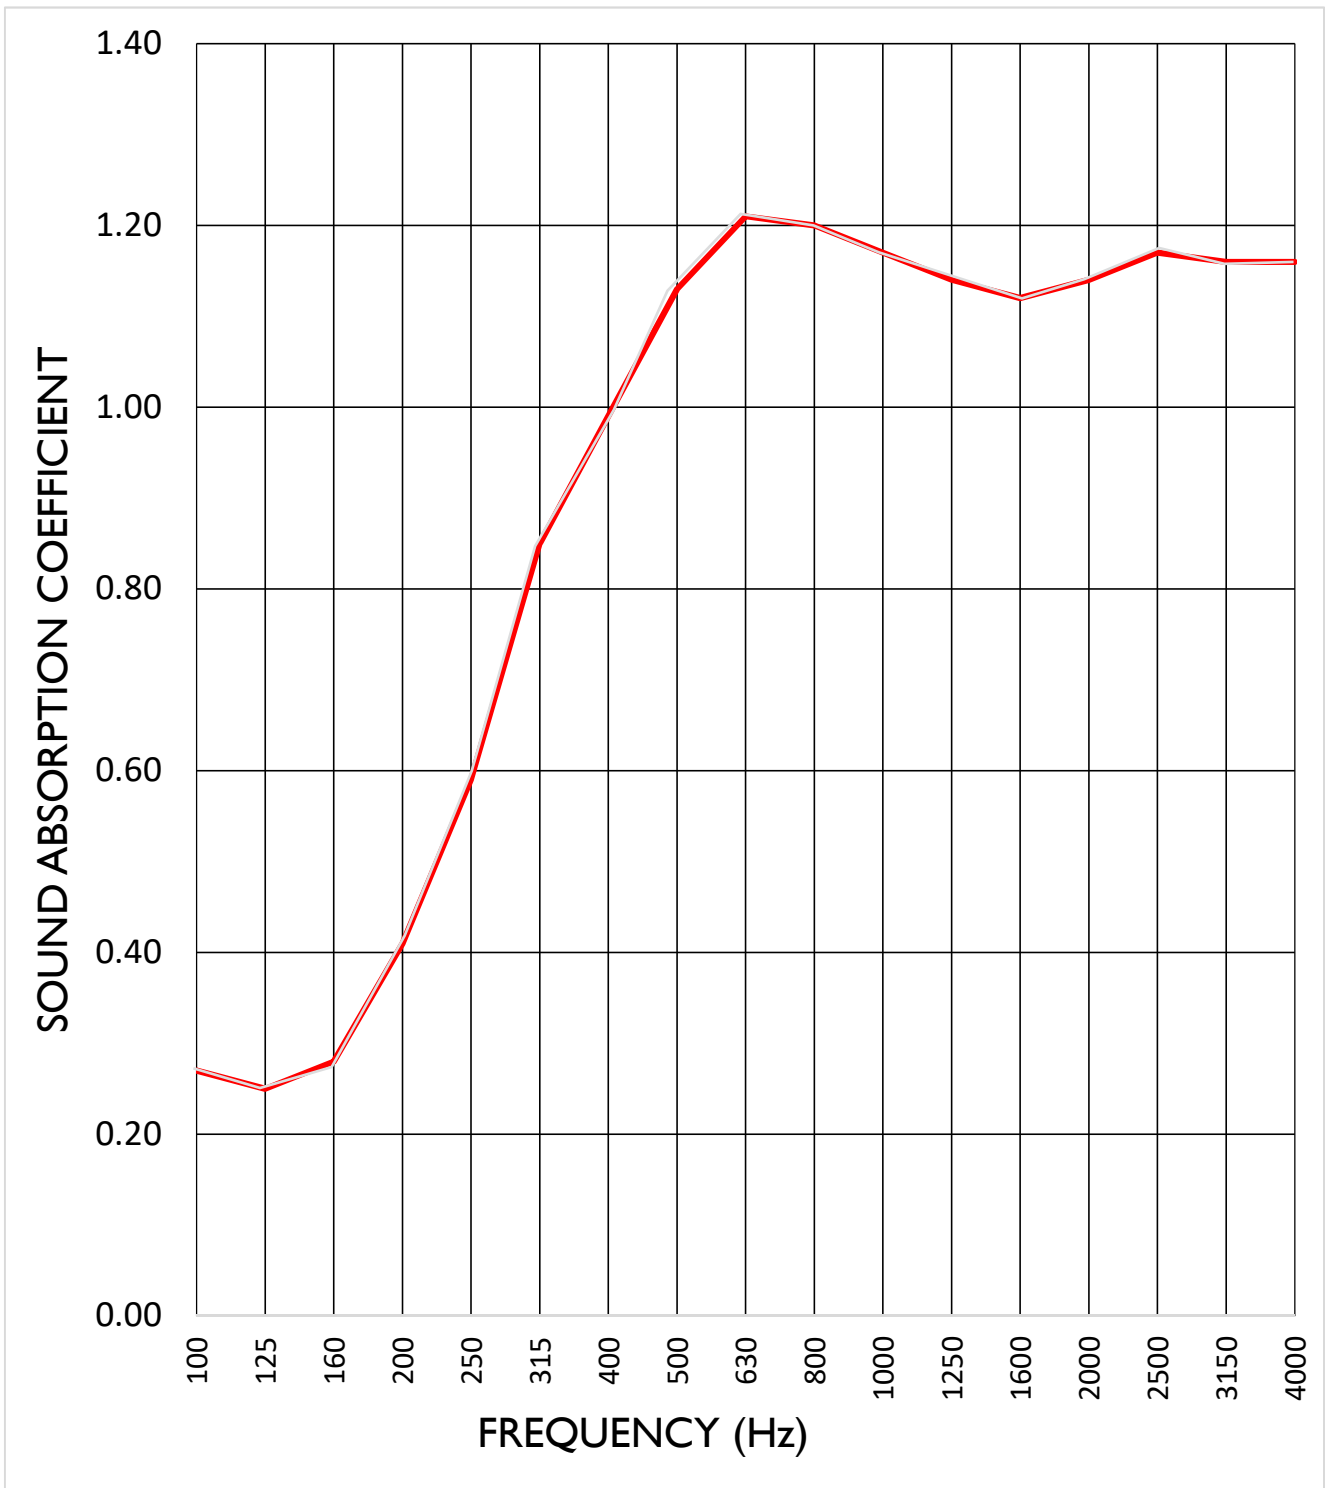

SAA = 1.01 1.01
NRC = 1.00 1

