
# acoufelt

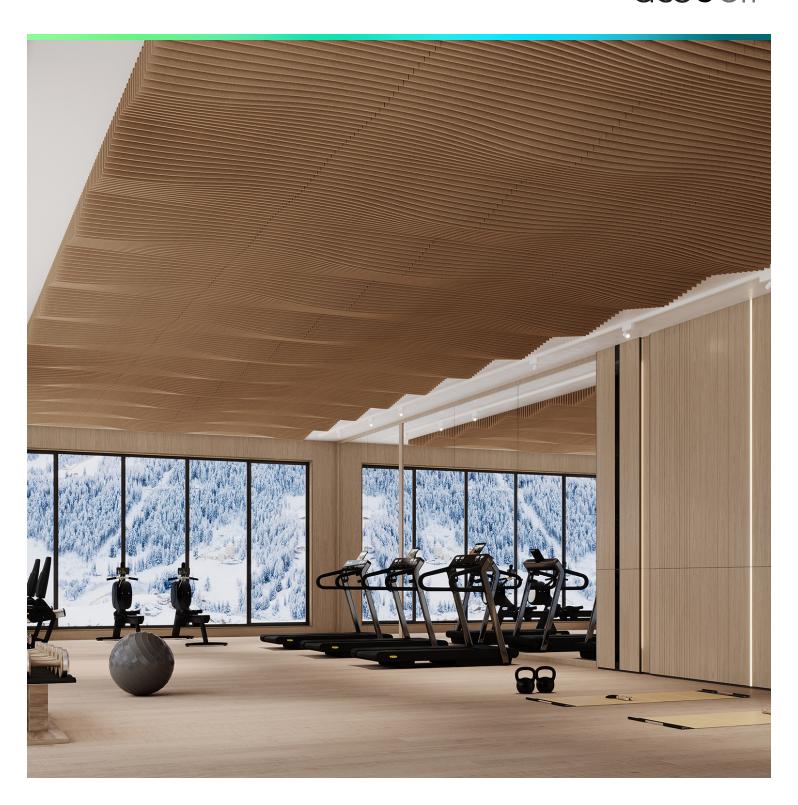

# Rail, Passage Ceiling Frames

**Premier Collection** 

Rail Ceiling Frames offer unmatched flexibility to craft unique, textured ceilings. With an open-tile design and the absence of a backer, Rail seamlessly integrates with essential ceiling components like lighting, sprinklers, and speakers.

The Rail frames system ensures hassle-free installation with its innovative click-in design, eliminating the need for additional hardware. Fully compatible with standard 15/16" T-grid drop ceilings, it provides a versatile and efficient solution for modern ceiling designs.

# **Specifications**

| Surface           | Ceiling                  |                    |
|-------------------|--------------------------|--------------------|
| Material          | FilaSorb™ polyester felt |                    |
| Thickness         | 1/2", 12mm (±10%)        |                    |
| Weight            | 0.49 lb./ft²(±10%)       |                    |
| Standard Sizes    | 24" W x 24" L x 4" H     |                    |
|                   | 24" W x 24" L x 6" H     |                    |
|                   | 24" W x 48" L x 4" H     |                    |
|                   | 24" W x 48" L x 6" H     |                    |
| Compatible T-grid | Туре                     | Layout             |
|                   | 15/16" Flat              | Standard 24" x 24" |



Rail, Passage Ceiling Frames in Umber

## Technical

| NRC Rating     | Pending product testing  |
|----------------|--|
| Fire Test      | ASTM E84, Class A<br>Flame spread index: 15<br>Smoke developed index: 200                      |
| Water Sorption | ASTM C1104-2019 (A Modified)<br>Water sorbed by weight: 0.20%<br>(based on a 12mm thick panel) |
| Colorfastness  | ISO 105-B02, 6-7   |

# Details

| Lead Time       | 3 – 6 weeks                                    |
|-----------------|--|
| Origin          | Manufactured and assembled in the US           |
| <u>Warranty</u> | Product: 20 years*<br>Colorfastness: 20 years* |

<sup>\*</sup> Conditions apply

### **Environmental**

| Recycled Content   | Minimum 60%   |  |
|--------------------|---|--|
| Energy             | Generated using 40% solar energy  |  |
| Indoor Air Quality | VOC less than/equal to 0.5mg/m3   |  |
| Recyclable         | 100%*   |  |
| Certifications     | Declare Certification - LBC Red List Free<br>(third-party verified)<br>SCS Global Indoor Advantage Gold |  |

<sup>\*</sup> PET is recyclable through participating partners.






### **How to Specify**


1. Choose Slat Height

2. Choose Tile Size

3. Choose Colorway

Slats are available in two overall heights:






1. Choose Slat Height

2. Choose Tile Size

3. Choose Colorway

Ties are available in two sizes for use with 4" H and 6" H slats.

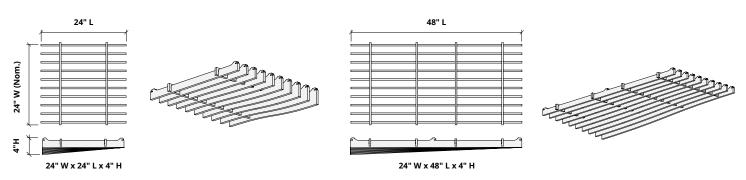

1. Choose Slat Height

2. Choose Tile Size

3. Choose Colorway

Select one colorway for your tile. See colorway choices on the following page.

### Colorways


#### **PREMIER**



Order samples at **acoufelt.com/colorways** 


### **Recommended Layouts**

#### Layout 1




## **Lighting Coordination**


#### 2' x 2', 2' x 4' Grid light



#### **Drop pendant light**



#### **Recessed light**

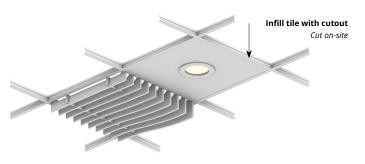

#### Grid mounted light (track, pendant)

