
acoufelt

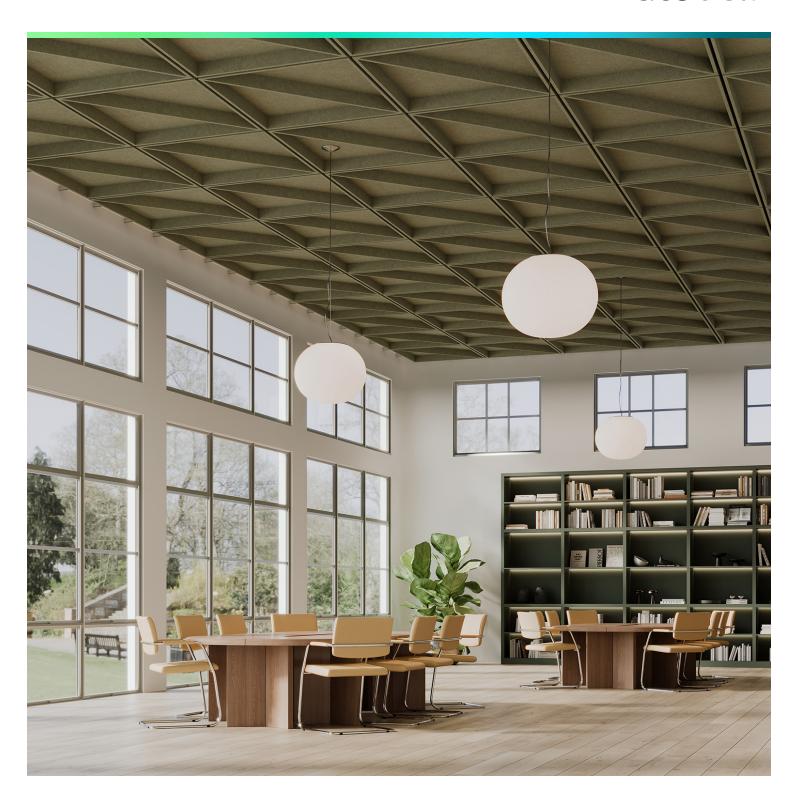

Recess, Cleft Ceiling Frames

Premier Collection

Elevate any space with the rich texture, superior sound management, and refined visual appeal of Cleft ceiling frames. True to its name, Cleft features a distinct design that divides the interior of each cell into two, adding depth and dimension. Its lightweight construction allows for effortless installation, while a range of sizes and Premier Collection finishes provide exceptional design versatility.

Specifications

Surface	Ceiling				
Material	FilaSorb™ polyester felt				
Thickness	1/2", 12mm (±10%)				
Weight	0.49 lb./ft²(±10%)				
Standard Sizes	Thickness 1" T	Height 4, 6, 8" H	Width x Length 24" W x 24" L 48" W x 48" L		
Compatible T-grid	Type 9/16" Flat 15/16" Flat	Layout Standard 24" x 24" Standard 48" x 48"			



Recess, Cleft Ceiling Frame in Pistachio

Technical

NRC Rating	Pending product testing		
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200		
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)		
Colorfastness	ISO 105-B02, 6-7		

Details

Lead Time	3 – 6 weeks		
Origin	Manufactured and assembled in the US		
Warranty	Product: 20 years* Colorfastness: 20 years*		

^{*} Conditions apply

Environmental

Recycled Content	Minimum 60%			
Energy	Generated using 40% solar energy			
Indoor Air Quality	VOC less than/equal to 0.5mg/m3			
Recyclable	100%*			
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold			

^{*} PET is recyclable through participating partners.





Colorways

PREMIER




Order samples at acoufelt.com/colorways

Sizes

Standard Sizes	Thickness	Height	Width x Length	Compatible T-grid	Type	Layout
	1" T	4, 6, 8" H	24" W x 24" L		9/16" Flat	Standard 24" x 24"
			48" W x 48" L		15/16 Flat	Standard 48" x 48"
Thickness	1/2", 12mm	(±10%)				

Plans

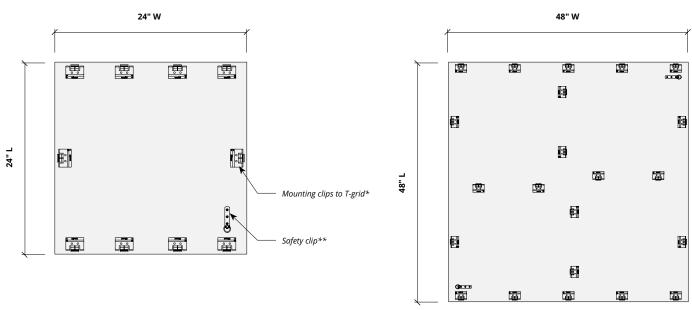


^{*}Clip spacing may differ. Product ships assembled.


Elevations





Perspectives





^{**}Safety cable comes standard on all Recess product lines. See installation guides for additional details.

How to Specify

1. Choose Sizes


2. Choose Colorways

Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway


Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.

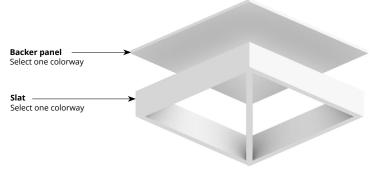

Product ships assembled.

Lighting Coordination

24" x 24", 24" x 48" Grid light



Drop pendant light



Recessed light

