
acoufelt

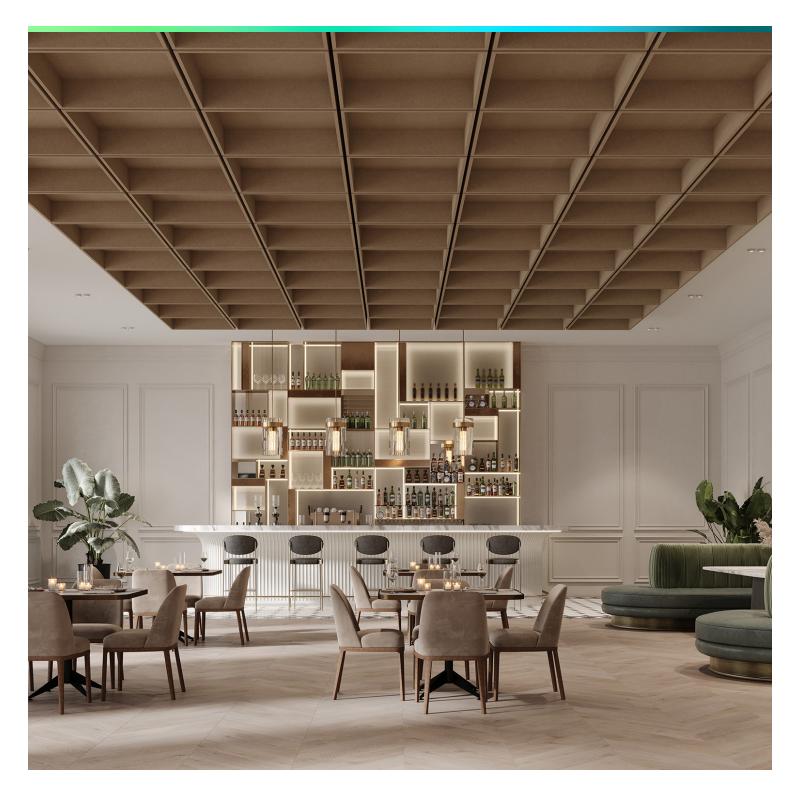

Recess, Waffle Ceiling Frames

Premier Collection

Recess, Waffle ceiling frames are designed to use less material, making them lightweight and easy to install in any location. With a variety of product sizes and Premier Collection colors available, Waffle provides exceptional creative freedom, allowing you to add texture, manage sound, and enhance the visual appeal of any space.

Specifications

| Surface | Ceiling | | | | | |
|-------------------|--|--|--|--|--|--|
| Material | FilaSorb™ polyester felt | | | | | |
| Thickness | 1/2", 12mm (±10%) | | | | | |
| Weight | 0.49 lb./ft²(±10%) | | | | | |
| Standard Sizes | Thickness 1" T | Height 4, 6, 8" H | Width x Length 24" W x 24" L 48" W x 48" L | | | |
| Compatible T-grid | Type 9/16" Flat 15/16" Flat | Layout Standard 24" x 24" Standard 48" x 48" | | | | |



Recess, Waffle Ceiling Frame in Umber

Technical

| NRC Rating | Pending product testing | | |
|----------------|--|--|--|
| Fire Test | ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200 | | |
| Water Sorption | ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel) | | |
| Colorfastness | ISO 105-B02, 6-7 | | |

Details

| Lead Time | 3 – 6 weeks | | | |
|-----------------|--|--|--|--|
| Origin | Manufactured and assembled in the US | | | |
| <u>Warranty</u> | Product: 20 years* Colorfastness: 20 years* | | | |

^{*} Conditions apply

Environmental

| Recycled Content | Minimum 60% | | | |
|--------------------|---|--|--|--|
| Energy | Generated using 40% solar energy | | | |
| Indoor Air Quality | VOC less than/equal to 0.5mg/m3 | | | |
| Recyclable | 100%* | | | |
| Certifications | Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold | | | |

 $[\]hbox{* \it PET is recyclable through participating partners.}$





Colorways

PREMIER




Order samples at acoufelt.com/colorways

Sizes

| Standard Sizes | Thickness | Height | Width x Length | Compatible T-grid | Type | Layout |
|----------------|------------|------------|----------------|-------------------|-------------|--------------------|
| | 1" T | 4, 6, 8" H | 24" W x 24" L | | 9/16" Flat | Standard 24" x 24" |
| | | | 48" W x 48" L | | 15/16" Flat | Standard 48" x 48" |
| Thickness | 1/2", 12mm | (±10%) | | | | |

Plans

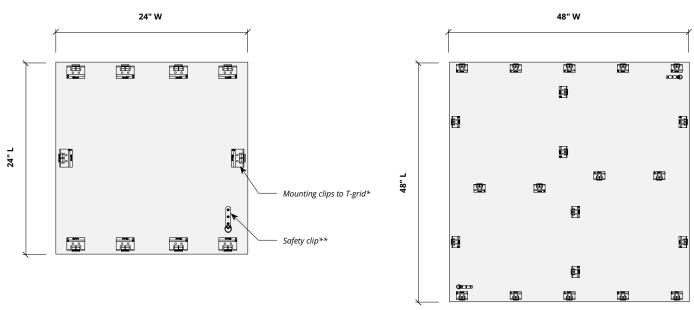


^{*}Clip spacing may differ. Product ships assembled.


Elevations





Perspectives





^{**}Safety cable comes standard on all Recess product lines. See installation guides for additional details.

How to Specify

1. Choose Sizes


2. Choose Colorways

Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway


Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.

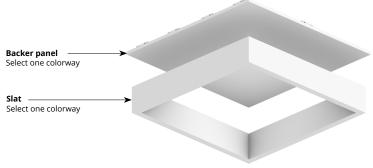


Product ships assembled.

Lighting Coordination


24" x 24", 24" x 48" Grid light



Drop pendant light



Recessed light

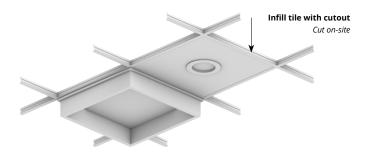

Grid mounted light (track, pendant)

