
acoufelt

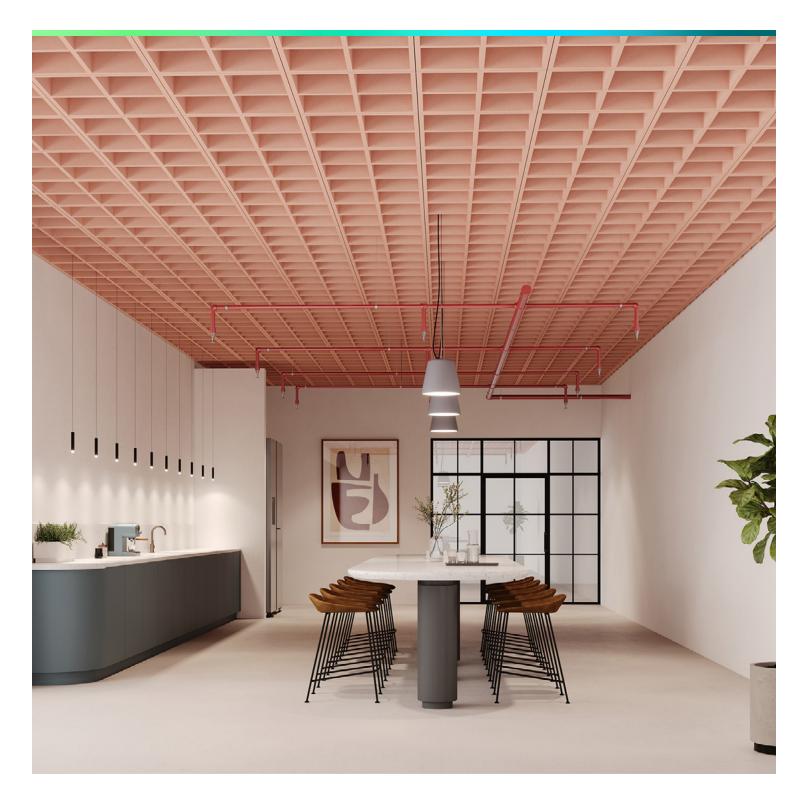

Woven, Windowpane Ceiling Frames

Premier Collection

The uniform Windowpane pattern resembles the traditionally placed panes on a window. This Woven design creates a dynamic balance of openness and acoustic performance, making it ideal for high-traffic areas. Thoughtfully engineered, the Windowpane pattern integrates with ceiling elements such as sprinklers, speakers, and lighting, enhancing both form and function.

Specifications

Surface	Ceiling	
Material	FilaSorb [™] polyes	ster felt
Thickness	1/2", 12mm (±1	0%)
Weight	0.49 lb./ft²(±109	%)
Standard Sizes	4" H x 24" W x 24" L 6" H x 24" W x 24" L	
Compatible T-grid	Type 15/16" Flat 9/16" Flat	Layout Standard 24" x 24" Standard 24" x 24"



Woven, Windowpane Ceiling Frames in Flamingo

Technical

NRC Rating	Pending product testing
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

^{*} Conditions apply

Environmental

Recycled Content	Minimum 60%	
Energy	Generated using 40% solar energy	
Indoor Air Quality	VOC less than/equal to 0.5mg/m3	
Recyclable	100%*	
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold	

 $[\]hbox{* \it PET is recyclable through participating partners.}$





Colorways

PREMIER




Order samples at ${\color{red} {\bf acoufelt.com/colorways}}$


How to Specify

1. Choose Slat Height

2. Choose Colorways

Slats are available in two heights:

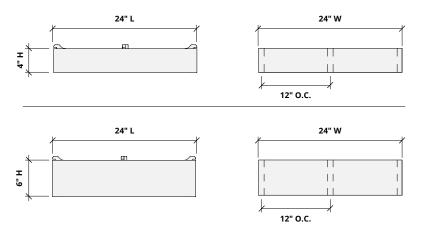




1. Choose Slat Height


2. Choose Colorways

See colorway choices on page 3.




Lighting Coordination

24" x 24" Grid light



Drop pendant light

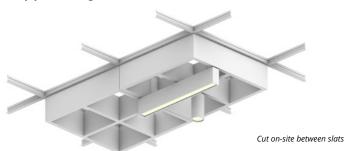

Recessed light

