



Ceiling Clouds Installation Guide

Premier, WoodGrain

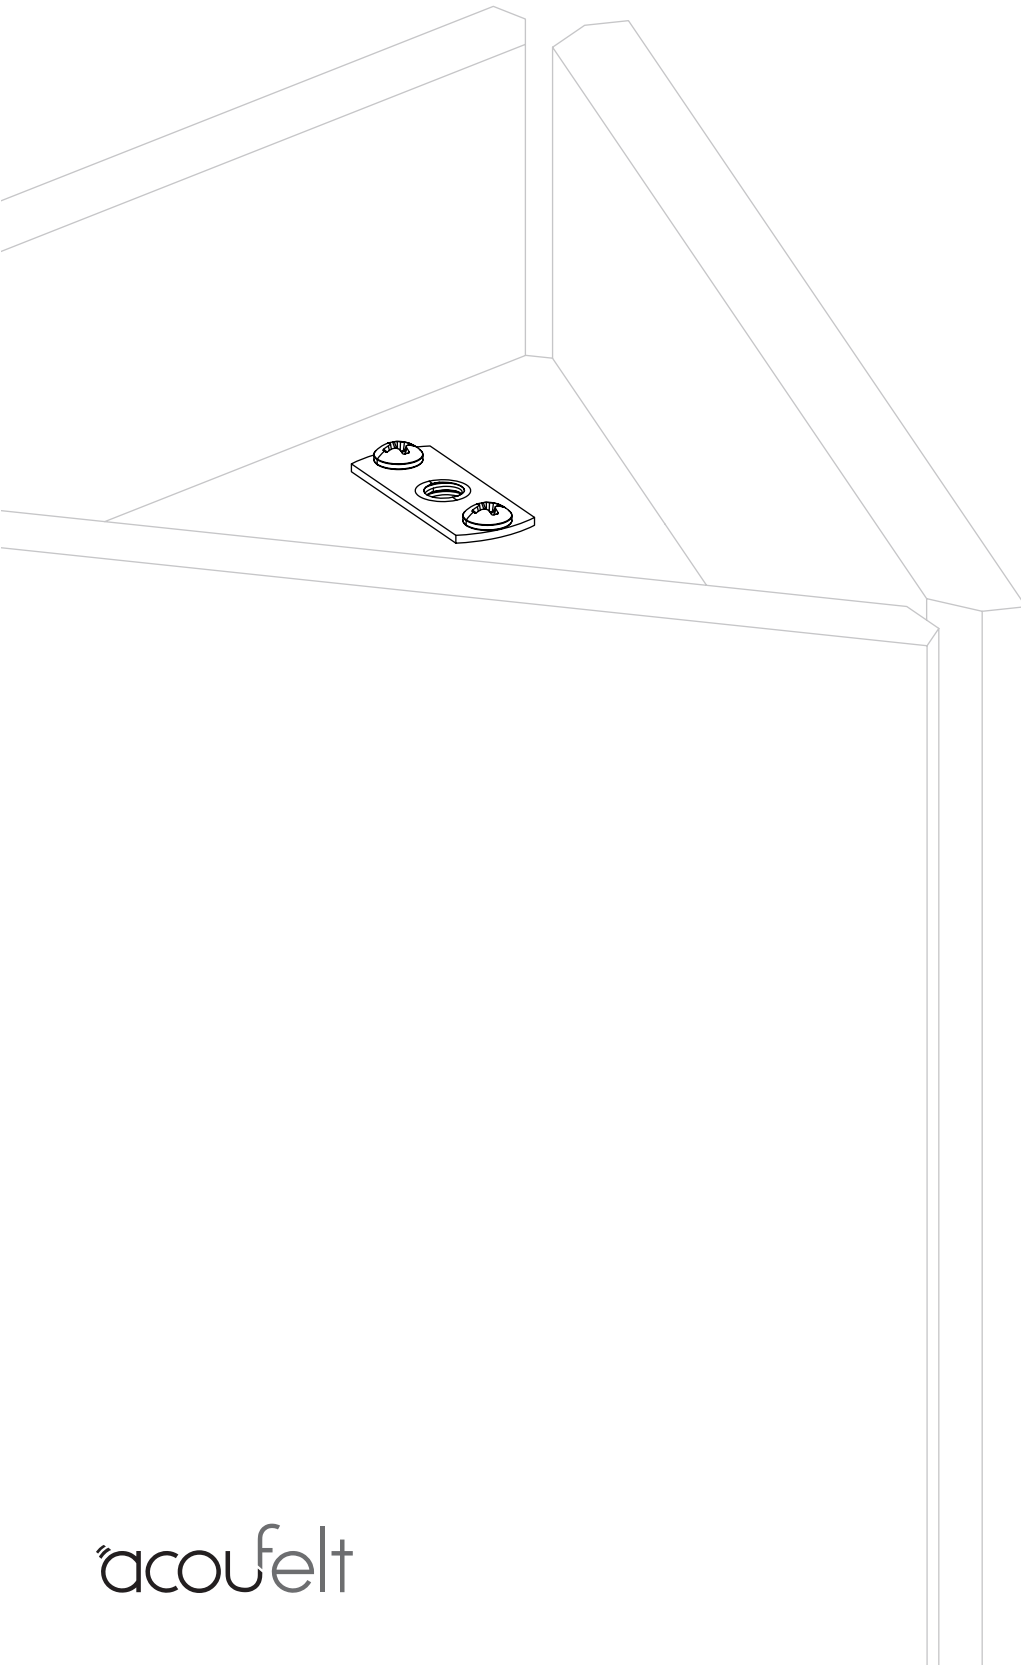


Nut Plate Connection


FOR THESE PRODUCTS:




☐ Blox,
Angled




☐ Blox,
Deep




☐ Blox,
Shallow




☐ Crest



☐ Pan




☐ Pendant



☐ Swing

FOR THESE MOUNTING METHODS:

- ☐ Cable to Deck
- ☐ Cable to T-grid
- ☐ Cable to Strut Channel
- ☐ Cable



- ☐ Swivel Cable to Deck



- ☐ Threaded Rod
- ☐ Threaded Rod to Strut Channel



Table of Contents

Introduction.....	03
Hardware and Tools	04
Nut Plate Installation	05
Ceiling Mounting Methods	
1. Cable to Deck	06
2. Cable to T-grid	09
3. Cable to Strut Channel	12
4. Cable Only	15
5. Swivel Cable to Deck	17
6. Threaded Rod Only	20
7. Threaded Rod to Strut Channel	22



For questions or additional product information,
visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Cloud Nut Plate Instructions | June 2025

Introduction

Acoufelt's ceiling clouds offer both acoustic performance and aesthetic appeal, enhancing a wide variety of spaces. This guide provides step-by-step instructions for installing clouds using a nut plate system, ensuring a secure and seamless installation no matter the setting. Carefully follow these guidelines to achieve optimal results while maintaining the integrity of the design and structure.

Important Notes

When installing Acoufelt clouds, consult with other relevant trades to ensure that the hanging clouds will not interfere with the performance of any other systems within the installation space.

Verify that all Acoufelt clouds are installed in the correct orientation as indicated in the Acoufelt print and installation plan to maintain consistency and avoid variations that could impact the overall appearance of the finished installation.

Carefully evaluate structural conditions, project load, and load requirements to determine the appropriate anchoring solutions needed for a secure and stable installation.

Assembly notes and warnings:

Read and follow all instructions carefully before beginning the installation and retain these instructions for future reference. Failure to adhere to these guidelines may result in improper installation, which could compromise the safety, functionality, or aesthetic quality of the finished project. Ensure all components are properly assembled and secured according to the installation plan and follow workplace safety standards while using appropriate personal protective equipment during installation.

Disclaimer

Acoufelt strives to fulfill the needs of their customers by producing the highest quality felt products; however, due to the fine, fibrous, and textural nature of the product, slight visual imperfections may be seen when viewing the product from less than 3 to 5 feet. These slight visual imperfections are within a normal manufacturing industry tolerance and do not affect the product's performance or durability.

Consult local building codes and/or a fire engineer to determine the proper locations for any clouds in relation to any fire suppression system located with the installation space.

Installation Tolerances

Variation of cloud dimensions $\pm [1/16" (1.6mm)]$
in 110" (2800mm), noncumulative

Variation of cloud thickness $\pm [10\%]$ in 12mm
thickness, noncumulative

Setup and Unpacking

Product shall be stored in a dry interior location and shall remain in boxes prior to installation to avoid damage. The boxes shall be stored in crated orientation and not stacked with any added weight. Proper care should be taken when handling to avoid damage or soiling.


Product containers should only be opened in a clean area, free of construction dust. Wearing clean, cloth gloves, carefully remove the components from the packing materials. Verify all items listed on the packing list are included.

Inspect products after opening. If products appear to be damaged or defective on visual inspection, do not install and contact your Acoufelt representative immediately.

Using the Instructions

Begin by locating your ceiling mounting method in the table of contents (on the previous page), then refer to its corresponding page in the document.

Each mounting method includes a list of required tools (provided by the installer) and parts. Each part will be labeled with a corresponding letter, which will serve as a guide through the mounting method steps and drawings (see example below).

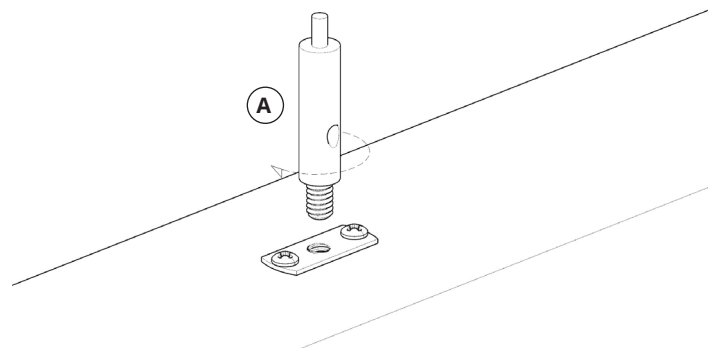


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025

Hardware



#6 x 1/2" Screws




3/64" Aircraft cable




Cable coupler




Cable gripper



Channel nut




Cloud



Flat washer



Hex nut



Nut plate




Swivel gripper



Threaded rod



Threaded stud




Twist lock


Tools




Construction marker



Drill



Hex head wrench




Laser level/level



Measuring tape



Safety glasses



Wire rope cutter



For questions or additional product information,
visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025

Nut Plate Installation

Nut plates come pre-installed in Acoufelt clouds; however, if adjustments are needed, you can easily remove the nut plate and reposition it by following these steps:

PARTS LIST*

A. #6 x 1/2" Screws



B. Cloud

C. Nut plate

**Quantities will vary*

TOOLS

Drill

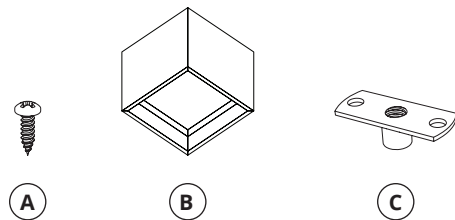

Step 1: Position or reposition the nut plate

If the nut plate is already installed, the screws will already be attached to the cloud. If repositioning, center the nut plate on the cloud and fasten the screws. The nut plate can face either direction on the cloud.

Step 2: Secure the nut plate

Attach the nut plate to the cloud using the provided #6 x 1/2" screws. Fasten the screws firmly until the nut plate is securely in place.



1 Cable to Deck


PARTS LIST*

A. 3/64" Aircraft cable

B. Cable coupler

C. Cable gripper

**Quantities will vary*

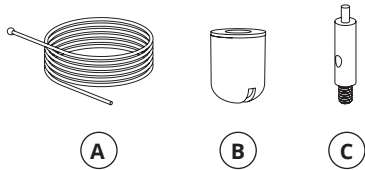

TOOLS

Measuring tape


Construction marker

Drill

Laser level/level


Safety glasses

Wire rope cutter

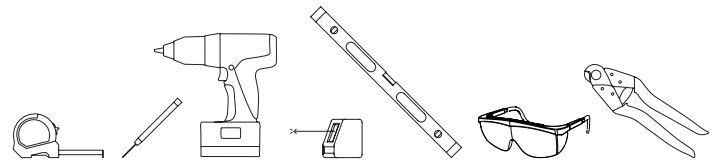


Step 1: Attach the cable gripper

Twist the cable gripper into the threads of the nut plate to securely connect it to the cloud.

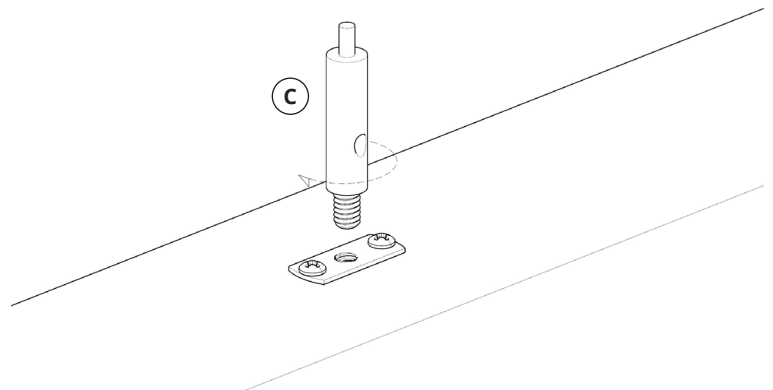

Step 2: Mark connection points

Use a measuring tape or laser level and a construction marker to measure and mark the desired deck connection location. If project-specific installation drawings have been provided, reference the connection layout to ensure proper placement/ mounting locations.

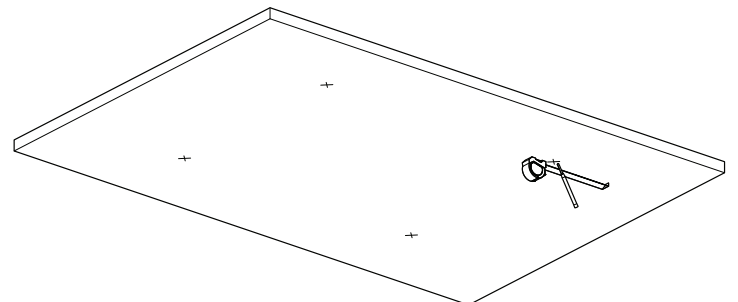


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025

Step 3: Prepare the cable coupler


Remove the screw nut from the cable coupler. Keep the coupler barrel accessible. Next, drill a hole into the deck, and secure the screw nut with an appropriate anchor or screw.

NOTE: Consult a structural engineer to determine the appropriate anchors or screws for specified mounting surface/substrate.

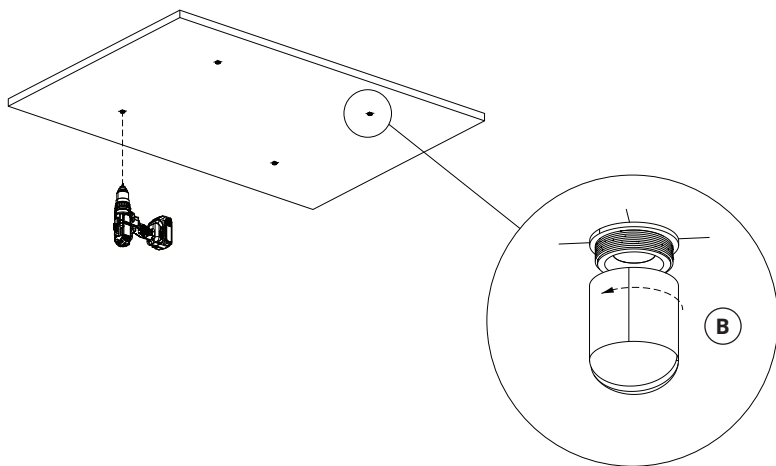


Step 4: Securing aircraft cable

Insert the aircraft cable into the bottom of the coupler barrel and ensure the aircraft cable feeds through fully so the ball stop rests securely inside the cable coupler.

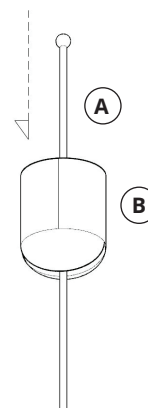

Step 5: Thread coupler barrel

Thread the coupler barrel back onto the screw nut, ensuring it is properly and securely attached.

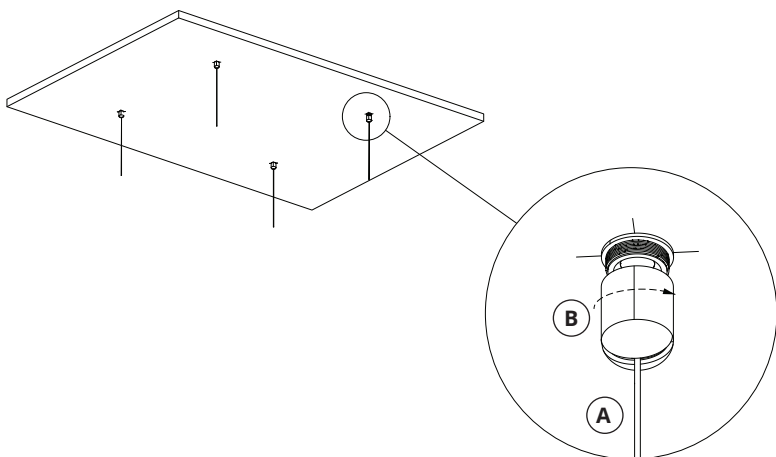


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.


Cloud Nut Plate Instructions | June 2025

Step 6: Insert the aircraft cable into the cable gripper

Insert the aircraft cable into the cable gripper. Ensure the aircraft cable is correctly inserted by verifying that its end exits through the hole on the side of the cable gripper. This step should occur after the aircraft cable has been connected to the ceiling.

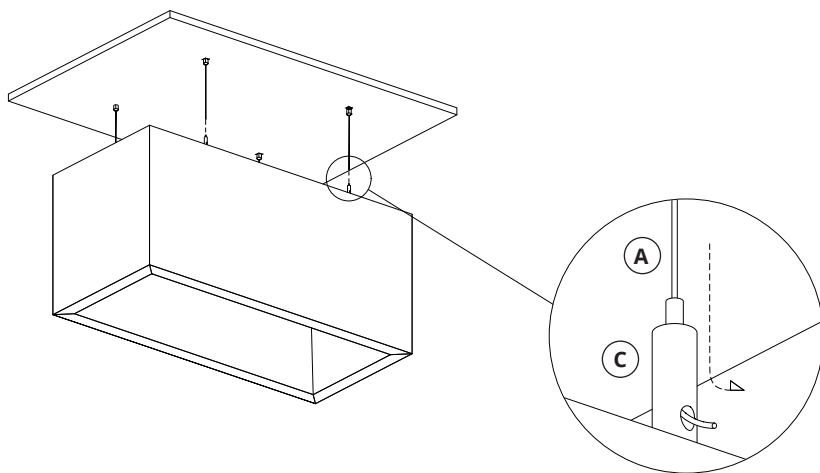**Step 7: Adjust aircraft cable length**

Use the plunger on the cable gripper to adjust the length of the aircraft cable, setting the clouds to the desired height. Utilize a laser level or level to ensure all clouds are level and meet the specified design height. Once the clouds are properly positioned and level, trim the excess aircraft cable.

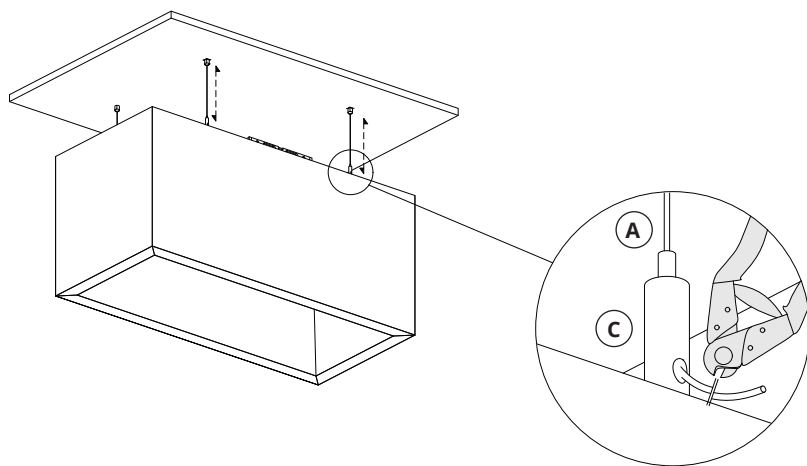

2 Cable to T-grid

Our cable to T-grid mounting method is only compatible with 15/16" flat T-grids.

PARTS LIST*

A. 3/64" Aircraft cable

B. Cable gripper

C. Twist lock

**Quantities will vary*



TOOLS

Measuring tape

Construction marker


Laser level/level

Wire rope cutter

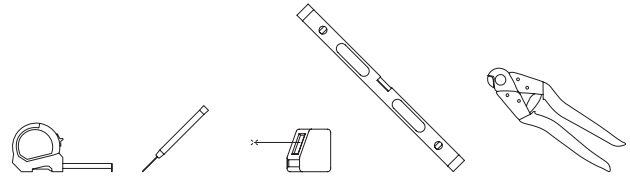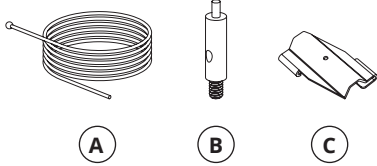


Step 1: Attach the cable gripper

Twist the cable gripper into the threads of the nut plate to securely connect it to the cloud.

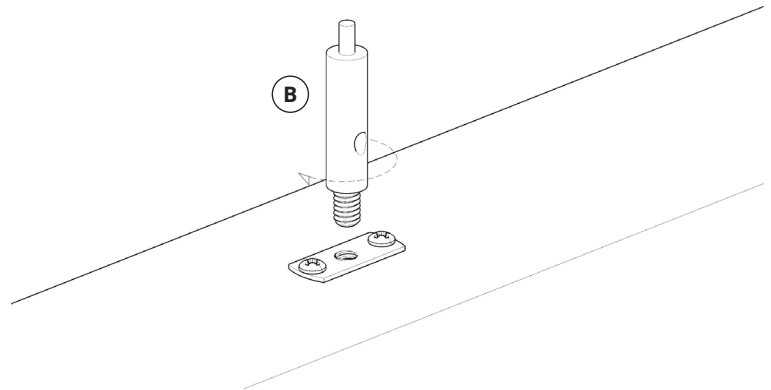

Step 2: Mark connection points

Use a measuring tape or laser level and a construction marker to measure and mark the desired T-grid connection location. If project-specific installation drawings have been provided, reference the connection layout to ensure proper placement/ mounting locations.

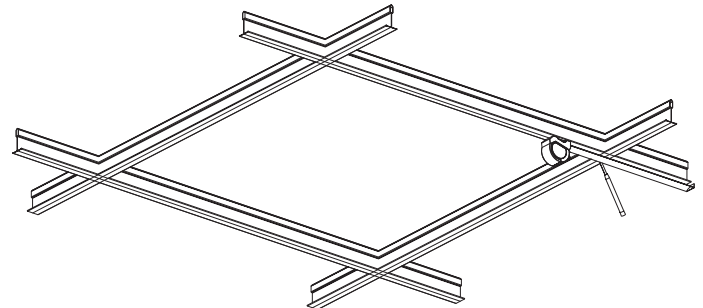


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025


Step 3: Thread the aircraft cable

Thread the aircraft cable through the circular opening on the twist lock until the ball at the end of the aircraft cable catches and can't move any further. Ensure the orientation of the twist lock matches the image on the right.

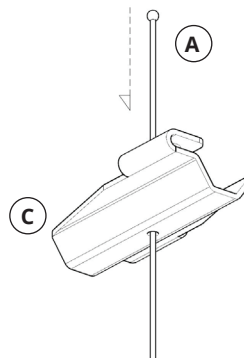


Step 4: Attach the twist lock clip

Measure attachment locations on the T-grid based on provided drawings. Attach the twist lock clip to the T-grid by turning it until it snaps in place. Verify the clip is fully secure on both sides of the T-grid.

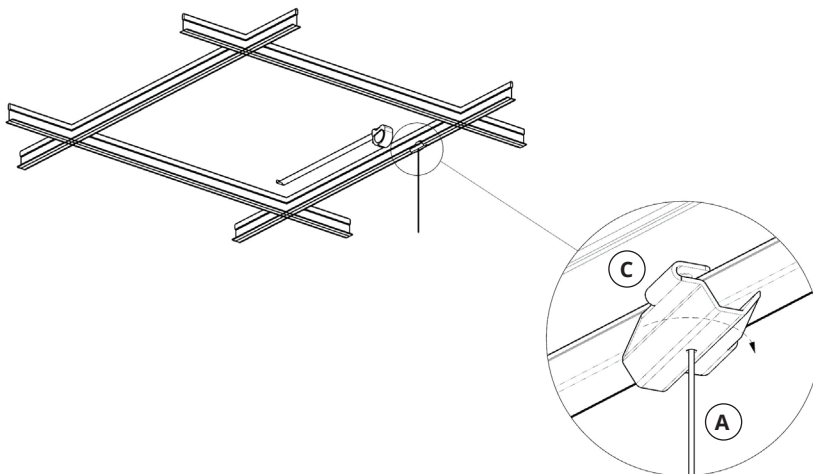

Step 5: Insert the aircraft cable into the cable gripper


After the aircraft cable has been connected to the ceiling, insert the aircraft cable. Ensure the aircraft cable is correctly inserted by verifying that its end exits through the hole on the side of the cable gripper.

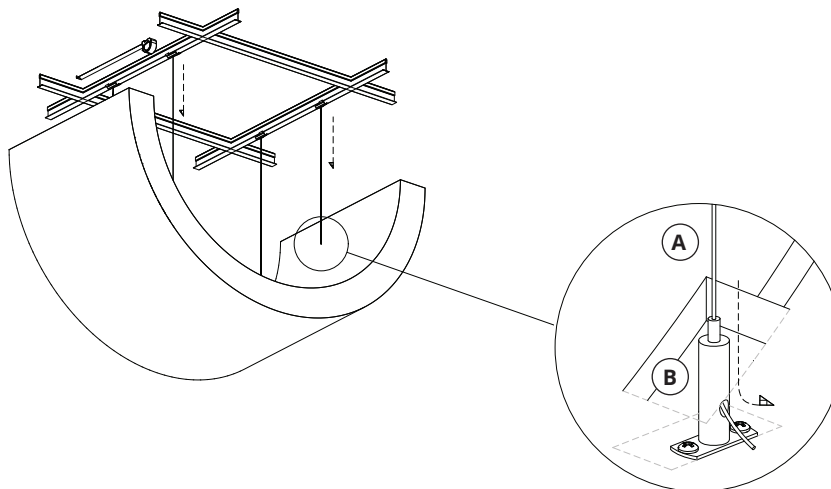

For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Step 6: Adjust aircraft cable length

Use the plunger on the cable gripper to adjust the length of the aircraft cable, setting the clouds to the desired height. Utilize a laser level or level to ensure all clouds are level and meet the specified design height. Once the clouds are properly positioned and level, trim the excess aircraft cable.

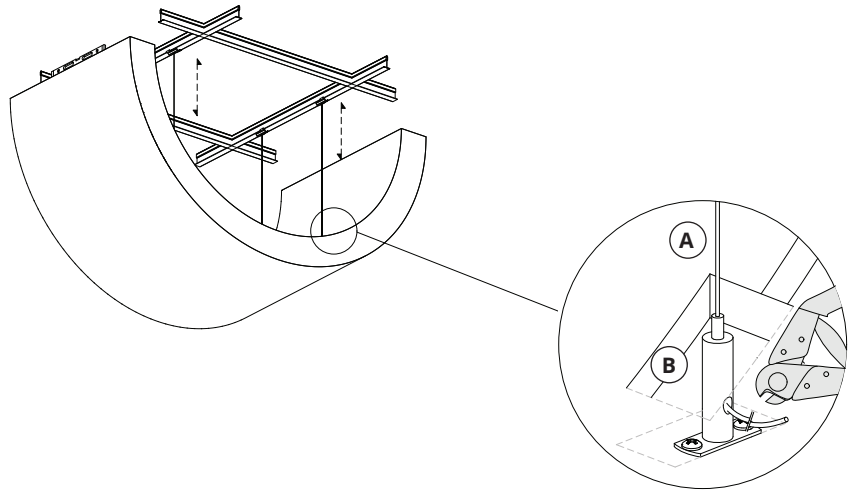

3 Cable to Strut Channel

Our cable to T-grid mounting method is compatible with P1000 and P3300 Unistrut Profiles.

PARTS LIST*

A. 3/64" Aircraft cable

B. Cable coupler

C. Cable gripper

D. Channel nut

E. Flat washer

F. Threaded stud

**Quantities will vary*



TOOLS

Measuring tape

Construction marker


Laser level/level

Wire rope cutter

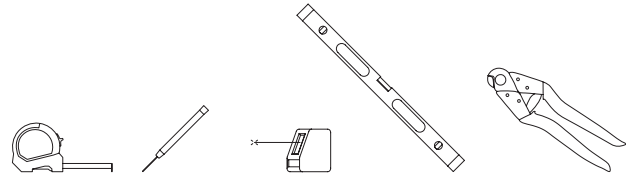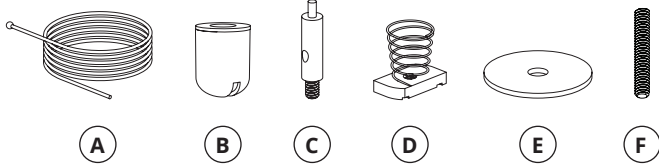


Step 1: Attach the cable gripper

Twist the cable gripper into the threads of the nut plate to securely connect it to the cloud.

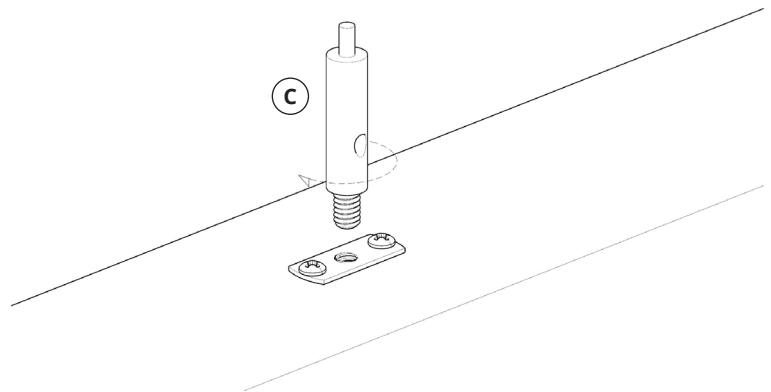

Step 2: Strut channel layout and installation

Layout the strut channels according to the installation drawing provided by Acoufelt or based on the desired spacing. If an installation drawing is available, start at the designated point in the drawing. Use a measuring tape to ensure accurate spacing between strut channels. Follow the strut channel manufacturer's recommendations and instructions for proper installation.

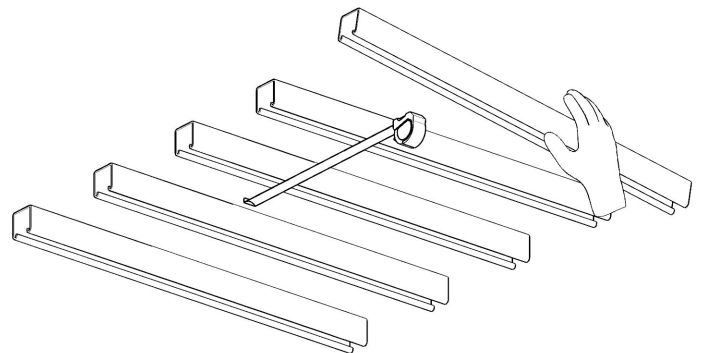


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025


Step 3: Hardware layout and installation

Measure from the center of the specified starting point and mark the hardware connection locations on the strut channel. Insert the threaded stud into channel nuts and then insert the channel nut into the strut channel at the marked locations. Make sure the grooves in the channel nut sit on top of the rails of the strut channel.

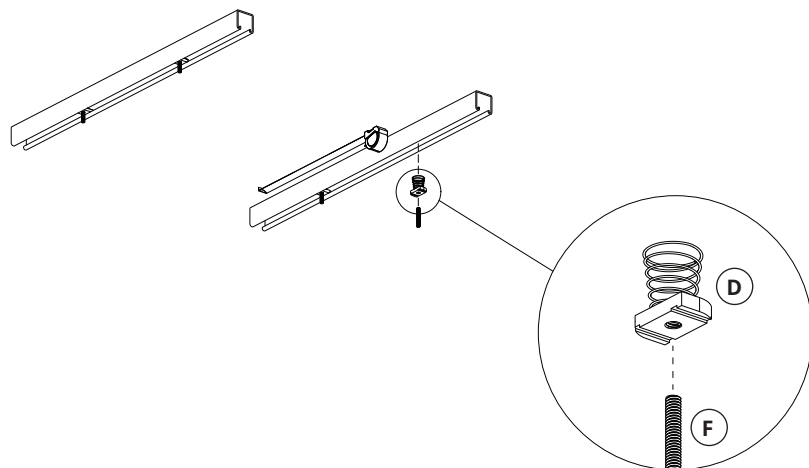


Step 4: Attach washer and screw nut

Remove the screw nut from the cable coupler and keep it accessible. Place the flat washer onto threaded stud and fasten the washer tightly with the screw nut. Confirm the washer and screw nut are securely in place on the threaded stud.

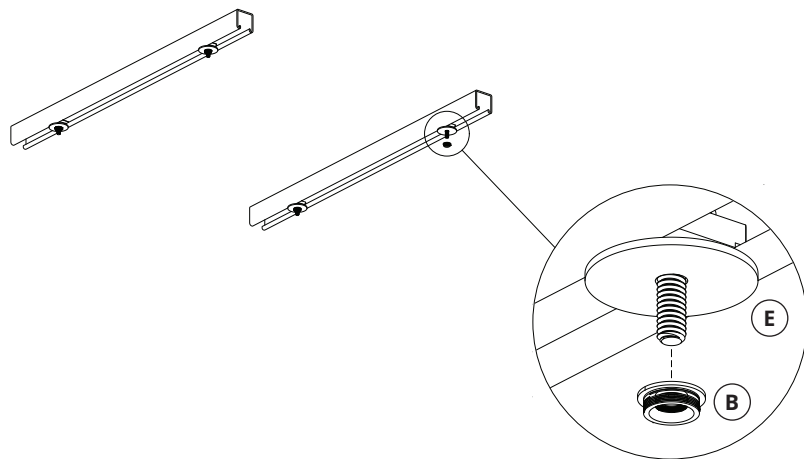


Step 5: Thread the aircraft cable

Thread the aircraft cable through the opening on the coupler barrel until the ball at the end of the aircraft cable catches and can't move any further.

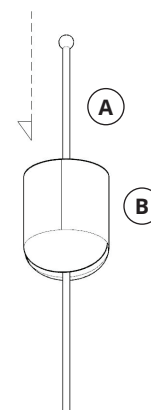


Step 6: Attach coupler barrel to strut channel

Twist the coupler barrel clockwise onto the threaded stud until it is securely attached to the strut channel.

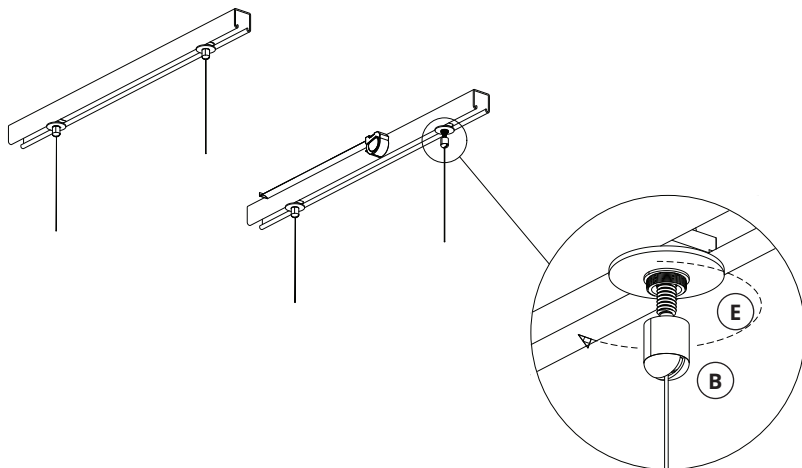


Step 7: Insert the aircraft cable into the cable gripper

Insert the aircraft cable into the cable gripper. Ensure the aircraft cable is correctly inserted by verifying that its end exits through the hole on the side of the cable gripper. This step should occur after the aircraft cable has been connected to the ceiling.

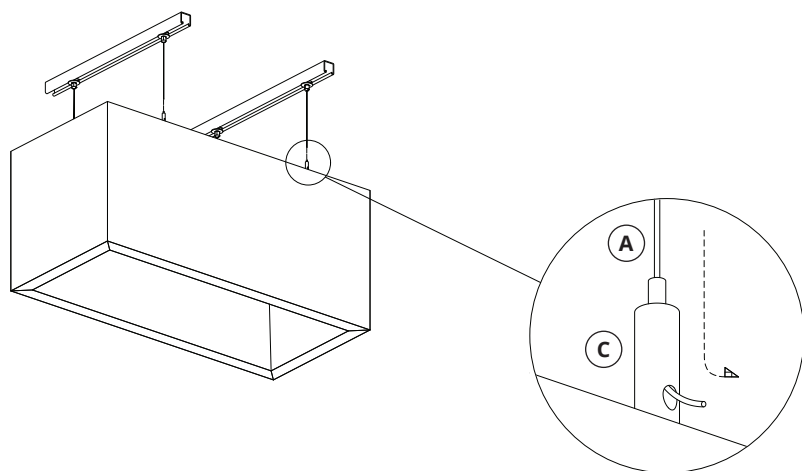

Step 8: Adjust aircraft cable length

Use the plunger on the cable gripper to adjust the length of the aircraft cable, setting the clouds to the desired height. Use a laser level or level to ensure all clouds are level and meet the specified design height. Once the clouds are properly positioned and level, trim the excess aircraft cable.

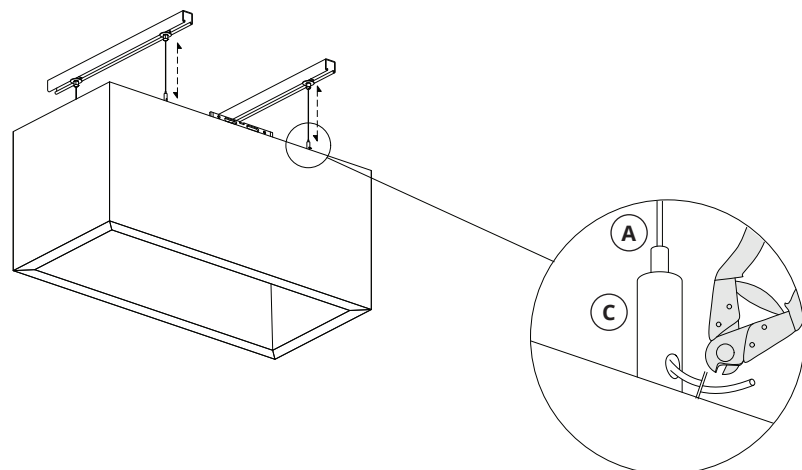


4 Cable Only

PARTS LIST*

A. 3/64" Aircraft cable

B. Cable gripper

*Quantities will vary




TOOLS

Measuring tape

Construction marker


Laser level/level

Wire rope cutter

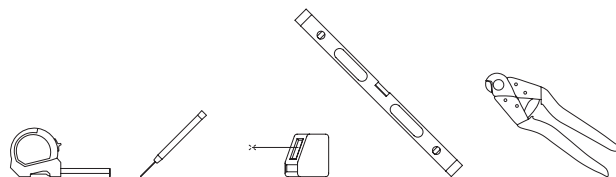


Step 1: Attach the cable gripper

Twist the cable gripper into the threads of the nut plate to securely connect it to the cloud.

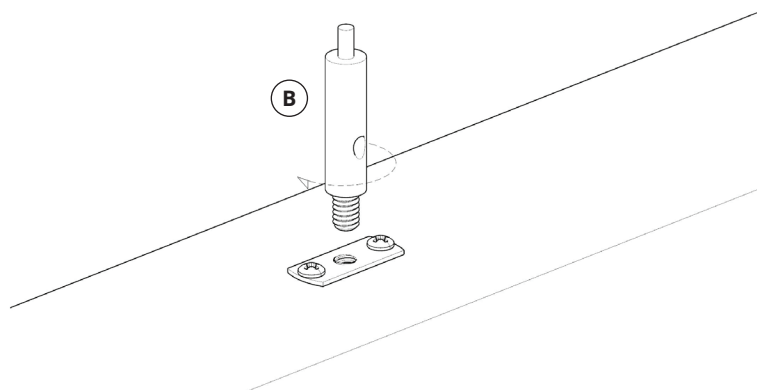

Step 2: Mark connection points and attach to ceiling

Use a measuring tape or laser level and a construction marker to measure and mark the desired ceiling connection location. If layout drawings are provided, reference them to ensure proper placement. Attach aircraft cables to your preferred ceiling mounting hardware (not provided by Acoufelt).

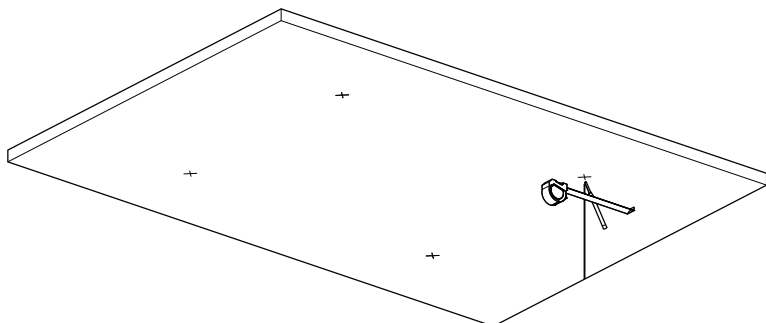


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025


Step 3: Insert the aircraft cable into the cable gripper

After the aircraft cable has been connected to the ceiling, insert the aircraft cable. Ensure the aircraft cable is correctly inserted by verifying that its end exits through the hole on the side of the cable gripper.

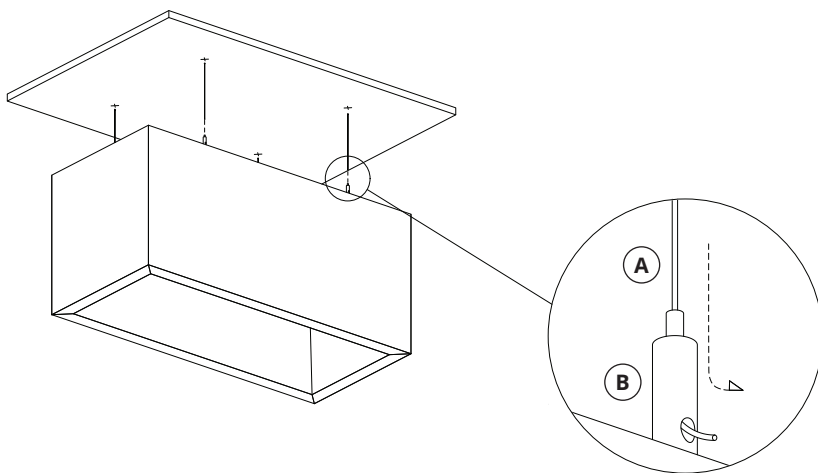

Step 4: Adjust aircraft cable length

Use the plunger on the cable gripper to adjust the length of the aircraft cable, setting the clouds to the desired height. Utilize a laser level or level to ensure all clouds are level and meet the specified design height. Once the clouds are properly positioned and level, trim the excess aircraft cable.

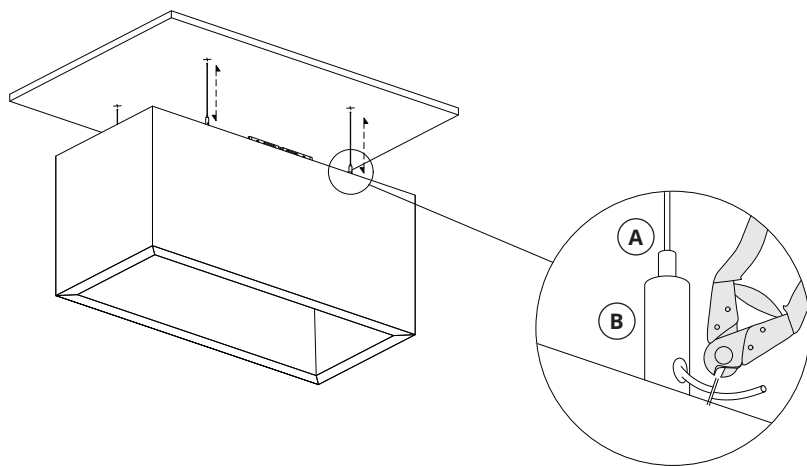

5 Swivel Cable to Deck


PARTS LIST*

A. 3/64" Aircraft cable

B. Cable coupler

C. Swivel gripper

*Quantities will vary

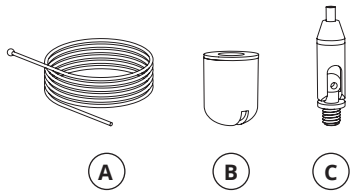

TOOLS

Measuring tape


Construction marker

Drill

Laser level/level


Safety glasses

Wire rope cutter

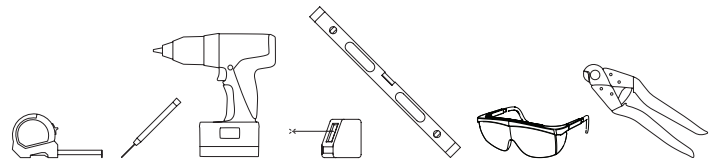


Step 1: Attach the swivel gripper

Twist the swivel gripper into the threads of the nut plate to securely connect it to the cloud.

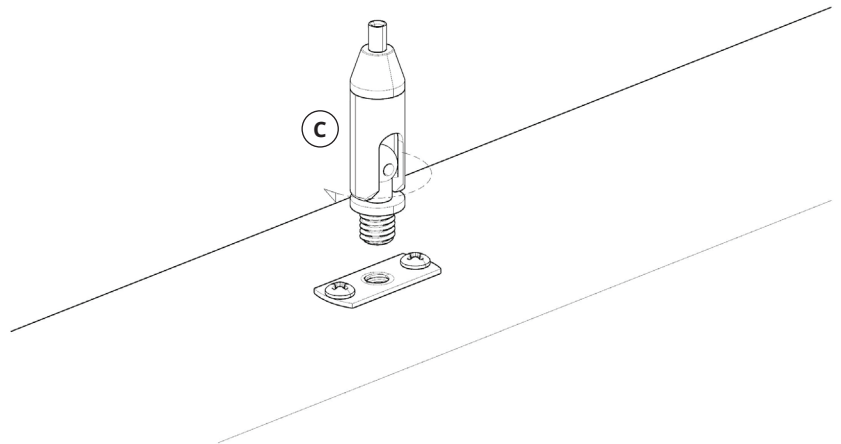

Step 2: Mark connection points

Use a measuring tape or laser level and a construction marker to measure and mark the desired deck connection location. If project-specific installation drawings have been provided, reference the connection layout to ensure proper placement/mounting locations.

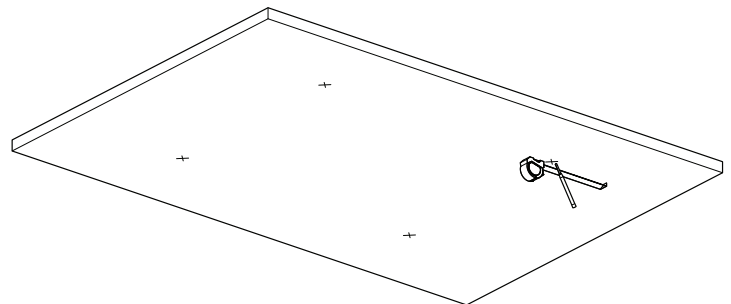


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025


Step 3: Prepare the cable coupler

Remove the screw nut from the cable coupler. Keep the coupler barrel accessible. Next, drill a hole into the deck, and secure the screw nut with an appropriate anchor or screw. **NOTE: Consult a structural engineer to determine the correct anchors or screws needed.**

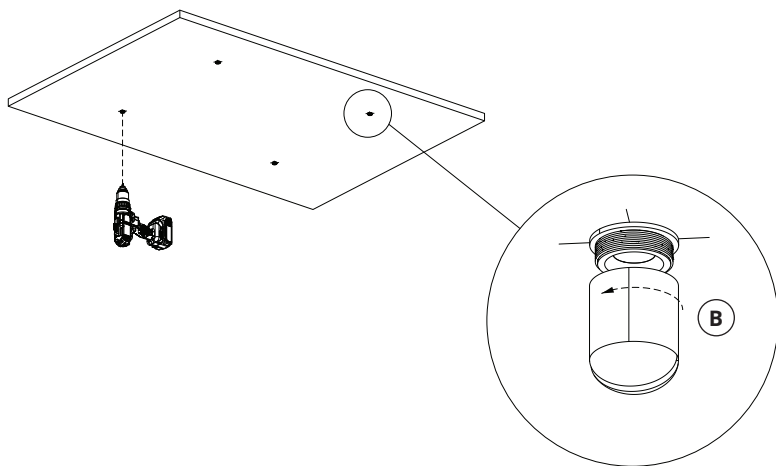


Step 4: Securing aircraft cable

Insert the aircraft cable into the bottom of the coupler barrel and ensure the aircraft cable feeds through fully so the ball stop rests securely inside the coupler barrel.

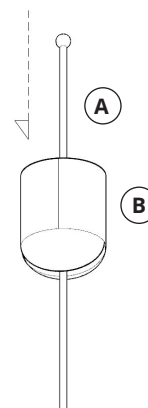


Step 5: Attach the coupler barrel

Attach the coupler barrel onto the screw nut by twisting clockwise. Ensure it is properly anchored to the deck.

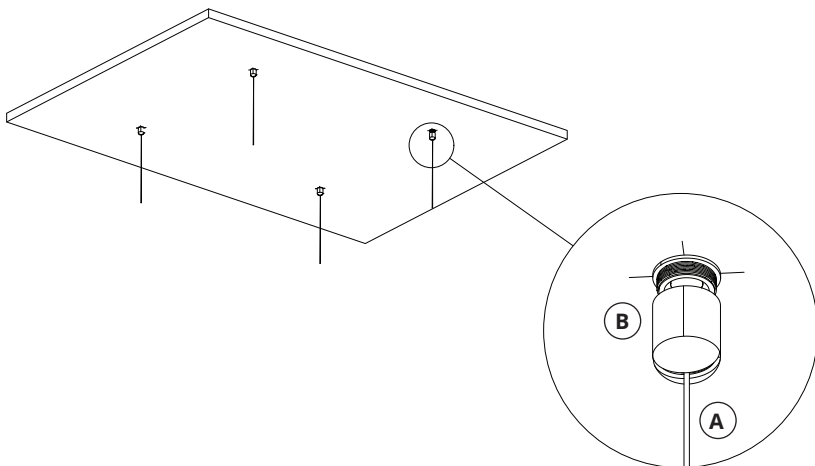


Step 6: Insert the aircraft cable into the swivel gripper

After the aircraft cable has been connected to the ceiling, insert the aircraft cable. Ensure the aircraft cable is correctly inserted by verifying that its end exits through the hole on the side of the cable gripper.

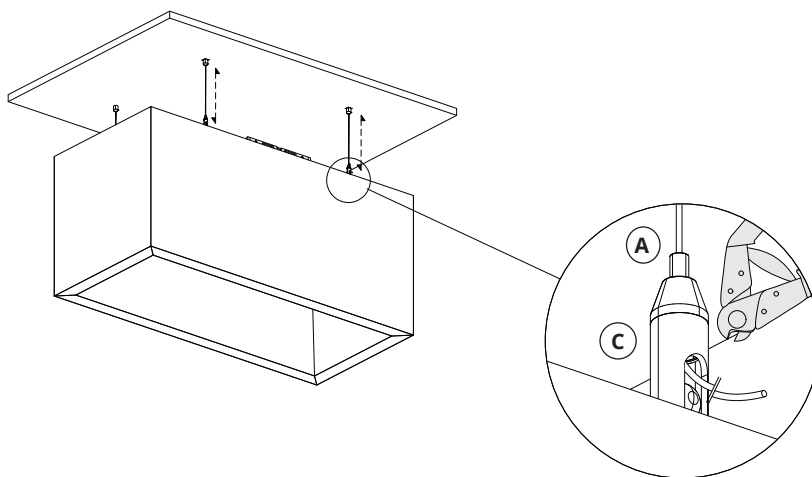

Step 7: Adjust aircraft cable length

Use the plunger on the swivel gripper to adjust the length of the aircraft cable, setting the clouds to the desired height. Utilize a laser level or level to ensure all clouds are level and meet the specified design height. Once the clouds are properly positioned and level, trim the excess aircraft cable.

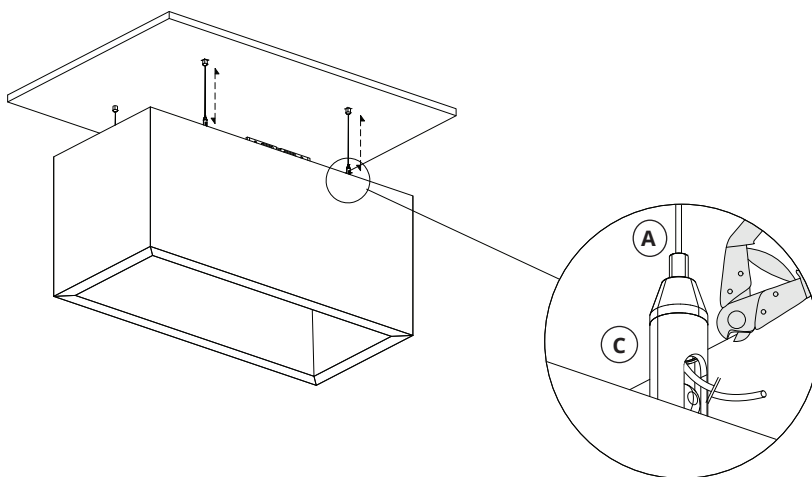

For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025

6 Threaded Rod Only

PARTS LIST*

A. Threaded rod

*Quantities will vary

TOOLS


Measuring tape

Construction marker

Laser level/level




A

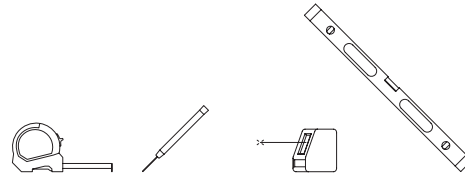


Step 1: Mark connection points and attach threaded rod to ceiling

Use a measuring tape or laser level and a construction marker to measure and mark the desired ceiling connection location. If layout drawings are provided, reference them to ensure proper placement. Attach threaded rod to your preferred ceiling mounting hardware (not provided by Acoufelt).

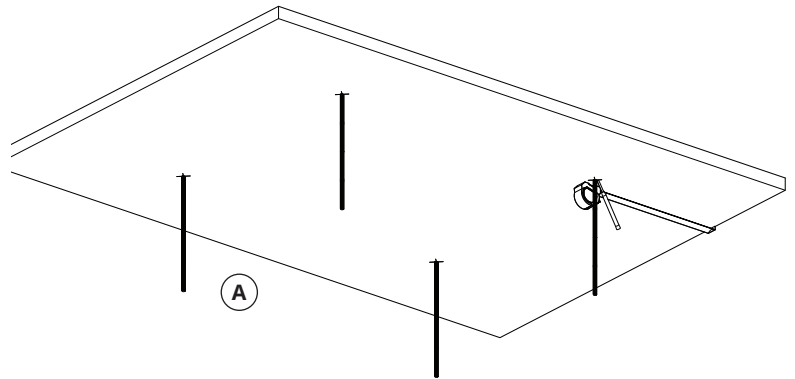

Step 2: Attach threaded rod to nut plate

Align the threaded rod to the nut plate and twist to attach. The threaded rod should be flush with the nut plate.

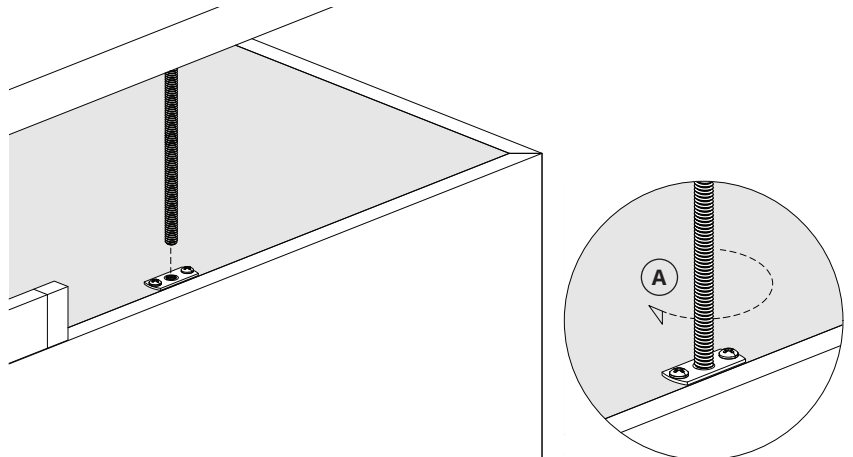


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025

Step 3: Verify cloud position

Ensure all the threaded rods are securely attached to the nut plate. Use a laser level or level to ensure all clouds are level, are equally spaced, meet the specific design height, and are centered from the starting point.

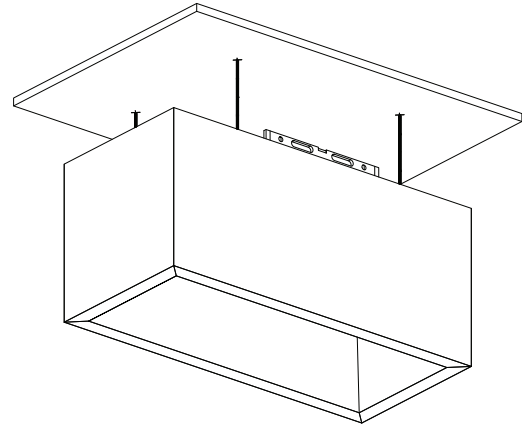

For questions or additional product information,
visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Cloud Nut Plate Instructions | June 2025

7 Threaded Rod to Strut Channel

PARTS LIST*


A. Channel nut

B. Flat washer

C. Hex nut

D. Threaded rod

*Quantities will vary

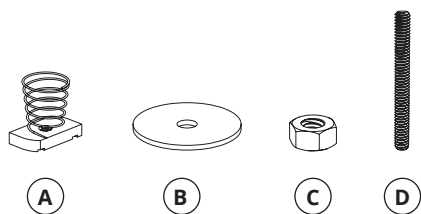


TOOLS

Measuring tape

Construction marker


Level

Laser level

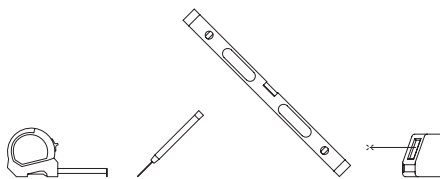


Step 1: Strut channel layout and installation

Layout the strut channels according to the installation drawing provided by Acoufelt or based on the desired spacing and starting point. Use a measuring tape to ensure precise spacing between channels. Refer to the strut channel manufacturer's guidelines for proper installation.

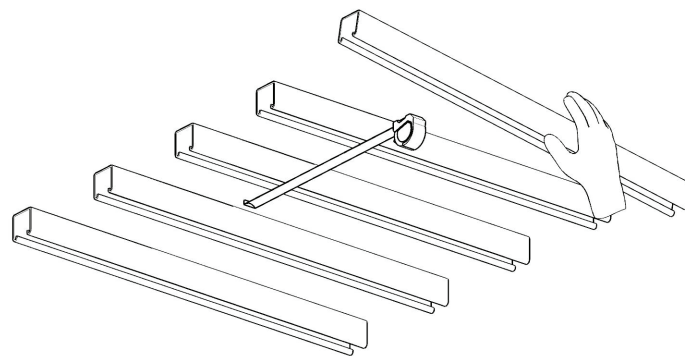

Step 2: Hardware layout and installation

Measure from the center of the specified starting point and mark the hardware connection locations on the strut channel. Insert the threaded rods into channel nuts and then insert the channel nut into the strut channel at the marked locations. Make sure the grooves in the channel nut sit on top of the rails of the strut channel.

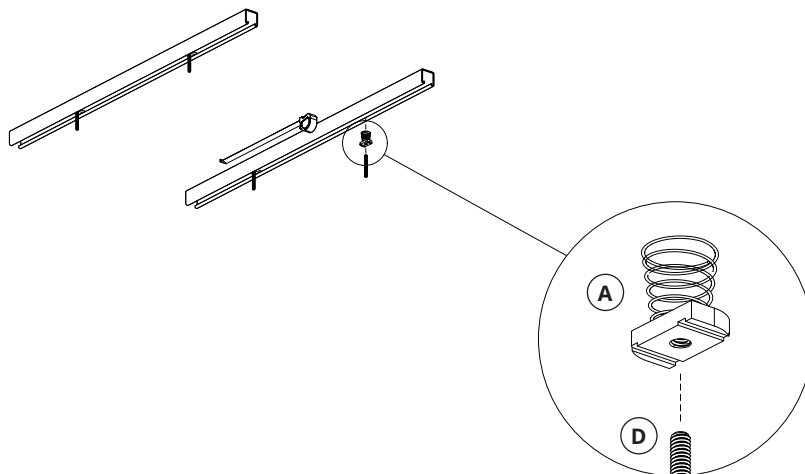


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.


Cloud Nut Plate Instructions | June 2025

Step 3: Attach washer and hex nuts

Place the flat washer onto threaded rod and fasten the washer tightly with the hex nuts. Confirm the washer and hex nuts are securely in place on the threaded rod.

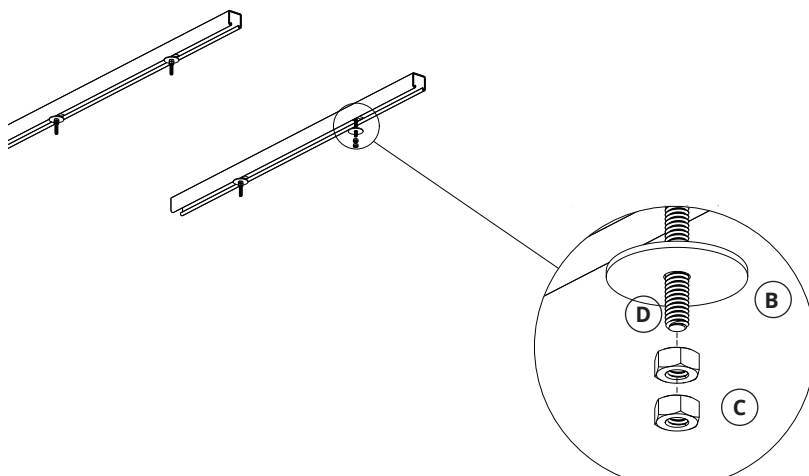**Step 4: Connect cloud to strut channel**

Attach the cloud to the strut channel by screwing the threaded rod into the nut plate. Hold the cloud steady while twisting because the threaded rod will exit the channel nut as it tightens into the nut plate.

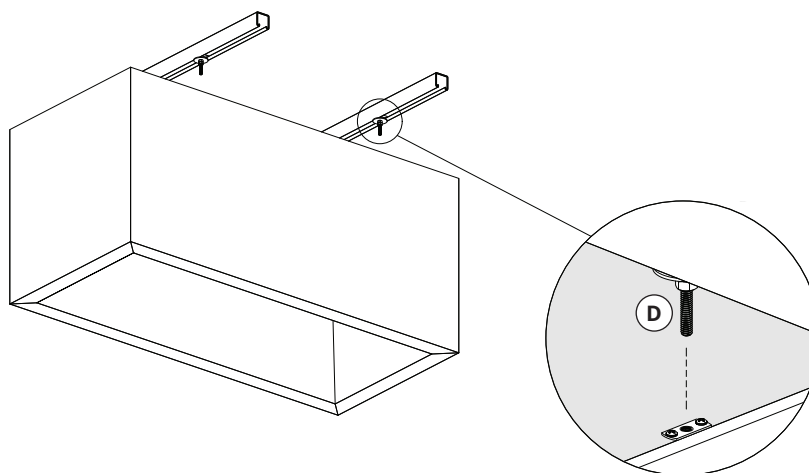**Step 5: Verify cloud position**

Ensure all the threaded rods are securely attached to both the nut plate and channel nut. Use a laser level or level to ensure all clouds are level, are equally spaced, meet the specific design height, and are centered from the starting point.

