



# Solid Panel

FilaSorb™ 7

acoufelt  
making quiet

# Product Detail

|                         |                                                                       |
|-------------------------|-----------------------------------------------------------------------|
| Product                 | Solid Panel                                                           |
| Surface                 | Wall or Ceiling                                                       |
| Composition             | 100% Polyester                                                        |
| Material                | FilaSorb™                                                             |
| Recycled Content        | 60% min.                                                              |
| Material Thickness      | 7mm   0.28" +/- 10%                                                   |
| Weight                  | 0.29 lb/ft <sup>2</sup> +/- 10%                                       |
| Standard Dimensions     | See page 3 for size offerings.<br>Custom size available upon request. |
| Lead Time               | Ships in 4-6 weeks                                                    |
| Light Fastness Warranty | 10 Years*                                                             |


\* conditions apply

# Technical Data

|                         |                                                 |
|-------------------------|-------------------------------------------------|
| Fire Test Method Number | AS ISO 9705:Group 1<br>ASTM E84-17a Class A     |
| Indoor Air Quality      | Low VOCs emission, formaldehyde and Phenol-free |
| Light Fastness          | ISO 105-B02 1994, 6-7                           |

# Acoustic Performance

Sound Absorption ISO 354-2006 NRC 0.25

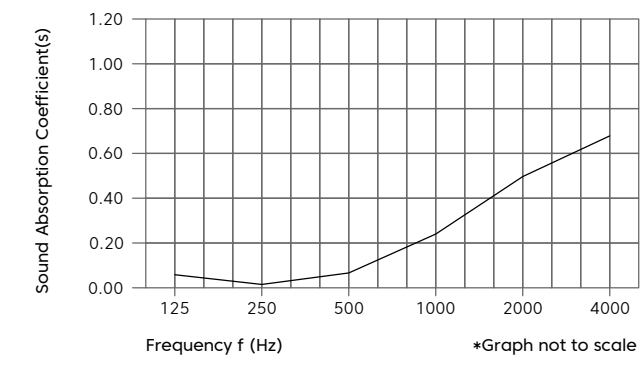

| Frequency f(Hz)    | 125  | 250  | 500  | 1000 | 2000 | 4000 | NRC  |
|--------------------|------|------|------|------|------|------|------|
| 7mm α <sub>s</sub> | 0.06 | 0.02 | 0.08 | 0.28 | 0.57 | 0.78 | 0.25 |

# Colorways

\* Go To Colorway Page



Manufactured & Assembled in the USA


# Environmental Attributes

- Declare Certification
- LBC Red List Free
- Phenol And Formaldehyde Free
- Low VOC
- CDPH Compliance
- Aligns With Building Standards



# Design

## Elevation

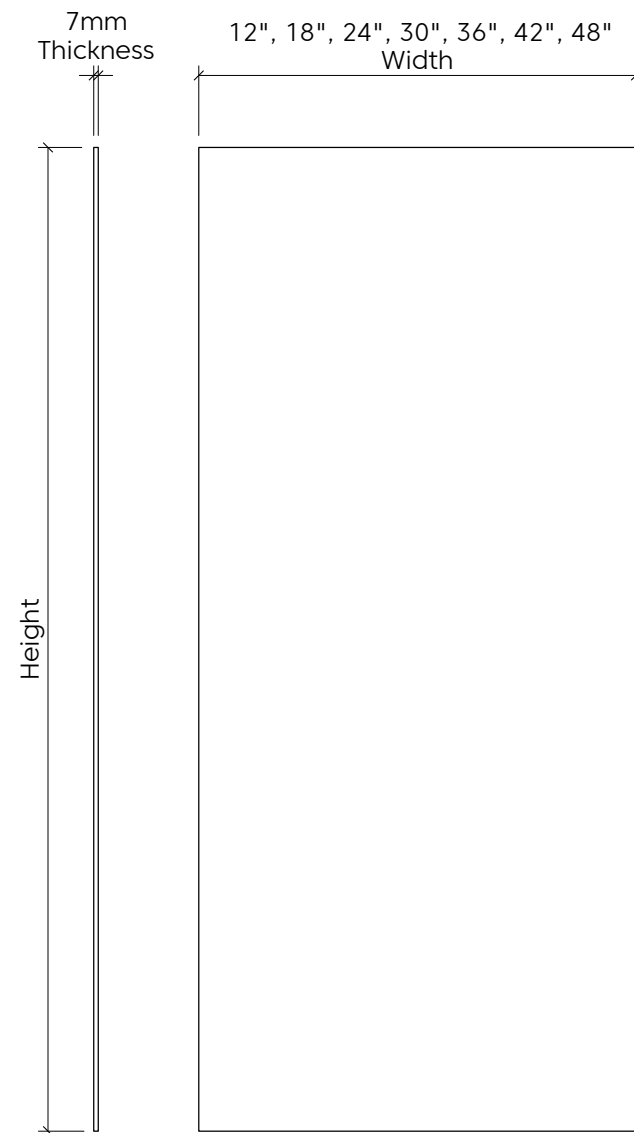

## Perspective




## Standard Size Offerings


| Standard Heights |      |       |
|------------------|------|-------|
| 12"H             | 48"H | 84"H  |
| 18"H             | 54"H | 90"H  |
| 24"H             | 60"H | 96"H  |
| 30"H             | 66"H | 102"H |
| 36"H             | 72"H | 108"H |
| 42"H             | 78"H | 110"H |

# Mounting Methods


## Adhesive Backing

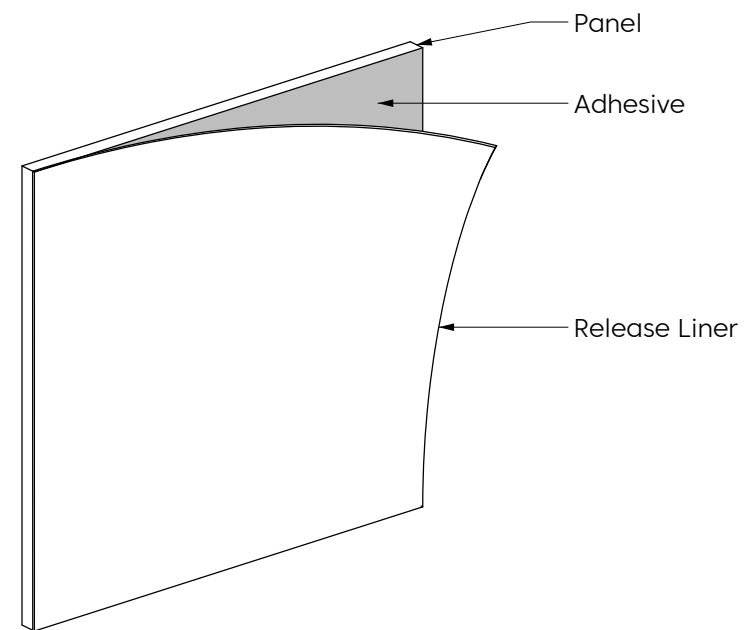

## Construction Adhesive

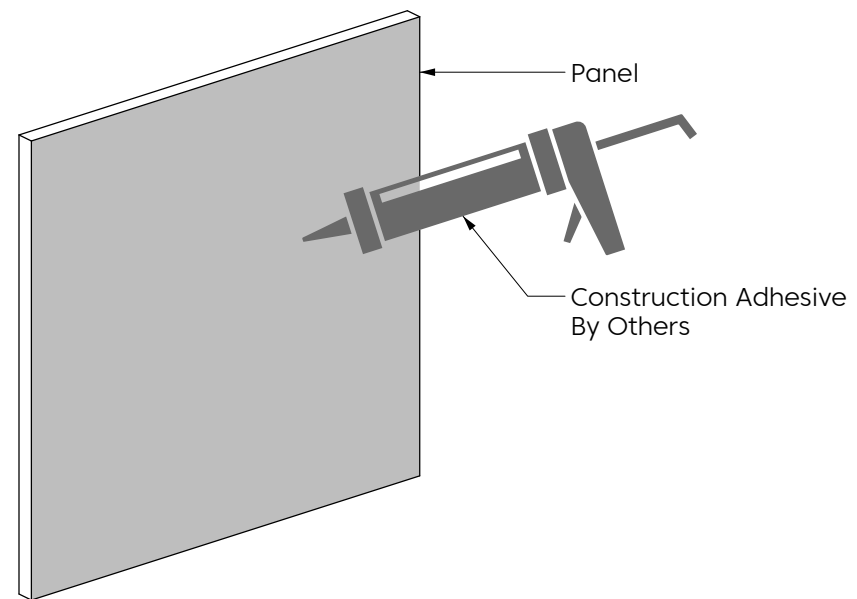

## Z-Clip Wall Mount

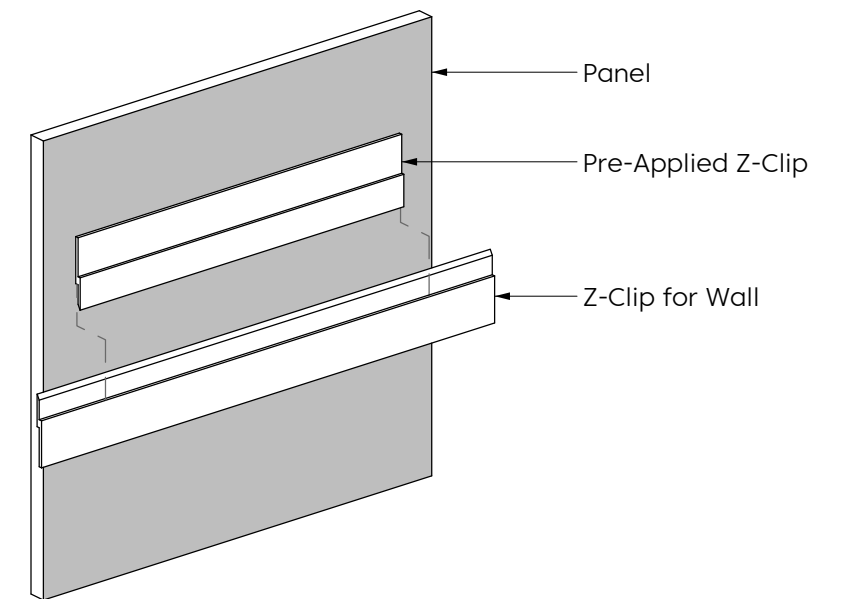

\*For wall mount application only