



Linear Ceiling Baffles

Premier Collection

Linear acoustic baffles create a quiet massing of sound absorbing ceiling surfaces for meeting rooms, cafeterias, common spaces, or street-facing offices – anywhere unwanted sound is a problem. Easy to specify and install, ceiling baffles are a great first course in your soundscaping strategy.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Thickness	1/2", 12mm (±10%) 1", 24mm (±10%)
Weight	0.49 lb./ft² (±10%) 0.98 lb./ft² (±10%)
Standard Sizes	Height: 4" up to 24" (2" increments) Lengths: Range from 12" up to 110" <i>See page 4 for more details. Custom sizes available</i>



Linear Ceiling Baffle in Almond

Technical

NRC Rating	12mm 1.30 24mm 1.15
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Health Product Declaration (HPD)** Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.

** HPD only applies to 12mm thickness.



© The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



Call **800.966.8557** with questions or visit **acoufelt.com** for more product information, downloads, and colorways.

Colorways

PREMIER

							
White WH12	Almond AL55	Celery CE65	Sencha SE58	Metal ME03	Flamingo FL61	Quartz QU67	Turmeric TU60
							
Platinum PL04	Pearl PE21	Pistachio PI25	Thistle TH28	Stonewash ST72	Amethyst AM69	Valentine VA70	Wheat WH68
							
Grey GR02	Ivory IV11	Eucalyptus EU71	Peacock PE20	Periwinkle PE23	Lilac LI13	Peach PE19	Popcorn PO26
							
Slate SL27	Umber UM54	Wasabi WA29	Sea Salt SE57	Marine MA15	Berry BE06	Peppercorn PE22	Carrot CA08
							
Charcoal CH01	Walnut WA56	Oregano OR18	Azure AZ05	Iris IR10	Flint FL64	Shiraz SH63	Currant CU59
							
Piano Black PI24	Midnight MI16	Kale KA12	Denim DE09	Granite GR62			

Order samples at acoufelt.com/colorways


Sizes

Standard Heights 4" up to 24" (2" increments)
Custom sizes available

Thickness 1/2", 12mm (±10%)
 1", 24mm (±10%)






Standard Lengths 12, 18, 24, 30, 36, 42, 48, 54, 60, 66, 72, 78, 84,
 90, 96, 102, 108, 110" L
Custom sizes available

Height
4"
6"
8"
10"
12"
14"
16"
18"
20"
22"
24"

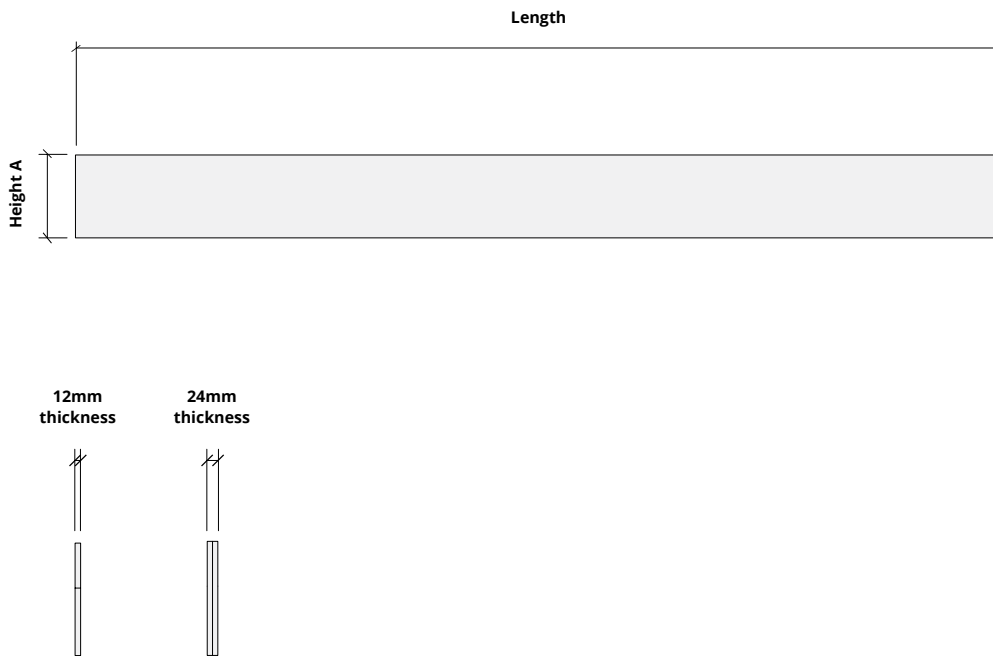


Hardware Spacing

12, 18" L	6" on center spacing
24, 30" L	12" on center spacing
36, 42, 48, 54" L	24" on center spacing
60, 66, 72, 78, 84, 90" L	24" on center spacing
96, 102, 108, 110" L	30" on center spacing

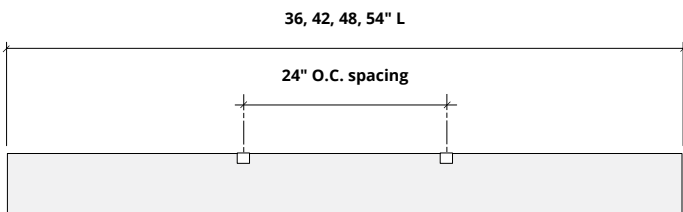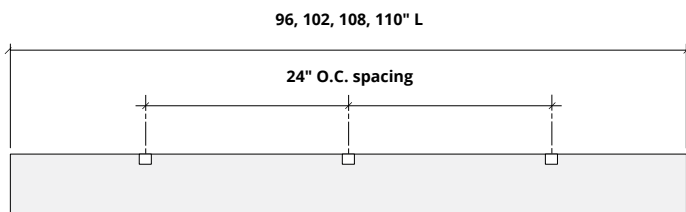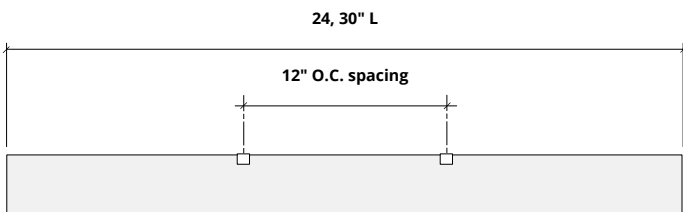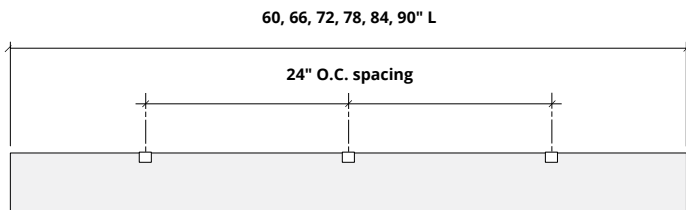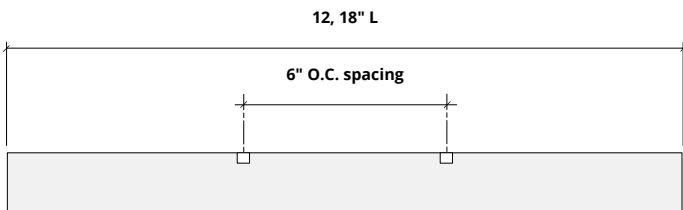


Mounting Methods


Cable

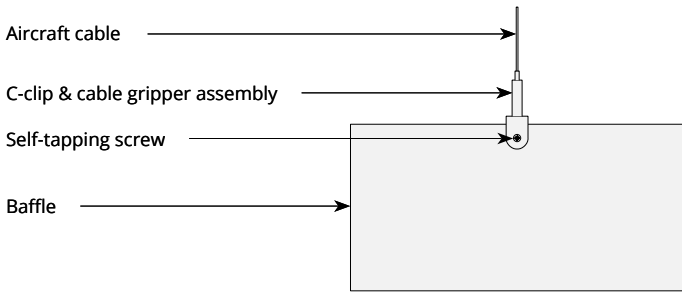


Cable to deck

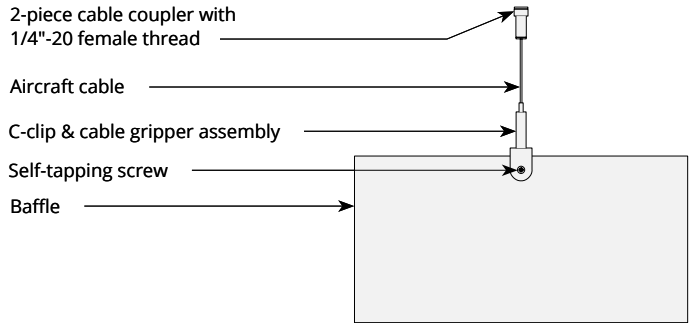


Cable to T-grid

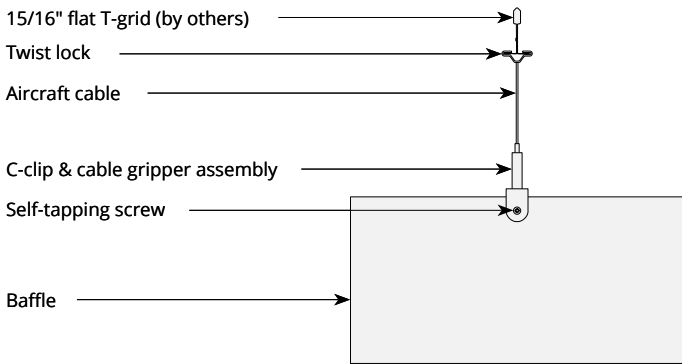


Cable to Unistrut

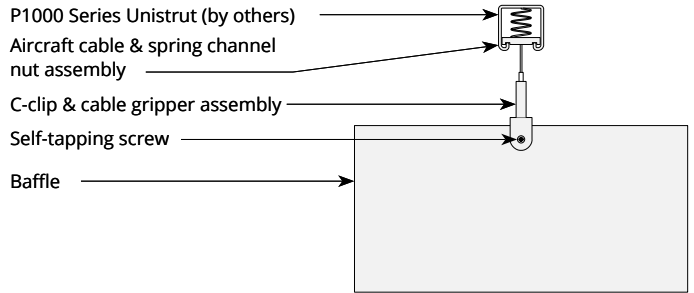

Swivel cable to deck

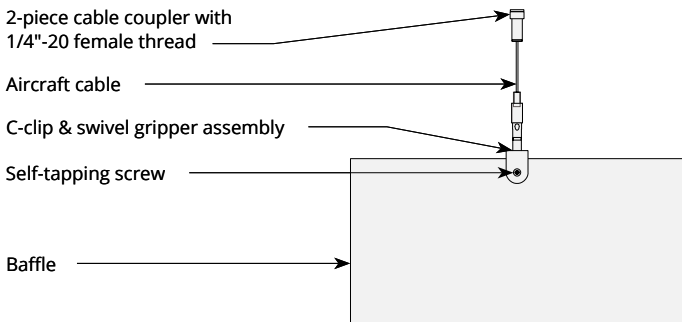


Magnet to T-grid

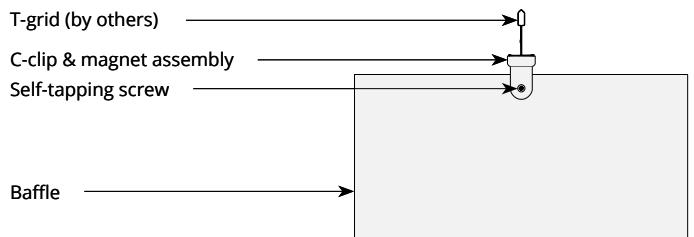


Mounting Methods cont'd.


Threaded rod

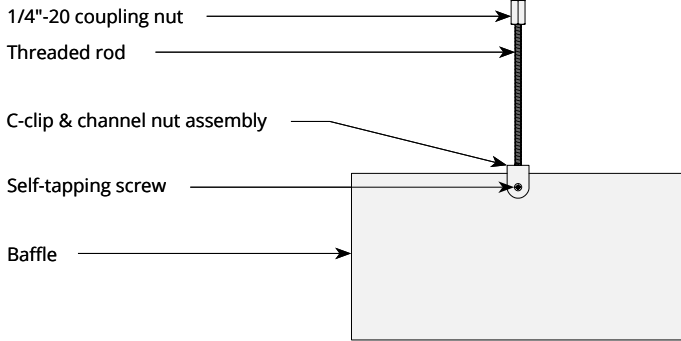


Threaded rod to Unistrut

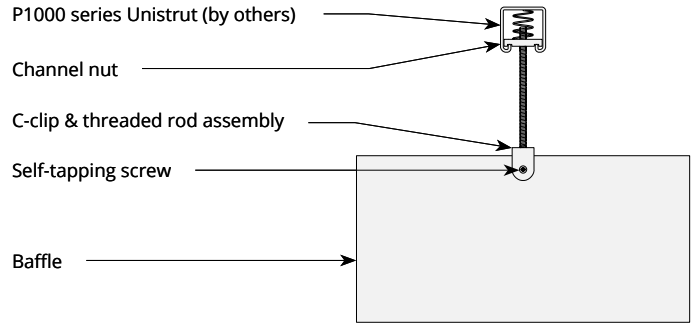

Direct to Unistrut

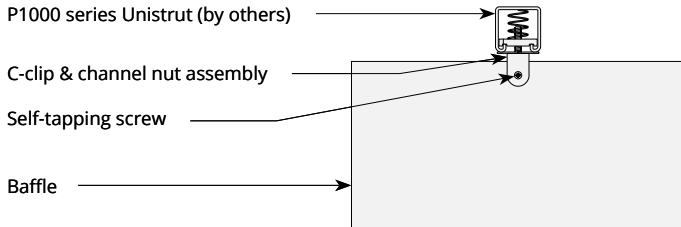


Twist lock to T-grid

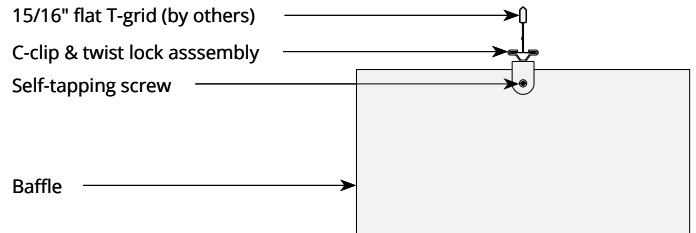

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Sample tested 6 baffles 110" L x 12" D, 12mm and 24mm thickness, sample hanging 600mm from floor and 6" O.C. from each other

Test Results	12mm
	NRC 1.30
	SAA 1.32
	24mm
	NRC 1.15
	SAA 1.19

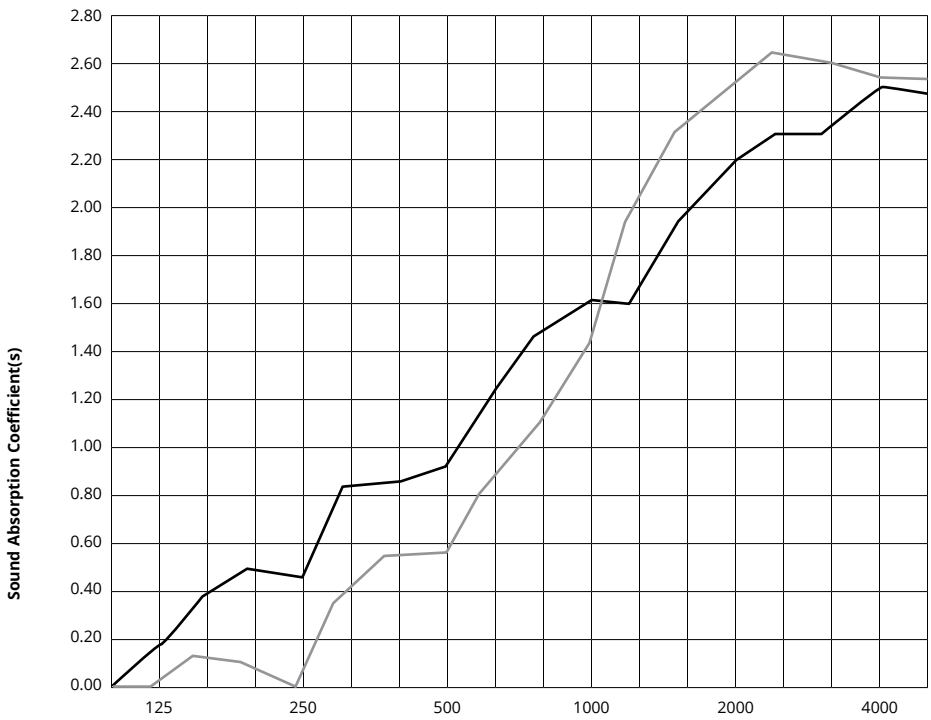

	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm	0.17	0.44	.93	1.62	2.20	2.51	1.30
	24mm	0.01	0.00	0.56	1.45	2.52	2.55	1.15

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.