




Beam Ceiling Baffle

Premier Collection

Beam ceiling baffles offer a striking and versatile way to absorb unwanted sound. Available in a variety of sizes and made with exacting precision, the Beam baffles can easily become the focal point of a space. The long, lean design of Beam baffles maximizes sound absorption with a minimalist aesthetic. You can choose single- or multi-color arrangements depending on how much of a statement is desired.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Thickness	1/2", 12mm (±10%)
Weight	0.49 lb./ft ² (±10%)
Standard Sizes	Height: 8" up to 16" H (2" increments) Thickness: 2, 3 or 4" T Length: 10' up to 18' L (2' increments) <i>Custom sizes available</i>

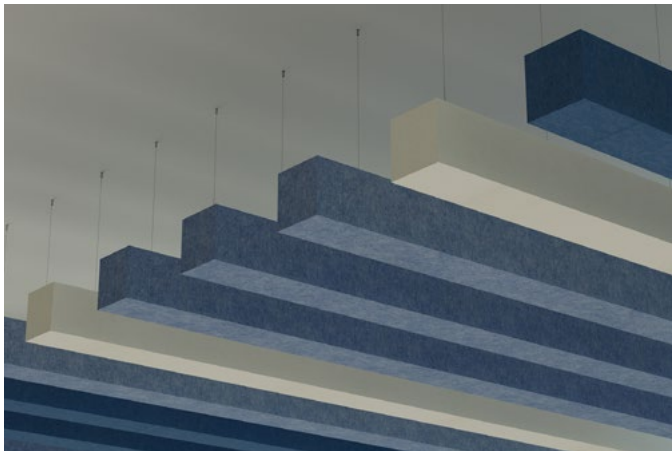

Beam Ceiling Baffles in Periwinkle, Marine and White

Technical

NRC Rating	1.65
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



Colorways

PREMIER

							
White WH12	Almond AL55	Pistachio PI25	Celery CE65	Metal ME03	Flamingo FL61	Quartz QU67	Turmeric TU60
							
Platinum PL04	Pearl PE21	Eucalyptus EU71	Sencha SE58	Periwinkle PE23	Amethyst AM69	Valentine VA70	Wheat WH68
							
Grey GR02	Ivory IV11	Wasabi WA29	Sea Salt SE57	Marine MA15	Lilac LI13	Peach PE19	Popcorn PO26
							
Slate SL27	Umber UM54	Thistle TH28	Peacock PE20	Iris IR10	Berry BE06	Peppercorn PE22	Carrot CA08
							
Charcoal CH01	Walnut WA56	Oregano OR18	Azure AZ05	Granite GR62	Flint FL64	Shiraz SH63	Currant CU59
							
Piano Black PI24	Midnight MI16	Kale KA12	Denim DE09				

Order samples at acoufelt.com/colorways




Call 800.966.8557 with questions or visit acoufelt.com for more product information, downloads, and colorways.

Sizes


Standard Sizes Height: 8" up to 16" H (2" increments)
 Thickness: 2, 3 or 4" T
 Length: 10' up to 18' L (2' increments)
Custom sizes available

Thickness 1/2", 12mm (±10%)






Elevation

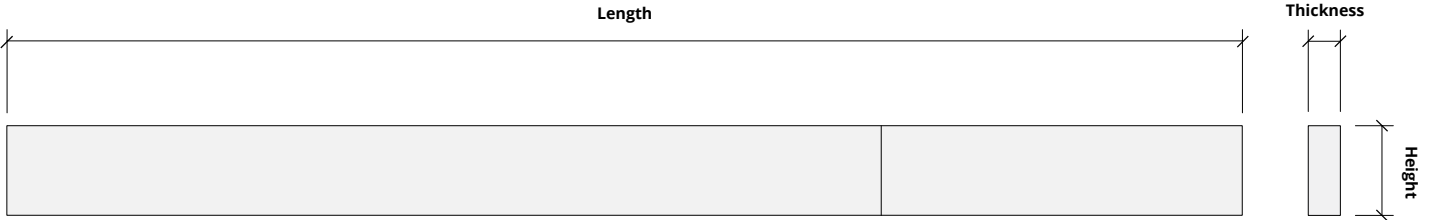

Plan








Visible Seam Spacing

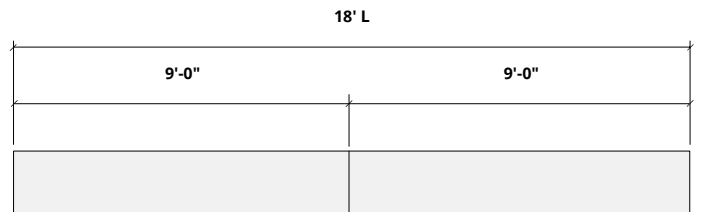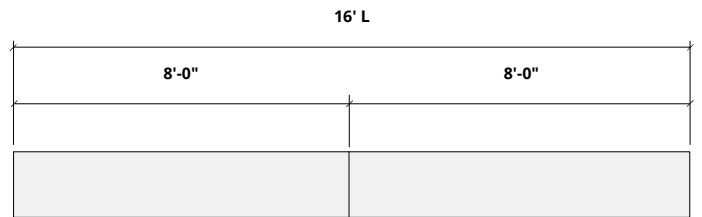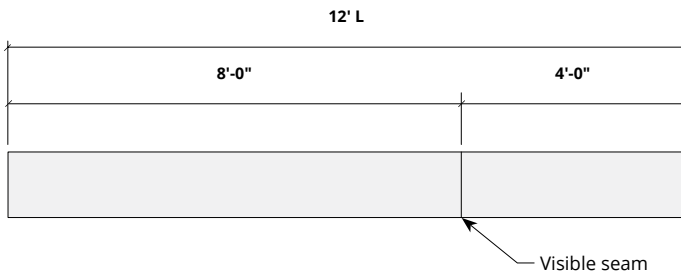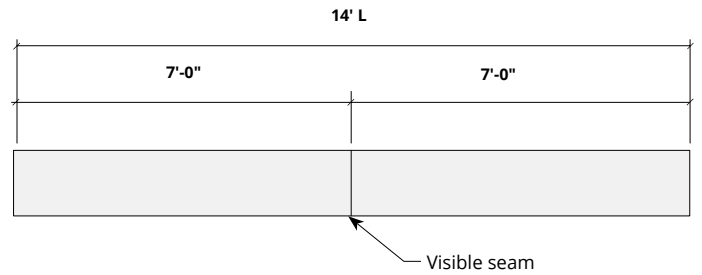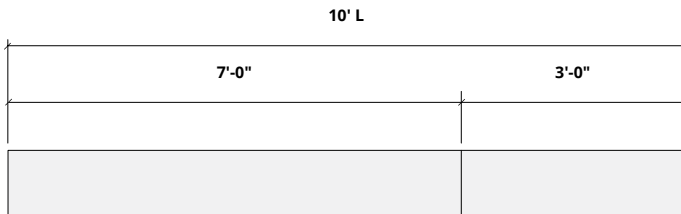


Hardware Spacing

10' L	72" on center spacing
12' L	96" on center spacing
14' L	72" min / 120" max on center spacing
16' L	96" on center spacing
18' L	120" on center spacing

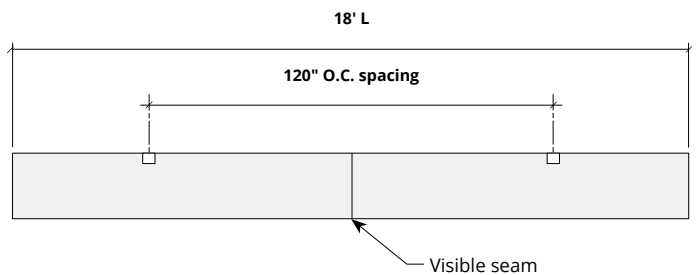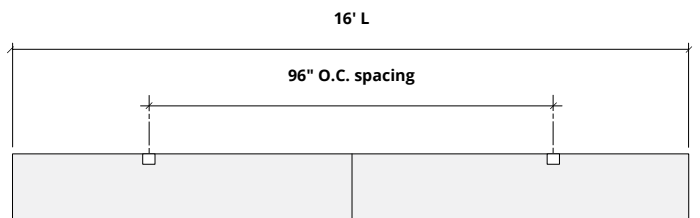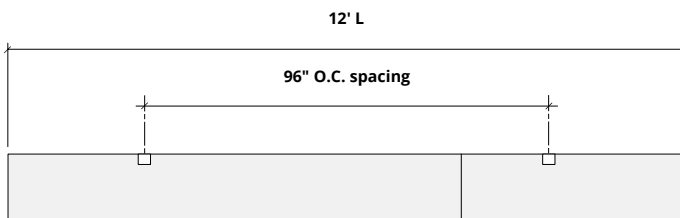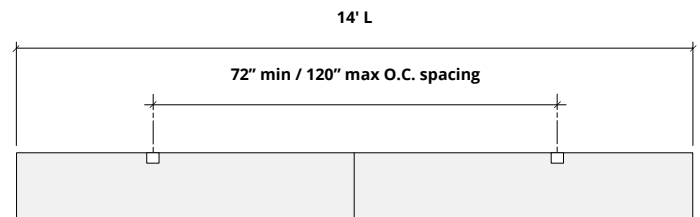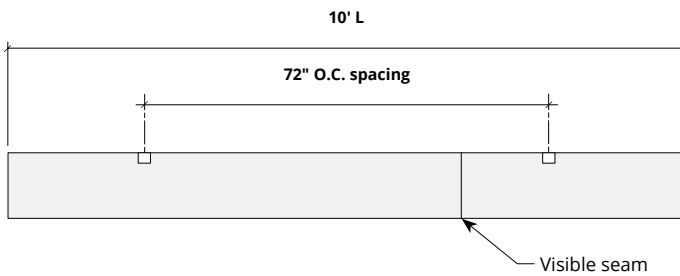


Mounting Methods


Cable

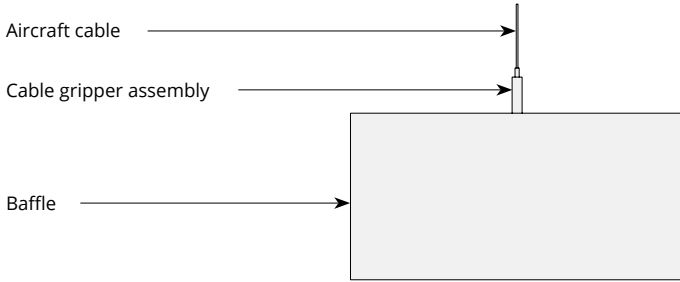


Cable to deck

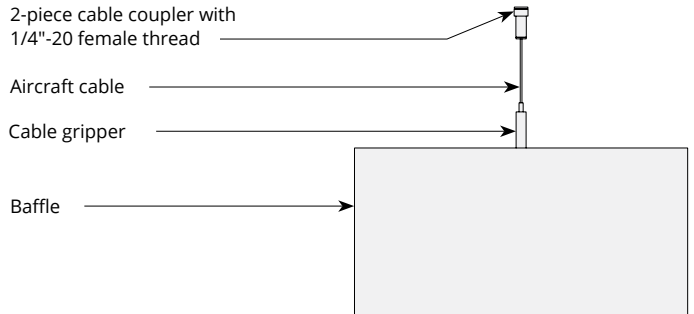


Cable to T-grid

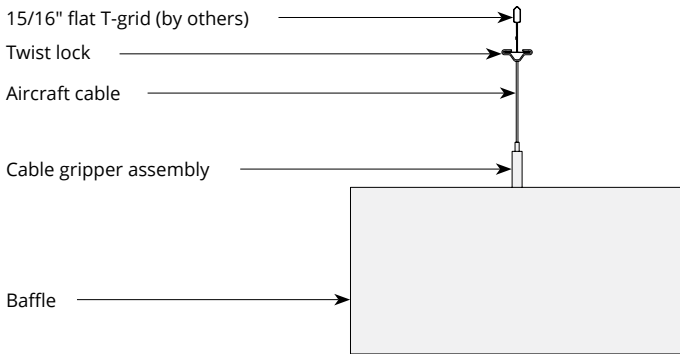


Cable to Unistrut

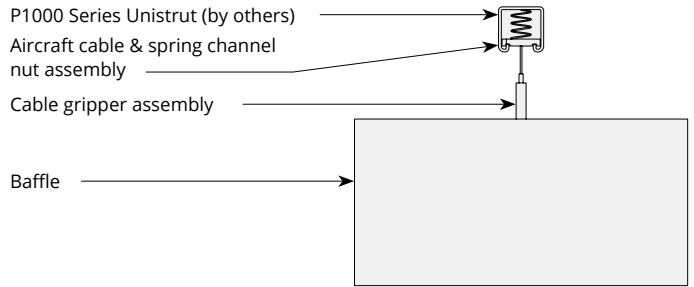

Swivel cable to deck

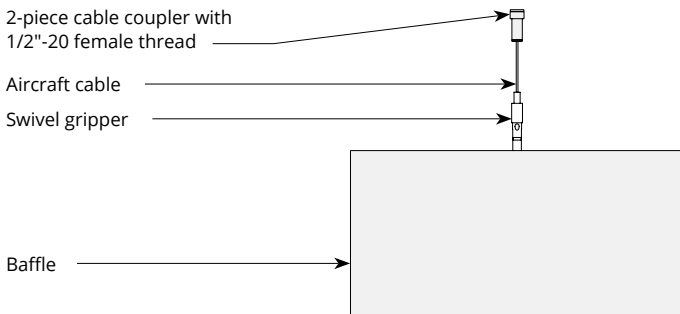


Magnet to T-grid

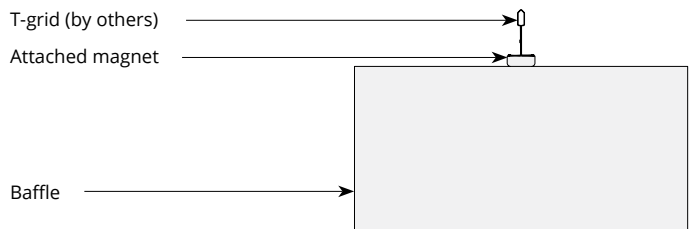


Mounting Methods cont'd.


Threaded rod

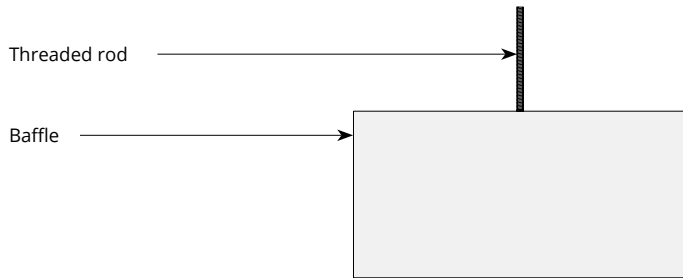


Threaded rod to Unistrut

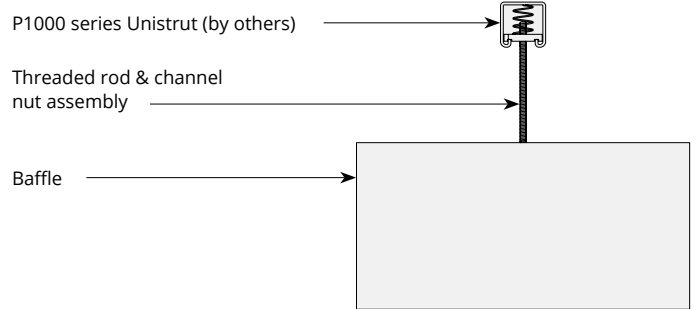

Direct to Unistrut

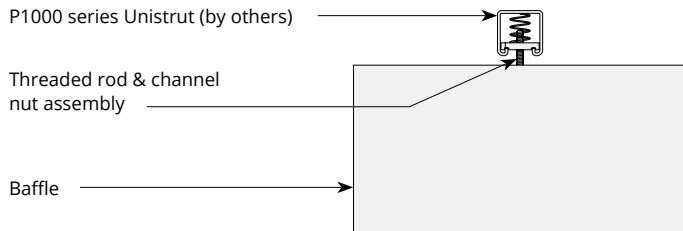


Twist lock to T-grid

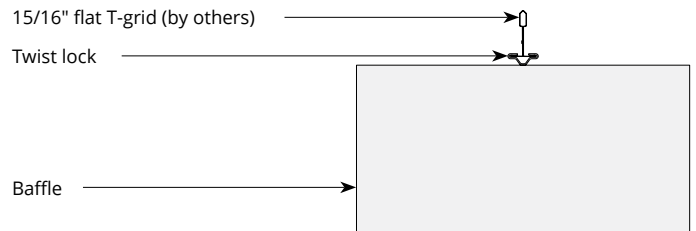

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Sample tested 5 baffles 110" L x 12" H x 3" T, hanging 600mm from floor and 152mm from each other
Test Results	NRC 1.65 SAA 1.68

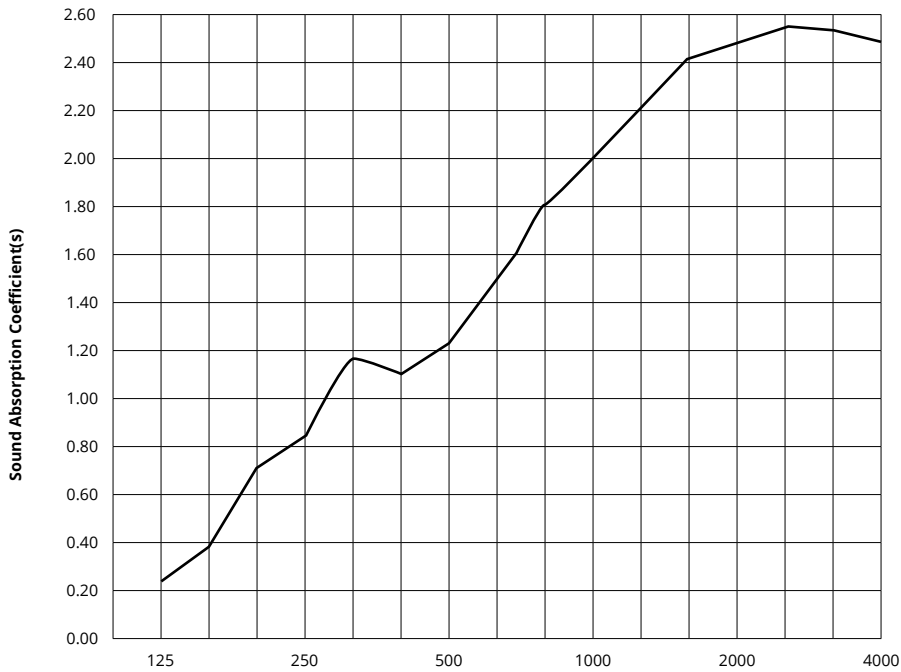

Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
3" Truss Baffle	0.26	0.86	1.25	2.02	2.49	2.49	1.65

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

